

VIM GROUP | **TEAM
FARNER**

Solvay ECo

Sign family

Version: V1-1

Date: 22-02-2024

No rights can be claimed from this sign family. The design is solely for price calculations and possible planning permission. These are not constructive drawings. The object is designed for normal use. The measurements, as indicated, may differ slightly in reality. This sign family is subject to change depending on a technical survey.



Introduction

Sign family Solvay ECo

Welcome to the comprehensive guide for Solvay's global signage. This document is pivotal in establishing a cohesive and impactful representation of Solvay across various facilities. It serves as a foundational blueprint for our new sign family, which is integral to Solvay's worldwide presence.

Within these pages, you will discover detailed technical specifications and design principles critical for producing all signage elements. These guidelines are crafted with meticulous care to ensure uniformity and quality, reflecting the ethos and visual identity of Solvay at every location.

More than just a set of instructions, the sign family outlined here represents the essence of Solvay's brand presence along the visitor journey across all the global locations. With the global rollout in view, the adherence to these specifications is essential. They are crafted to guarantee that each sign, irrespective of its location, aligns with the core values and aesthetics of Solvay, fostering a consistent and globally recognizable brand image.

We encourage you to explore this document thoroughly to grasp the vision and standards established for Solvay's global signage. Your commitment to these guidelines is crucial for the successful and consistent portrayal of Solvay's brand identity around the world.

For inquiries about site signage guidelines or assistance with large-scale installations, please contact Anne-Solenne Chapuis and Laura Hanin from the Group Branding Team for support.



Corporate colour specifications

Sign family Solvay ECo

Colour palette

Corporate colour

Sky Blue

Sky Blue

Pantone: 2171 C
C:82 M:32 Y:0 K:0
R:84 G:149 B:252
HEX: #5495FC

Secondary colours

Medium Blue

Soft Blue

White

Medium Blue

Pantone: 7451 C
C:54 M:22 Y:0 K:0
R:125 G:172 B:237
HEX: #7DACEB

Soft Blue

Pantone: 543 C
C:42 M:11 Y:00 K:00
R:166 G:204 B:231
HEX: #A6CCE7

White

Pantone:
C:0 M:0 Y:0 K:0
R:255 G:255 B:255
HEX: #ffffff

Font usage

Sign family Solvay ECo

Header usage and main language

Headers

Roboto Medium

Small headlines and second language

Small headlines

Roboto Regular

General production and installation guidelines

Sign family Solvay ECo

As part of our commitment to excellence in brand implementation, we oversee the production and installation processes of our signage to ensure they meet the highest standards of quality and safety. In this regard, we outline the following responsibilities and warranties:

Responsibilities

Supplier Responsibility: Suppliers are expected to strictly adhere to the specifications provided in this document. This includes the responsibility for the safe delivery and assembly of units, and ensuring all elements are manufactured and installed in compliance with the local laws and safety standards.

Client Responsibility: The client or their representative is responsible for the timely provision of site-specific requirements and approvals, including but not limited to approvals of design engineering drawings and calculations.

Consultant Oversight: As brand implementation consultants, our role includes monitoring the adherence to these guidelines, liaising between suppliers and clients, and ensuring a consistent brand experience across all sites.

Warranties

Quality Assurance: All signage units are warranted to be free from manufacturing defects in material and workmanship under normal use for a specified period from the date of installation.

Compliance Warranty: We warrant that all products comply with the relevant local regulations and standards, including but not limited to construction, electrical, and environmental standards.

Safety

The units and construction - both internal and external - must not have sharp edges that could cause injury when used normally.

Foundations

Concrete to be proportionate to the size of the element. Details are to be confirmed by the installer per site.

Wind resistance

The units and their supporting structures should be fit for purpose according to local regulations. A qualified design engineer must produce all applicable design engineering drawings and calculations. The aforementioned drawings and calculations must be submitted to the principal and/or their representative for monitoring and approval.

The supplier always remains responsible for the delivery and assembly of the units, not withstanding the approval.

Water and dust-proofing

All lighting units must be compliant with the classification IP67 or higher.

Ventilation and condensation

Condensation/overflow holes with a 5 mm / 1/8 inch diameter must be fitted to the appropriate units at the lowest possible point of the construction. Should it be necessary to fit more holes, these should be fixed at regular intervals. The holes must be fixed in such a manner that no light can 'leak' to the outside. The holes must be in place before the illuminated sign is coated, and after the coating process, it should be ensured that they are sufficiently open.

General production and installation guidelines

Sign family Solvay ECo

Fastenings

Stainless steel bolts/screws, Quality A2, Class 70 Rivets should be aluminium.

Electrical

All electronics shall be compliant with all National Electrical Standards or Codes, including but not limited to IEC 60634, NEC, ANSI, etc. All units and electrical switches should be sufficient to comply with local standards. Frontage must be connected to the safety wiring of the supply installation. Each unit must have an earth connection.

Paint

The total layer thickness of all paint should be at least 80 micrometres. The overall finish should have a gloss between 60 and 70%.

Edges

All edges should be of high quality without any sharp edges.

Biodiversity

If you are concerned about the effect of illuminated signage on biodiversity, we advise that you contact your local wildlife centres to determine which elements to install.

Bounding box horizontal logo

Sign family Solvay ECo

Bounding box

The bounding box for the Solvay logo ensures visual clarity and brand consistency across all signage elements. It is defined as follows:

Clear Space: To ensure visibility and impact, a minimum clear space, equivalent to the width of the letter 'L' in the Solvay logo, must be maintained around the entire logo.

Proportions: The logo must be centred within the bounding box and scaled proportionally to maintain the integrity of the logo's dimensions.

Background: The logo's bounding box must remain unobstructed and not be overlaid with patterns or imagery impairing legibility.

Global Consistency: These guidelines apply to all Solvay signage globally to ensure brand consistency. Any deviations must be approved by the brand implementation team.




Visitor journey

Sign family Solvay ECo

Visitor journey

The sign family is comprised of multiple assets and is designed to support the visitor journey as they navigate their way through a Solvay site or facility. Some elements provide long-distance recognition, such as building signs installed at high level, and others provide directional guidance to visitors.

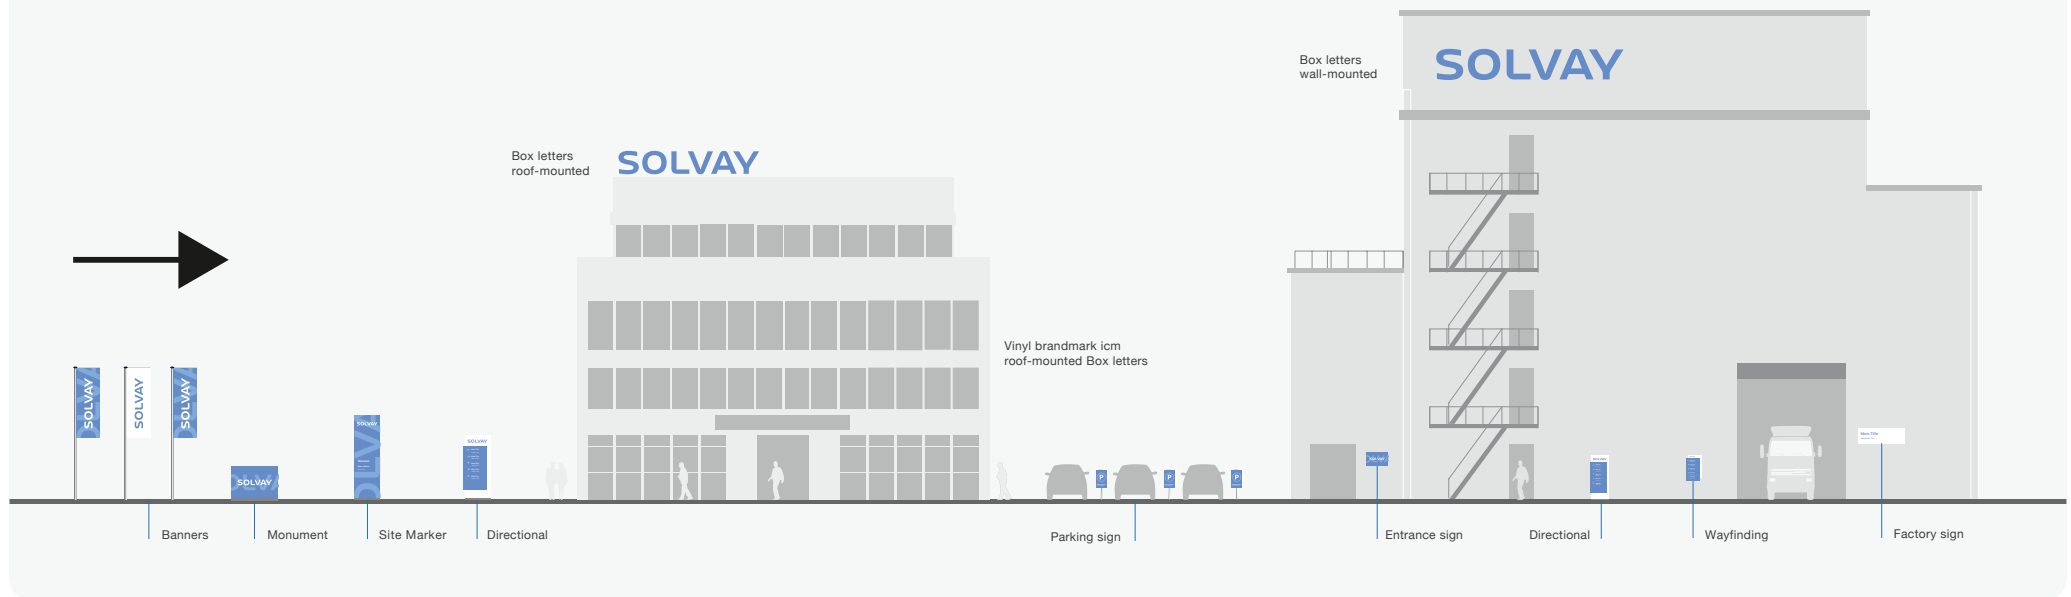

Overview external elements - High-level signage

Sign family Solvay ECo

Box letters blue – Wall

SOLVAY

Box letters blue– Roof

SOLVAY

Box letters white – Wall

SOLVAY


Overview external elements - Site Markers

Sign family Solvay ECo



Overview external elements - Directionals

Sign family Solvay ECo


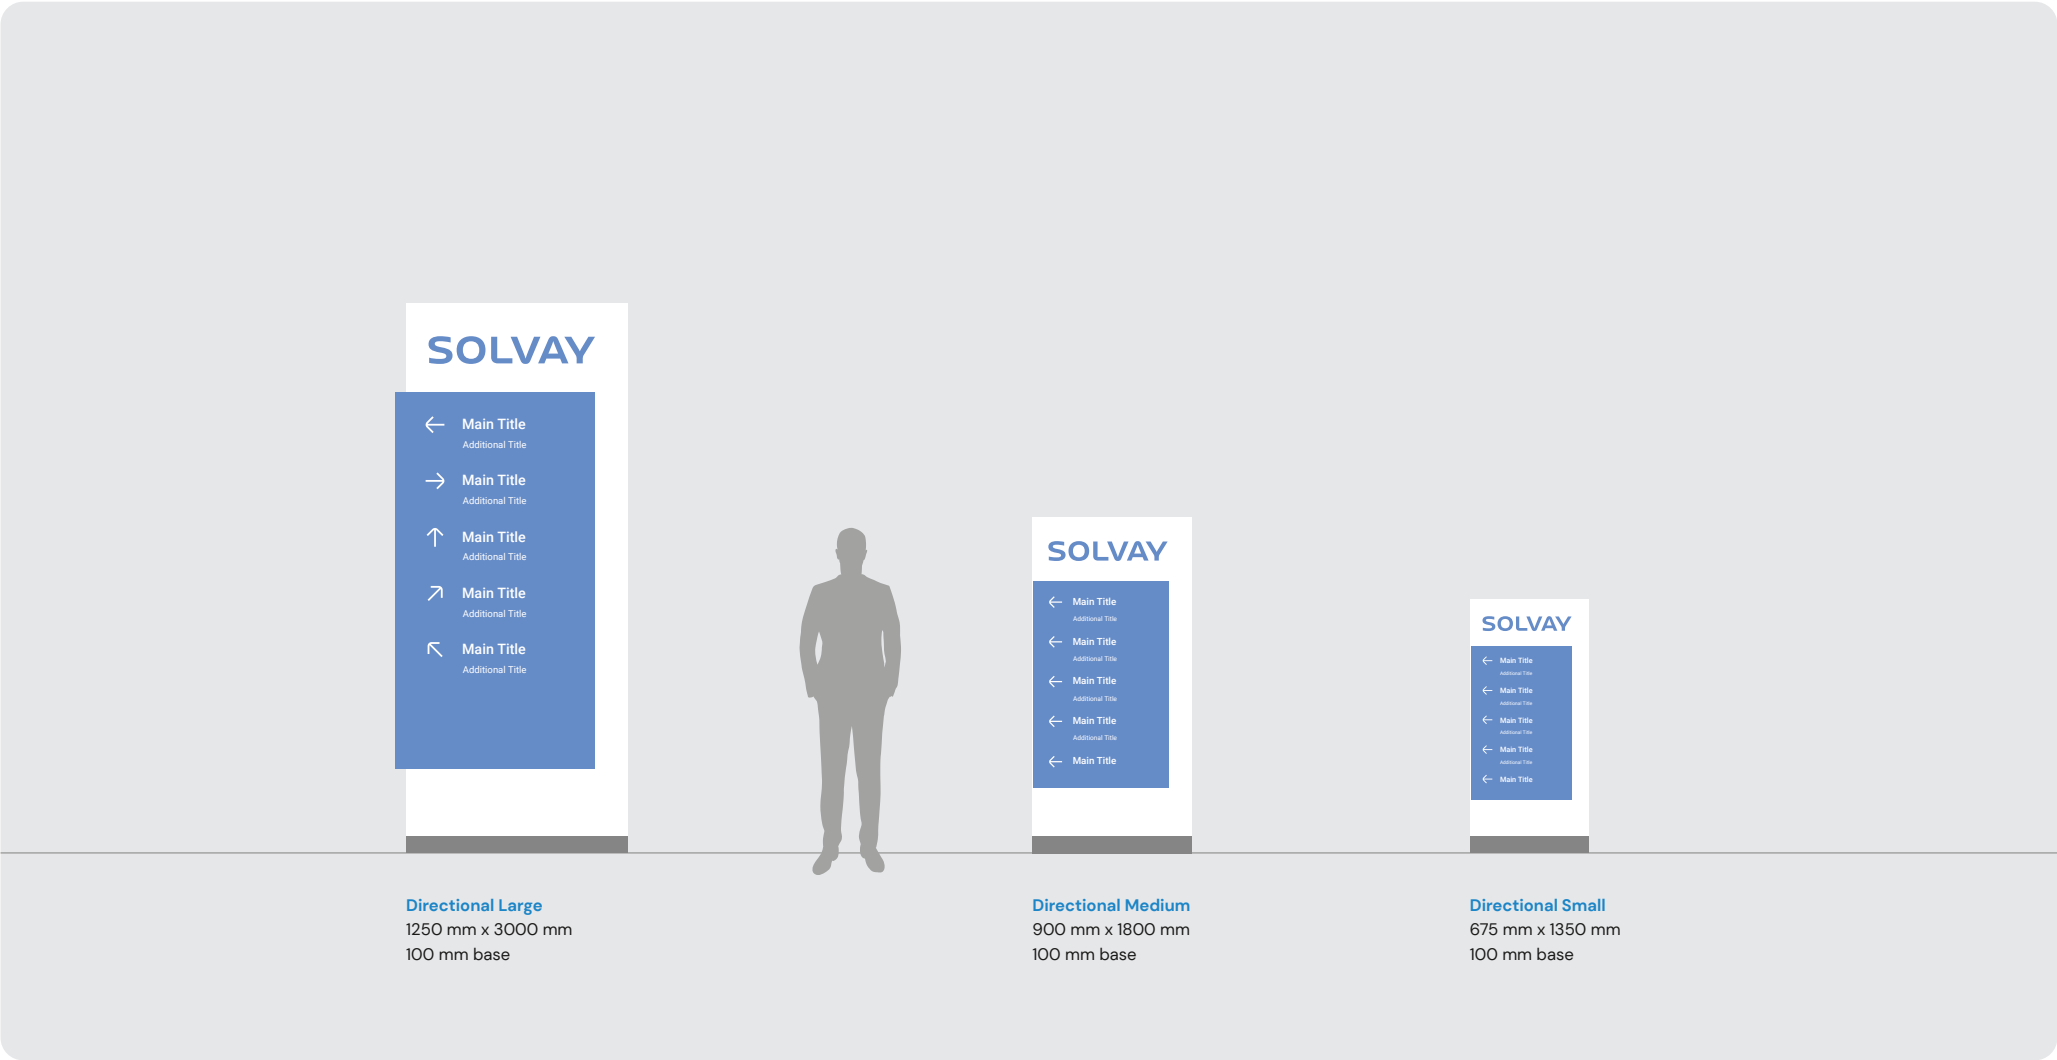


Overview external elements - Wayfinding

Sign family Solvay ECo



Wayfinding twin panel Large

P – 1000 mm x 1600 mm
L – 1600 mm x 1000 mm




Wayfinding twin panel Medium

P – 625 mm x 1000 mm
L – 1000 mm x 625 mm




Wayfinding Panel Small

P – 400 mm x 640 mm
L – 640 mm x 400 mm



Entrance Sign

1000 mm x 625 mm
640 mm x 400 mm



Parking signs Wall Mounted


400 mm x 640 mm
640 mm x 400 mm

Parking signs Free Standing

400 mm x 640 mm
640 mm x 200 mm


Wayfinding single panel

900 mm x 1440 mm
Freestanding or wall mounted



Overview external elements - Flags and banners

Sign family Solvay ECo

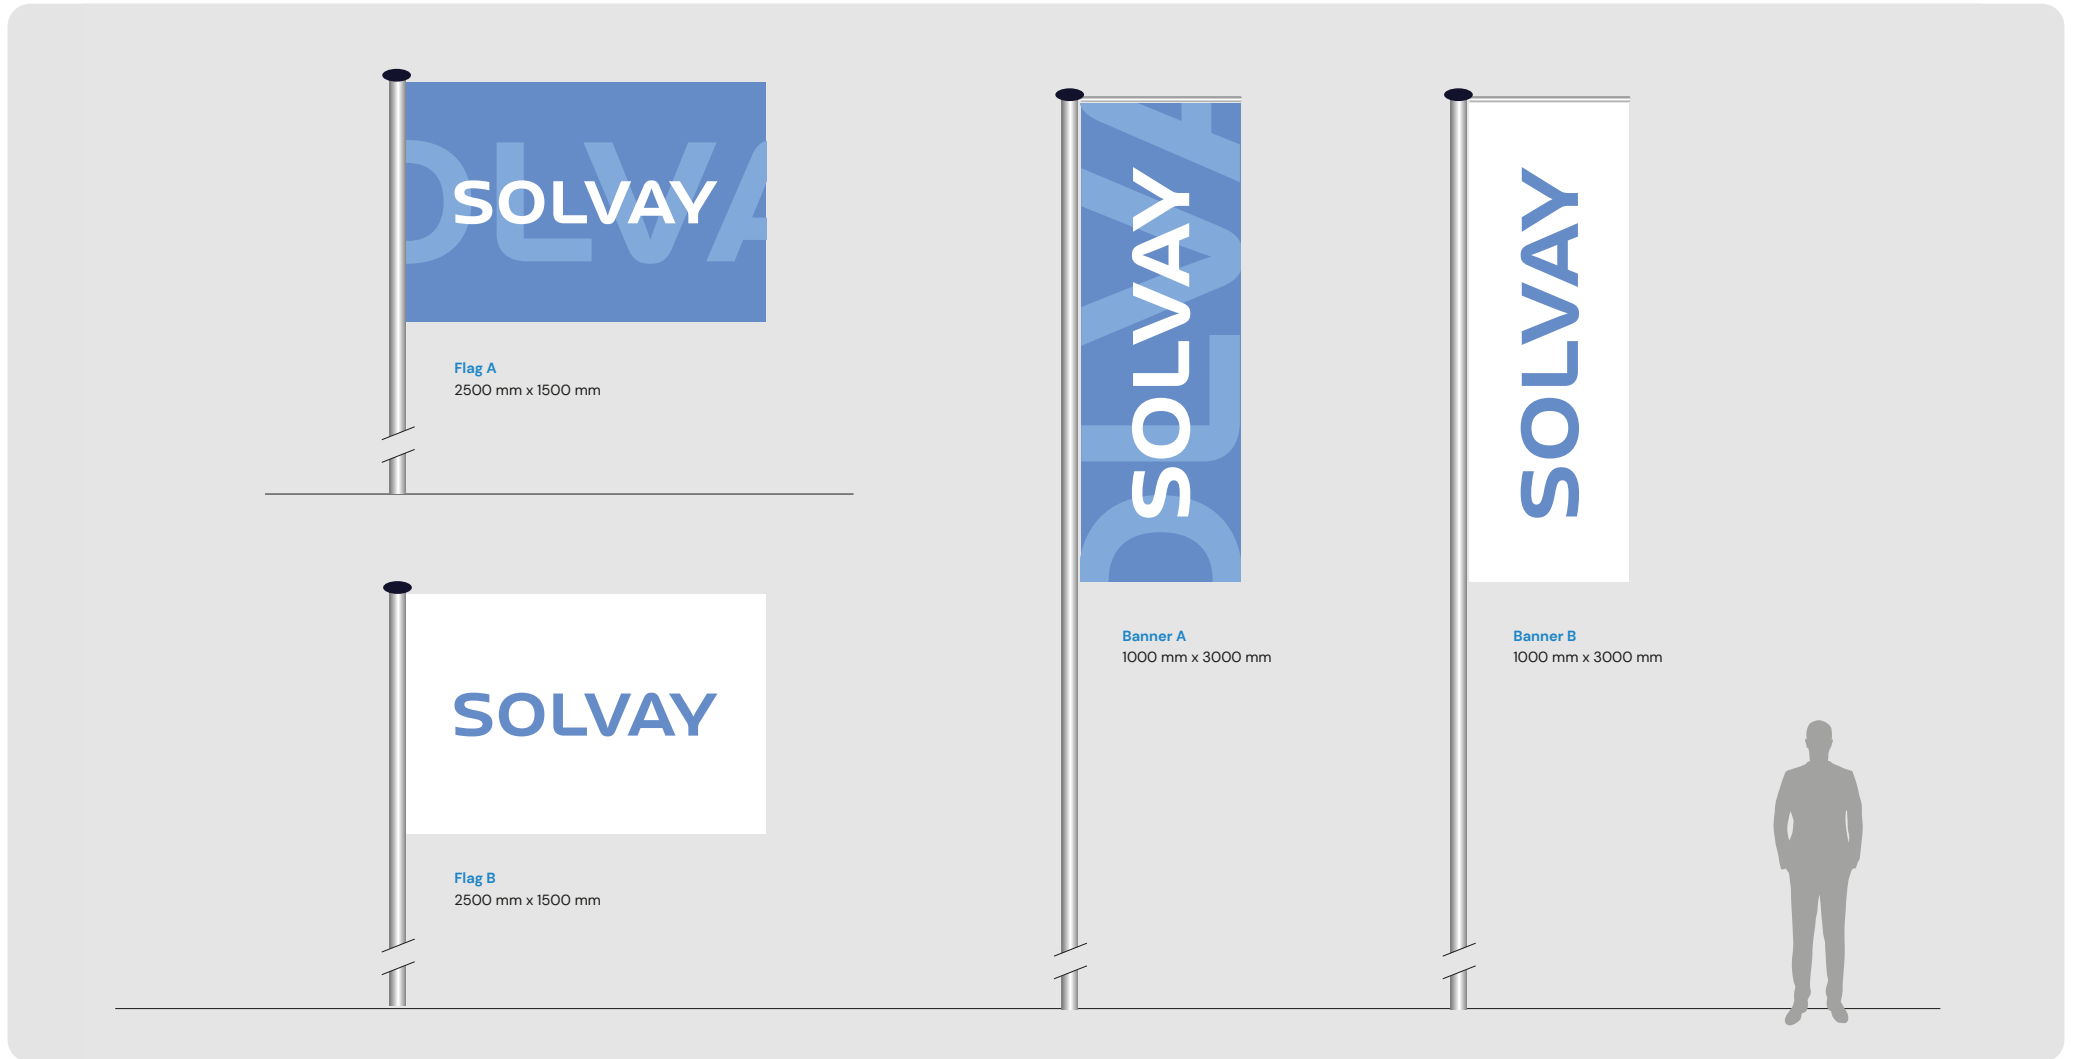

Overview internal elements - Wayfinding

Sign family Solvay ECo

Wayfinding twin panel glass Medium

P – 625 mm x 1000 mm

L – 1000 mm x 625 mm

← Main Title

Additional Title

→ Main Title

Additional Title

↑ Main Title

Additional Title

↗ Main Title

Additional Title

↖ Main Title

Additional Title

→ Main Title

Additional Title

Main Title

Additional Title

Main Title

Additional Title

Main Title

Additional Title

Main Title

Additional Title

← Main Title

Additional Title

→ Main Title

Additional Title

↑ Main Title

Additional Title

Main Title

Additional Title

→ Main Title

Additional Title

Wayfinding twin panel glass Small

P – 400 mm x 640 mm

L – 640 mm x 400 mm

← Main Title

Additional Title

→ Main Title

Additional Title

↑ Main Title

Additional Title

↗ Main Title

Additional Title

↖ Main Title

Additional Title

→ Main Title

Additional Title

Main Title

Additional Title

Main Title

Additional Title

Main Title

Additional Title

Main Title

Additional Title

← Main Title

Additional Title

→ Main Title

Additional Title

↑ Main Title

Additional Title

Main Title

Additional Title

→ Main Title

Additional Title

Factory sign

1200 mm x 400 mm

Main Title

Additional Title

SOLVAY

Main Title

Additional Title

Floor sign

400 mm x 960 mm

5

4

3

2

1

0

Panel 1

Panel 2

Panel 3

Panel 4

Panel 5

Panel 6

Reception sign panel

1200 mm x 400 mm

SOLVAY

SOLVAY

Wayfinding simple white Medium

P – 625 mm x 1000 mm

L – 1000 mm x 625 mm

← Main Title

Additional Title

→ Main Title

Additional Title

↑ Main Title

Additional Title

↗ Main Title

Additional Title

↖ Main Title

Additional Title

→ Main Title

Additional Title

Main Title

Additional Title

Main Title

Additional Title

Main Title

Additional Title

Main Title

Additional Title

← Main Title

Additional Title

→ Main Title

Additional Title

↑ Main Title

Additional Title

Main Title

Additional Title

→ Main Title

Additional Title

Wayfinding simple white Small

P – 400 mm x 640 mm

L – 640 mm x 400 mm

← Main Title

Additional Title

→ Main Title

Additional Title

↑ Main Title

Additional Title

↗ Main Title

Additional Title

↖ Main Title

Additional Title

→ Main Title

Additional Title

Main Title

Additional Title

Main Title

Additional Title

Main Title

Additional Title

Main Title

Additional Title

← Main Title

Additional Title

→ Main Title

Additional Title

↑ Main Title

Additional Title

Main Title

Additional Title

→ Main Title

Additional Title

Icon panels

300 mm x 480 mm Icon + Arrow

Different variations and directions

Icon 1

Icon 2

→

→

Location

Meeting room inlay

P – 148 mm x 200 mm

L – 200mm x 148 mm

A.40.7

A.40


Meeting room

Meeting room

14/159

Overview internal elements

Sign family Solvay ECo

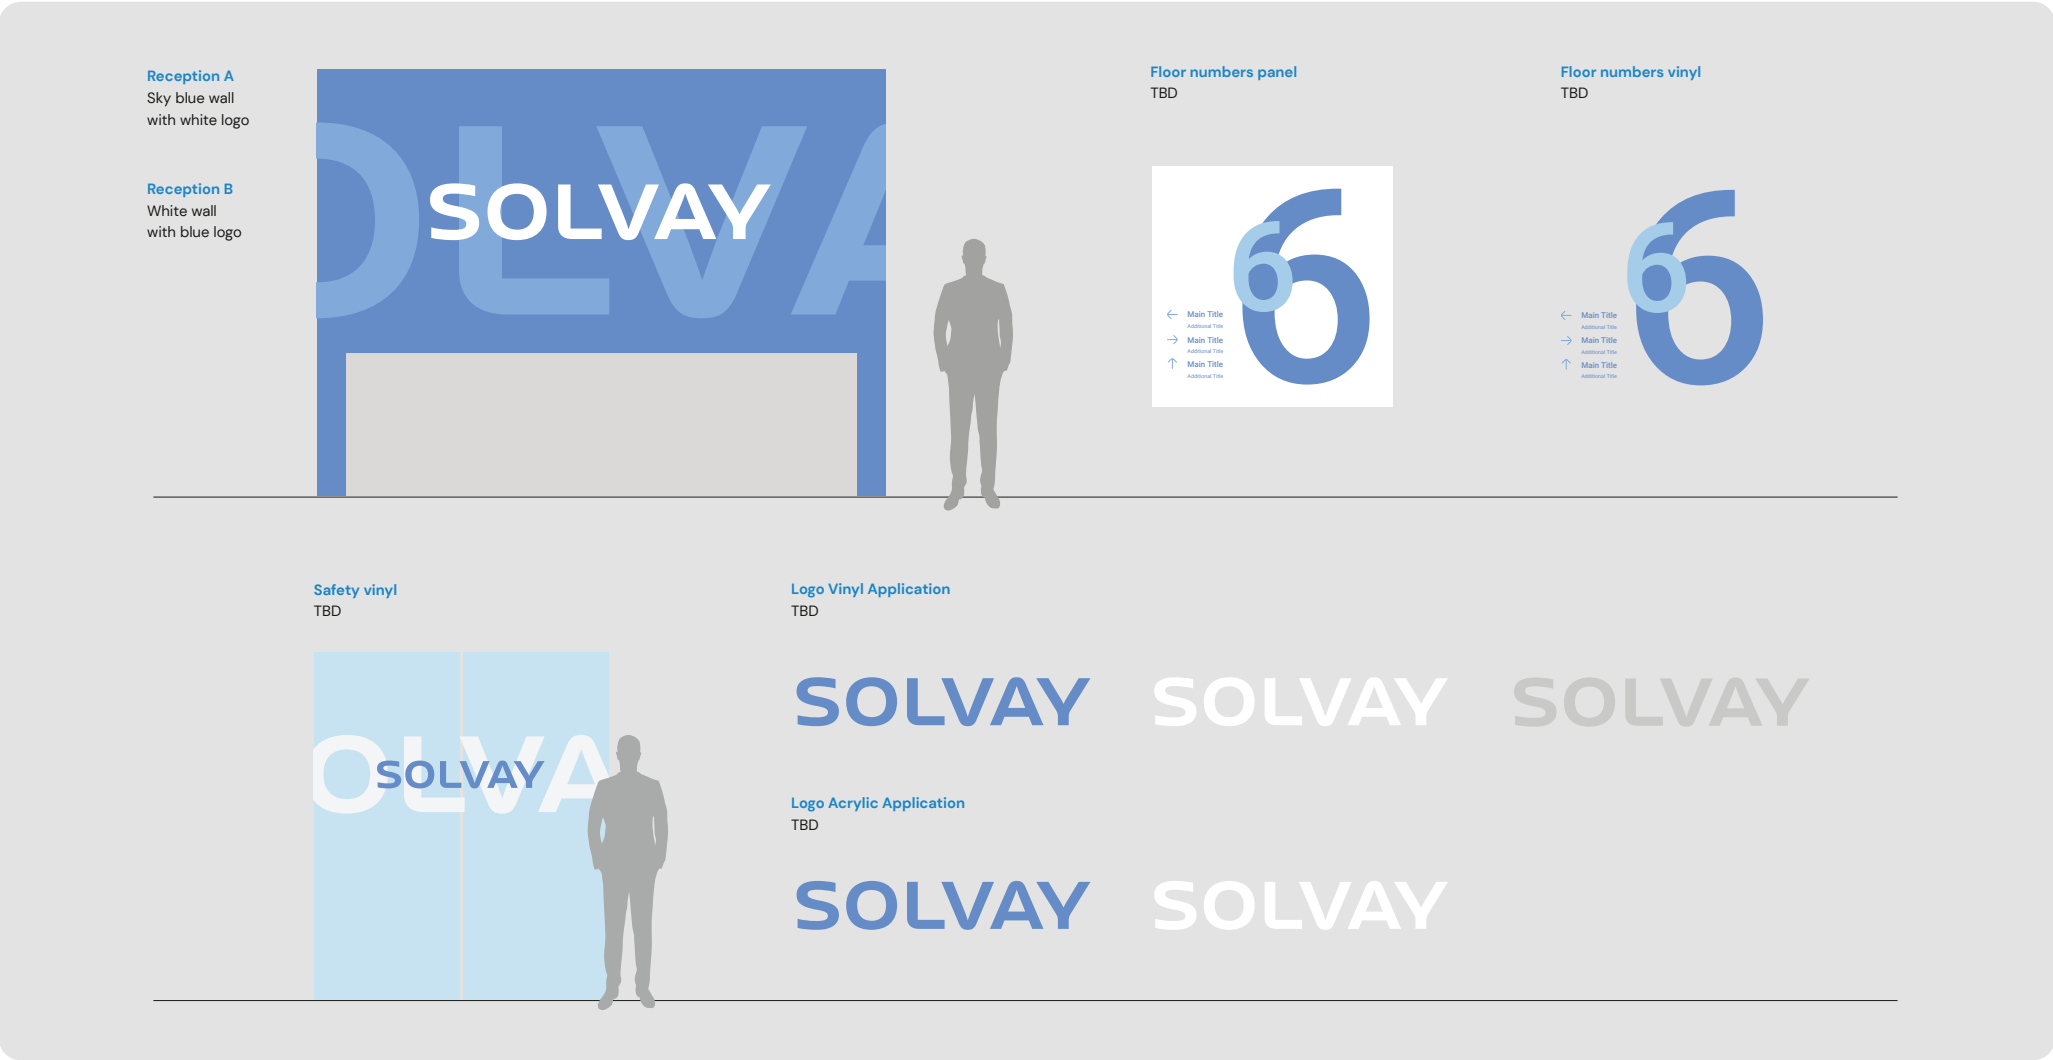

Solvay ECo

High-level signage



Box Letters Horizontal Blue - Illuminated

Sign family Solvay ECo

SOLVAY

Box Letters Wall Horizontal Blue - Illuminated

Sign family Solvay ECo

Day

SOLVAY


Night

SOLVAY

3D



3D

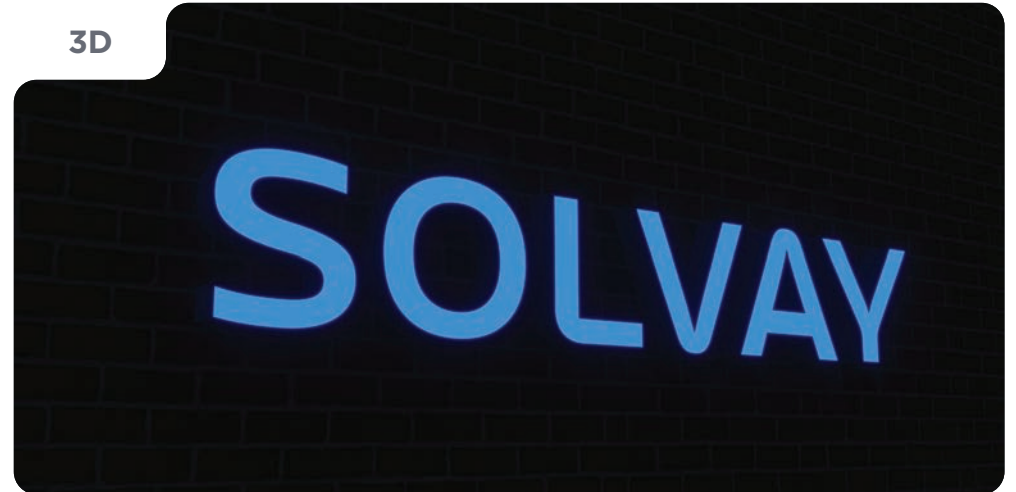

Box Letters Roof Horizontal Blue - Illuminated

Sign family Solvay ECo

Day

SOLVAY


Night

SOLVAY

3D



3D

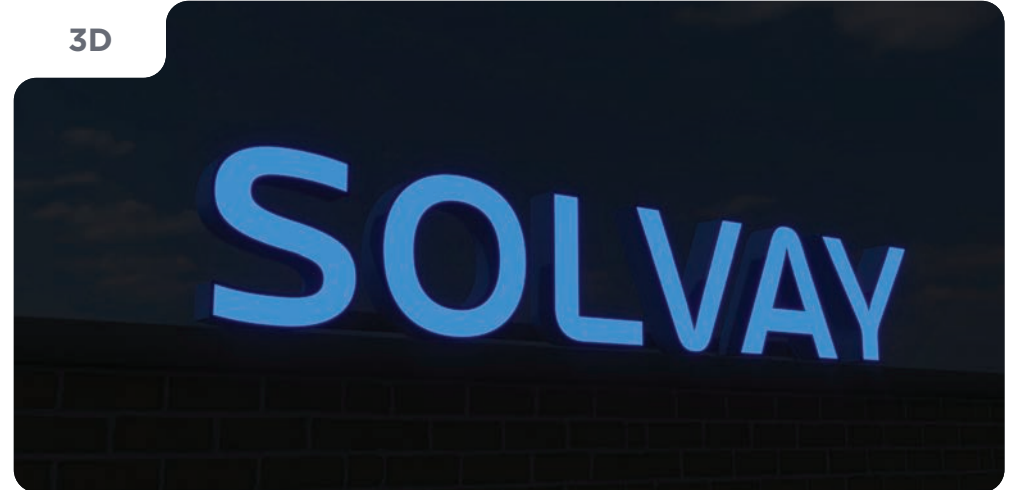

Box Letters Horizontal Blue - Illuminated

Application guidelines

Purpose

Long-range site marking.

Application

The optimal place and size of 3D logos depend on the architectural specifics of a building. For visibility, an illuminated logo should preferably be placed near the top of the façade.

Guidelines

Always propose “Box Letters Horizontal Blue Illuminated” as standard.



SOLVAY

Box Letters Horizontal Blue - Illuminated

Materialisation

Mounting / Installation

Installation against the facade (either directly mounted or using a subframe) or on the roof of the building with a subframe.

Illumination and connection

Balt-LED (Challenger-0) White 6500K or equivalent specifications. The connection box(es) are preferably installed inside the building or on the back of the frame behind the letters (not visible at the front side).

Minimum requirements:

Light output of 20 cd/m² + or - 10% 5-year warranty L80 for 70.000 hours IP67

Protection Zone

The bounding box around the element should have a minimum size of "L" from the logo.

The minimum of "Box Letters Horizontal Blue Illuminated" height is 250 mm.


Production / Materials

Letters are produced from aluminium (EN AW-1050 A H14H24 or equivalent) sheet material, minimum thickness for S=600 -> 1 mm (.040"), S>1000 -> 1,5 mm (.063"), S>2000 -> 2 mm (.080"). Sides are spot-welded to the base plate. The front is a translucent white Opal 028 Perspex, 4 mm (3/16") (for the profile 4 letters) and 3mm 1/8" (for the profile 5) with a vinyl application (Avery 5652 LD Shocking Blue). The letter is produced as a profile 4 (S > 1000 mm (39 3/8") aluminium connection profile and 4 mm (3/16") acrylic) or profile 5 (S < 1000 mm (39 1/8") elkamet connection profile and 3 mm (1/8") acrylic.)


The inside of the letters should be white, the outside spray-painted in NCS S 1560 R90B.

Internal illumination by using LED modules. Illumination should be evenly distributed over the fond. Any subframe should be spray-painted to match the local circumstances. All constructions of subframes shouldn't be visible (as little as possible). The total layer thickness of all paint should be at

Profile 4



Profile 5



Box Letters Horizontal Blue - Illuminated

Size Chart

Item	Catalogue no.	Height	Width	Depth
Box Letters Horizontal Blue Illuminated 250	SOL-BL-HB-I-250	250 mm	1500 mm	120 mm
Box Letters Horizontal Blue Illuminated 500	SOL-BL-HB-I-500	500 mm	3000 mm	120 mm
Box Letters Horizontal Blue Illuminated 750	SOL-BL-HB-I-750	750 mm	4500 mm	120 mm
Box Letters Horizontal Blue Illuminated 1000	SOL-BL-HB-I-1000	1000 mm	6000 mm	120 mm
Box Letters Horizontal Blue Illuminated 1500	SOL-BL-HB-I-1500	1500 mm	9000 mm	120 mm
Box Letters Horizontal Blue Illuminated special	SOL-BL-HB-I-SPEC	TBD	TBD	TBD

Box Letters Horizontal Blue - Non-Illuminated

Sign family Solvay ECo

The word "SOLVAY" is displayed in a bold, blue, sans-serif typeface. Each letter is contained within a rectangular box, which is part of a larger sign family. The letters are arranged horizontally and are centered within the frame.

SOLVAY

Box Letters Wall Horizontal Blue - Non-Illuminated

Sign family Solvay ECo

Day

SOLVAY

Night

SOLVAY

3D



3D



Box Letters Roof Horizontal Blue - Non-Illuminated

Sign family Solvay ECo

Day

SOLVAY

Night

SOLVAY

3D



3D



Box Letters Horizontal Blue - Non-Illuminated

Application guidelines

Purpose

Long-range site marking.

Application

The optimal place and size of 3D logos depend on the architectural specifics of a building. For visibility, an illuminated logo should preferably be placed near the top of the façade or on the roof of the building.

Guidelines

Always propose “Box Letters Horizontal Blue - Illuminated” as standard. “Box Letters Horizontal Blue - Non-Illuminated” can be used if the budget is insufficient, if no permit is issued for the illuminated version or if it will be hung in a place that is not prominently visible.



SOLVAY

Box Letters Horizontal Blue - Non-Illuminated

Materialisation

Mounting / Installation

Installation against the facade (either directly mounted or using a subframe) or on the roof of the building with a subframe.

Protection Zone

The bounding box around the element should have a minimum size of “L” from the logo.

The minimum “Box Letters Horizontal Blue Illuminated” height is 250 mm.

Production / Materials

Letters are produced from aluminium (EN AW-1050 A H14H24 or equivalent) sheet material, minimum thickness for S=250 -> 1 mm (.040”), S>1000 -> 1,5 mm (.063”), Q>2000 -> 2 mm (.080”). Sides are spot-welded to the base plate.

The outside of the sides and front of the letters should be spray-painted NCS S 1560 R90B. Any subframe should be spray-painted to match the local circumstances. All constructions of subframes shouldn't be visible (as little as possible).

The total layer thickness of all paint should be at least 80 micrometres. The internal aluminium letter is used for installation.

Profile 1



Box Letters Horizontal Blue - Non-Illuminated

Size Chart

Item	Catalogue no.	Height	Width	Depth
Box Letters Horizontal Blue Non-Illuminated 250	SOL-BL-HB-NI-250	250 mm	1500 mm	120 mm
Box Letters Horizontal Blue Non-Illuminated 500	SOL-BL-HB-NI-500	500 mm	3000 mm	120 mm
Box Letters Horizontal Blue Non-Illuminated 750	SOL-BL-HB-NI-750	750 mm	4500 mm	120 mm
Box Letters Horizontal Blue Non-Illuminated 1000	SOL-BL-HB-NI-1000	1000 mm	6000 mm	120 mm
Box Letters Horizontal Blue Non-Illuminated 1500	SOL-BL-HB-NI-1500	1500 mm	9000 mm	120 mm
Box Letters Horizontal Blue Non-Illuminated special	SOL-BL-HB-NI-SPEC	TBD	TBD	TBD

Box Letters Wall Horizontal White - Illuminated

Sign family Solvay ECo



SOLVAY

Box Letters Wall Horizontal White - Illuminated

Sign family Solvay ECo

Day

SOLVAY

Night

SOLVAY

3D



3D



Box Letters Wall Horizontal White - Illuminated

Application guidelines

Purpose

Long-range site marking.

Application

The optimal place and size of 3D logos depend on the architectural specifics of a building. For maximum long-range visibility, the logo should be placed near the top of the facade. Placement on the roof is not an option for readability reasons.

Guidelines

Always propose “Box Letters Horizontal Blue - Illuminated” as standard. “Box Letters Wall Horizontal White - Illuminated” is only applied if the roof is not suitable for the placement of box letters, if the wall does not provide enough contrast for the readability of the logo, or external issues such as budget or local permits.



SOLVAY

Box Letters Wall Horizontal White - Illuminated

Materialisation

Mounting / Installation

Installation against the facade (either directly mounted or using a subframe).

Illumination and connection

Balt-LED (Challenger-0) White 6500K or equivalent specifications. The connection box(es) are preferably installed inside the building or on the back of the frame behind the letters (not visible at the front side).

Minimum requirements:

Light output of 150 cd/m² + or - 10% 5-year warranty
L80 for 70.000 hours IP67

Protection Zone

The bounding box around the element should have a minimum size of "L" from the logo.


The minimum "Boxletters Wall Horizontal White - Illuminated" height is 250 mm.

Production / Materials


Letters are produced from aluminium (EN AW-1050 A H14H24 or equivalent) sheet material, minimum thickness for S=600 -> 1 mm (.040"), S>1000 -> 1,5 mm (.063"), S>2000 -> 2 mm (.080"). Sides are spot-welded to the base plate. The front is a translucent white Opal 028 Perspex, 4 mm (3/16") (for the profile 4 letters) and 3mm 1/8" (for the profile 5).

The letter is produced as a profile 4 (S > 1000 mm (39 3/8") aluminium connection profile and 4 mm (3/16") acrylic) or profile 5 (S < 1000 mm (39 1/8") elkamet connection profile and 3 mm (1/8") acrylic.) The outside and inside of the letters should be white. Internal illumination using LED modules. Illumination should be evenly distributed over the fond. Any subframe should be spray-painted to match the local circumstances. All constructions of subframes shouldn't be visible (as little as possible). The total layer thickness of all paint should be at least 80 micrometres.

Profile 4



Profile 5



Box Letters Wall Horizontal White - Illuminated

Size Chart

Item	Catalogue no.	Height	Width	Depth
Box Letters Horizontal White Illuminated 250	SOL-BL-HW-I-250	250 mm	1500 mm	120 mm
Box Letters Horizontal White Illuminated 500	SOL-BL-HW-I-500	500 mm	3000 mm	120 mm
Box Letters Horizontal White Illuminated 750	SOL-BL-HW-I-750	750 mm	4500 mm	120 mm
Box Letters Horizontal White Illuminated 1000	SOL-BL-HW-I-1000	1000 mm	6000 mm	120 mm
Box Letters Horizontal White Illuminated 1500	SOL-BL-HW-I-1500	1500 mm	9000 mm	120 mm
Box Letters Horizontal White Illuminated special	SOL-BL-HW-I-SPEC	TBD	TBD	TBD

Box Letters Wall Horizontal White - Non-Illuminated

Sign family Solvay ECo



SOLVAY

Box Letters Wall Horizontal White - Non-Illuminated

Sign family Solvay ECo

Day

SOLVAY

Night

SOLVAY

3D



3D



Box Letters Wall Horizontal White - Non-Illuminated

Application guidelines

Purpose

Long-range site marking.

Application

The optimal place and size of 3D logos depend on the architectural specifics of a building. For visibility, an illuminated logo should preferably be placed near the top of the façade. Placement on the roof is not an option for readability reasons.

Guidelines

Always propose “Box Letters Horizontal Blue - Illuminated” as standard. “Box Letters Wall Horizontal White - Non-Illuminated” is only applied if the roof is not suitable for the placement of box letters, if the wall does not provide enough contrast for the readability of the logo, or external issues such as budget or local permits.



SOLVAY

Box Letters Wall Horizontal White - Non-Illuminated

Materialisation

Mounting / Installation

Installation against the facade (either directly mounted or using a subframe).

Illumination and connection

BaltLED (S+ range) White 6500K or equivalent specifications. The connection box(es) are preferably installed inside the building or on the back of the frame behind the letters (not visible at the front side).

Protection Zone

The bounding box around the element should have a minimum size "L" from the logo.

The minimum of "Boxletters wall horizontal Blue - Illuminated" height is 250 mm.

Production / Materials

Letters are produced from aluminium (EN AW-1050 A H14H24 or equivalent) sheet material, minimum thickness for S=250 -> 1 mm (.040"), S>1000 -> 1,5 mm (.063"), Q>2000 -> 2 mm (.080").

Sides are spot-welded to the base plate. The outside of the sides and front of the letters should be spray-painted white. Any subframe should be spray-painted to match the local circumstances.

All constructions of subframes shouldn't be visible (as little as possible). The total layer thickness of all paint should be at least 80 micrometres. The internal aluminium letter is used for installation.

Profile 1



Box Letters Wall Horizontal White - Non-Illuminated

Size Chart

Item	Catalogue no.	Height	Width	Depth
BoxLetters Horizontal White Non-Illuminated 250	SOL-BL-HW-NI-250	250 mm	1500 mm	120 mm
BoxLetters Horizontal White Non-Illuminated 500	SOL-BL-HW-NI-500	500 mm	3000 mm	120 mm
BoxLetters Horizontal White Non-Illuminated 750	SOL-BL-HW-NI-750	750 mm	4500 mm	120 mm
BoxLetters Horizontal White Non-Illuminated 1000	SOL-BL-HW-NI-1000	1000 mm	6000 mm	120 mm
BoxLetters Horizontal White Non-Illuminated 1500	SOL-BL-HW-NI-1500	1500 mm	9000 mm	120 mm
BoxLetters Horizontal White Non-Illuminated special	SOL-BL-HW-NI-SPEC	TBD	TBD	TBD

Solvay ECo

External signage



Monument - Illuminated

Visualisation

Day



Night



Monument - Illuminated

Application guidelines

Purpose

Long-range site marking

Application


The illuminated monument must be able to be seen from a great distance. After seeing the wall or roof signs, the Illuminated Monument indicates that the visitor is on the correct route.

Surroundings

Lines of sight from the public space should not be interrupted by objects. Shrubs, bushes, or other objects should be removed or structurally pruned.

Visual characteristic aspects

The monument is made of a Sky Blue front and back shell with a Medium Blue watermark on top. The illuminated logo is made of 15 mm pushed through white acrylic. On the sides, a strip of 100mm Soft Blue vinyl application is applied in the middle to simulate layering.

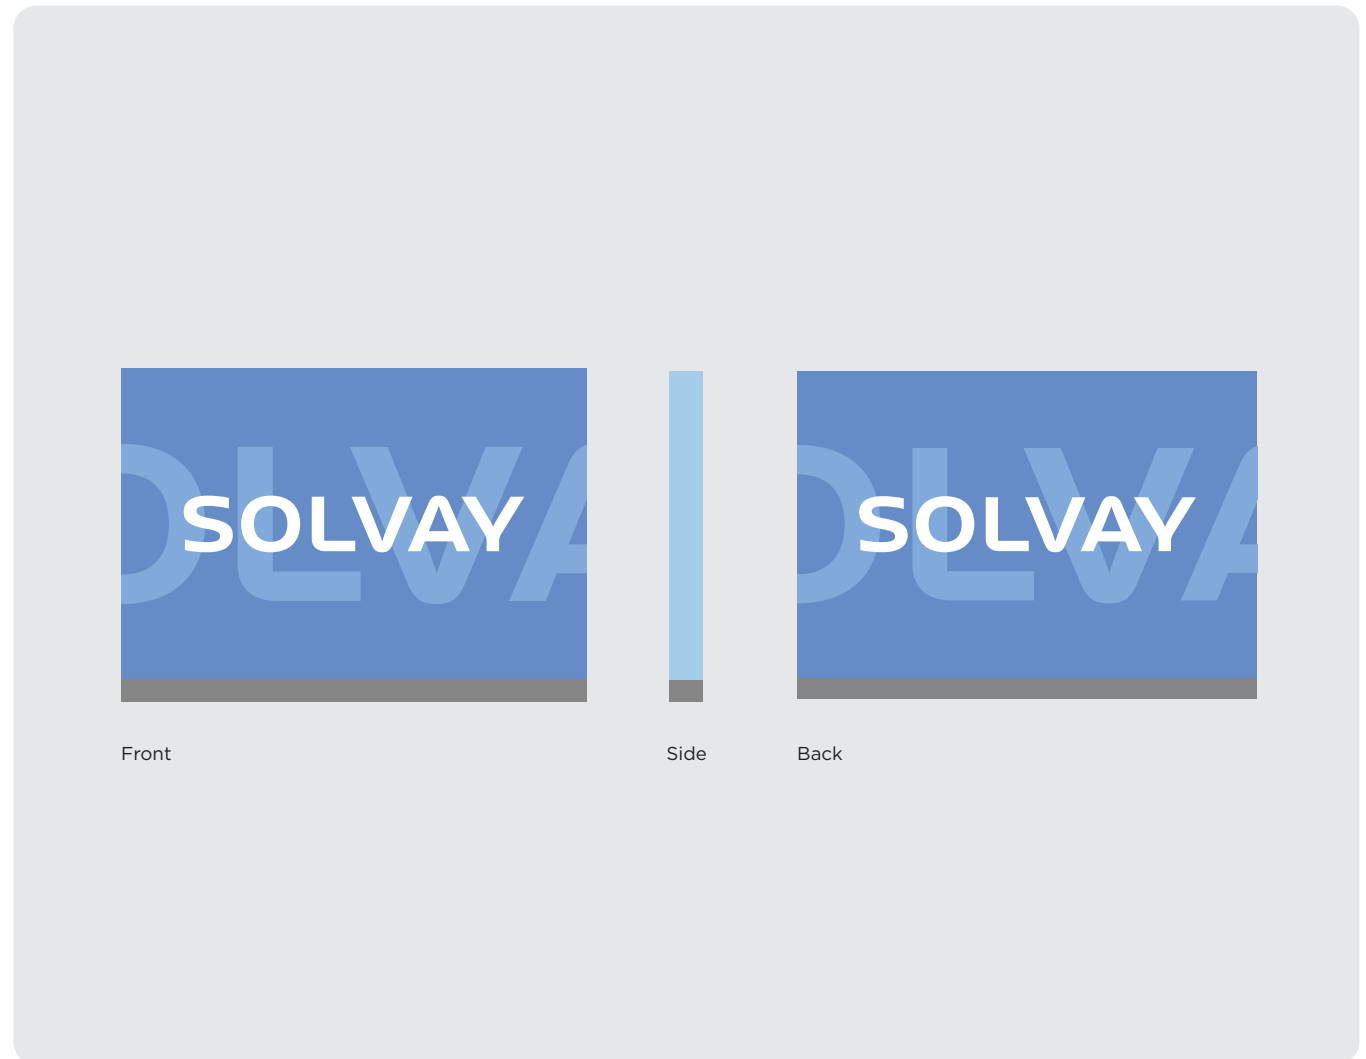

Monument - Illuminated

Materialisation

Mounting / Installation

Freestanding on concrete foundation.

Production / Materials

The internal aluminium construction has two separate foot plates fixed on a concrete foundation.

The main shape of the column consists of folded 5mm thick ACM panels. The logo is lasered out of the front and back. The 19mm-thick crystal-clear acrylic letters are glued to a 3mm Opal 028 acrylic plate and protrude through the recesses outside the column. A translucent white film should be applied to the front of the letters to create a clear halo around the white luminous letters.

The front and back panel are mounted on the aluminium frame by means of a blind suspension system, and secured at the top with stainless steel screws.

Illumination and connection


Balt-LED (Challenger-O) White 6500K or equivalent specifications. The connection box(es) are preferably installed inside the building or on the back of the frame behind the letters (not visible at the front side).

Minimum requirements:

Light output of 150 cd/m² + or - 10% 5-year warranty L80 for 70.000 hours IP67


The panels should be spray-painted (NCS: S 1560-R90B) The colour Medium Blue of the vertical Solvay logo should be spray-painted (NCS: S 1550-R80B) or with vinyl application (MACal 9839-10 Sky Blue). The Soft Blue colour on the sides are made of vinyl application (Macal 9839-43 Iceberg) is made of vinyl (Macal 9839-42 Pastel Blue) or spray-painted (NCS S 1550 - R80B).

If there is a requirement for a Non-Illuminated Monument, no LED modules is needed. The rest of the monument will be the same.

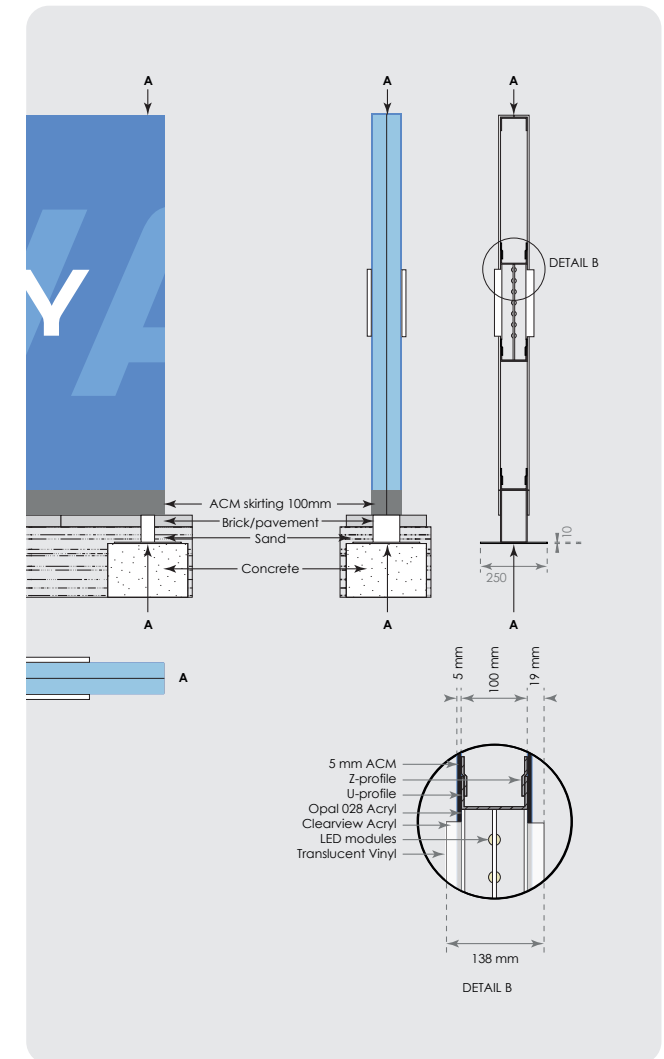

Monument - Illuminated

Materialisation

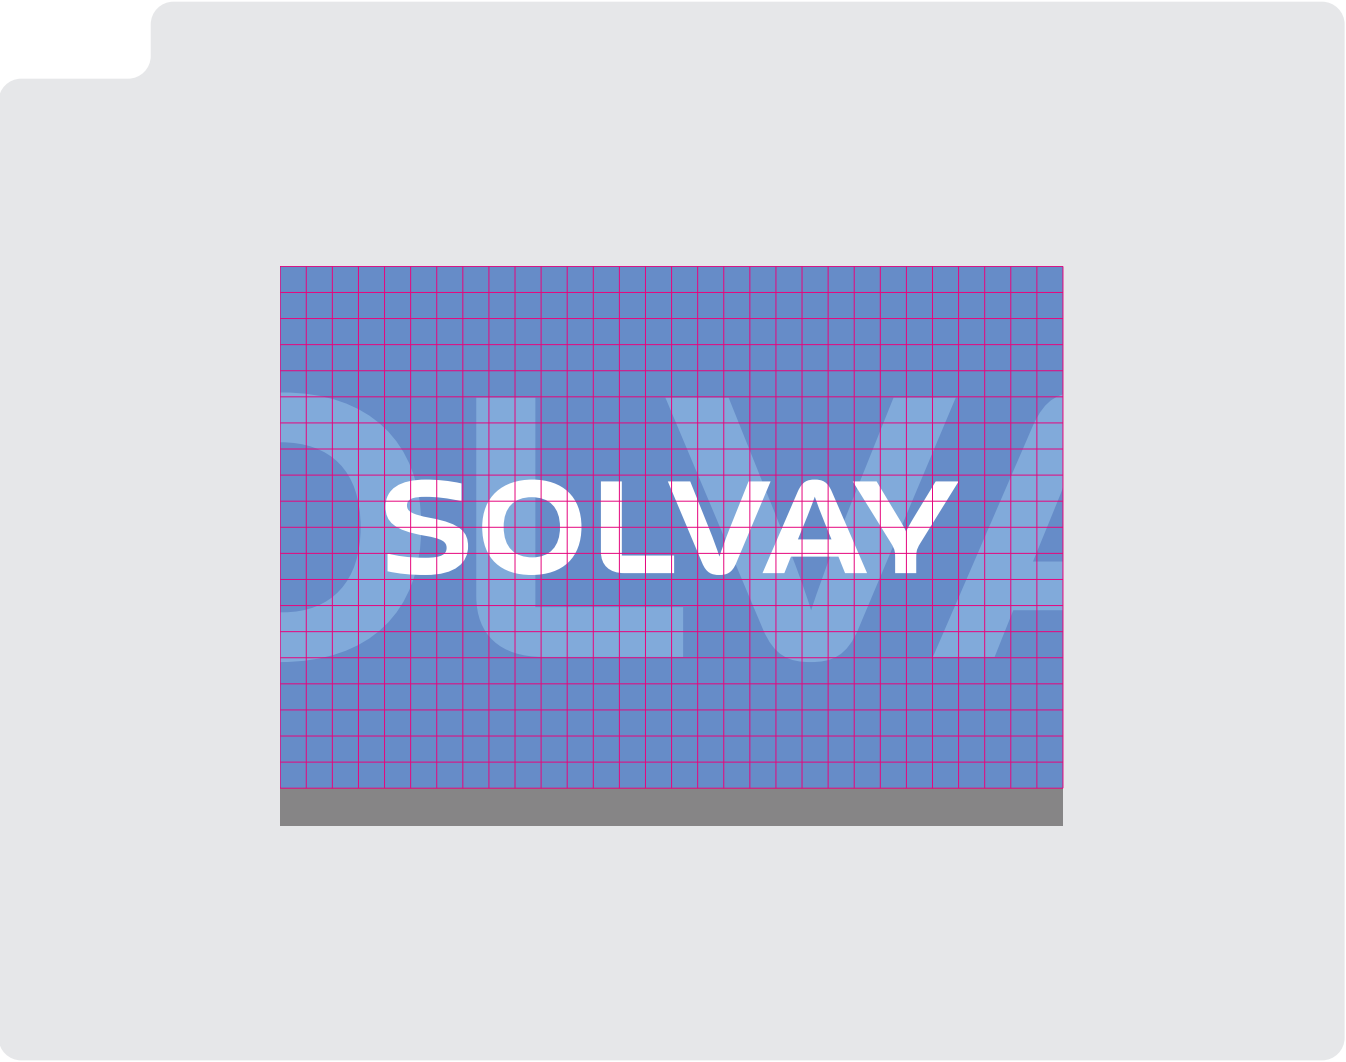

Catalogue number SOL-M-I-SS / SOL-M-I-DS

Layout specifications

Element	2100 mm x 1400 mm x 150 mm
Grid	30 x 20

Monument - Illuminated

Size chart

Item	Catalogue no.	Height	Width	Depth
Monument Illuminated Single Sided	SOL-M-I-SS	1400 mm	2100 mm	150 mm
Monument Illuminated Double Sided	SOL-M-I-DS	1400 mm	2100 mm	150 mm
Monument Illuminated Special	SOL-M-I-Spec	TBD	1,5 x Height	150 mm

Site Marker - Illuminated

Visualisation

Day



Night



Site Marker - Illuminated

Application guidelines

Purpose

Closer-range site marking.

Application

It is ideal to place the site marker in a location easily visible from the public road. The purpose of the site marker is to give visitors confirmation that they are heading in the right direction. The best place to position the marker is near the entrance, as it acts as a welcoming gesture to encourage visitors to explore the site.

Surroundings

Lines of sight from the public space should not be interrupted by objects. Shrubs, bushes, or other objects should be removed or structurally pruned.

Visual characteristic aspects

The site marker is made of a Sky Blue front and back shell with a Medium Blue watermark on top. The illuminated logo is made of 15 mm pushed through white acrylic. The white content is made with vinyl application. On the sides, a strip of 100mm Soft Blue vinyl application is applied in the middle to simulate layering.



Site Marker - Illuminated

Materialisation

Mounting / Installation

Freestanding on concrete foundation.

Production / Materials

The internal aluminium construction has two separate foot plates fixed on a concrete foundation.

The main shape of the column consists of folded 5mm thick ACM panels. The logo is lasered out of the front and back. The 19mm thick crystal clear acrylic letters are glued to a 3mm Opal 028 acrylic plate and protrude through the recesses outside the column. A translucent white film should be applied to the front of the letters to create a clear halo around the white luminous letters.

The front and back panels are mounted on the aluminium frame by means of a blind suspension system, and secured at the top with stainless steel screws.

Illumination and connection


Balt-LED (Challenger-0) White 6500K or equivalent specifications. The connection box(es) are preferably installed inside the building or on the back of the frame behind the letters (not visible at the front side).

Minimum requirements:

Light output of 150 cd/m² + or - 10% 5-year warranty L80 for 70.000 hours IP67


The panels should be spray-painted (NCS: S 1560-R90B) The colour Medium Blue of the vertical Solvay-logo should be spray-painted (NCS: S 1550-R80B) or with vinyl application (Macal 9839-42 Pastel Blue). The Soft Blue colour on the sides are made of vinyl application (Macal 9839-43 Iceberg).

If there is a requirement for a Non-Illuminated Site Marker, no LED modules are needed. The rest of the Site Marker will be the same.

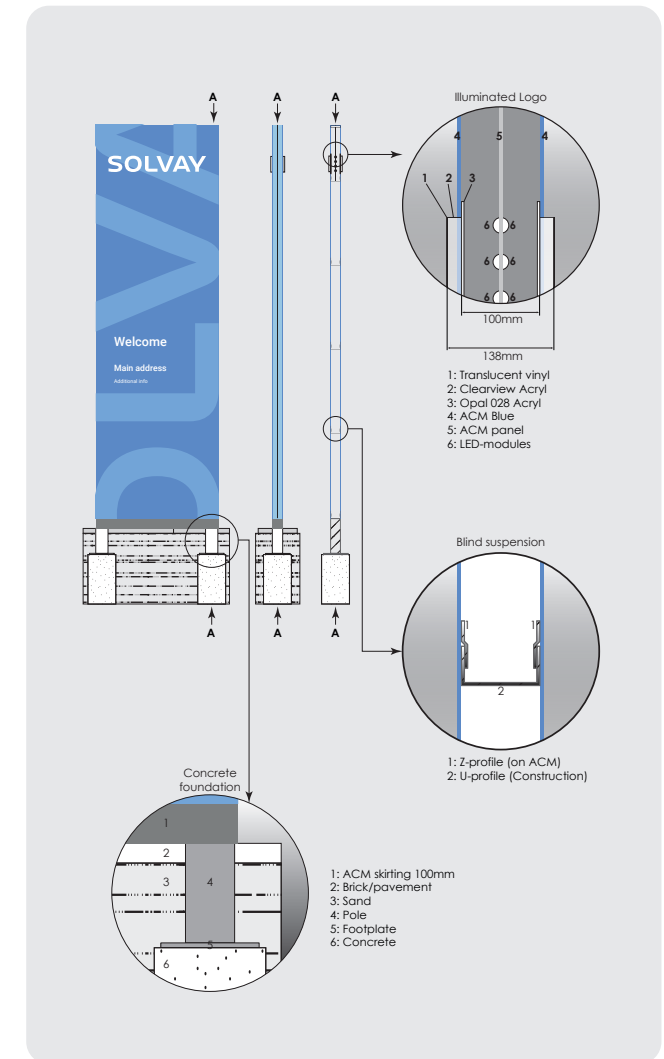

Site Marker - Illuminated

Materialisation

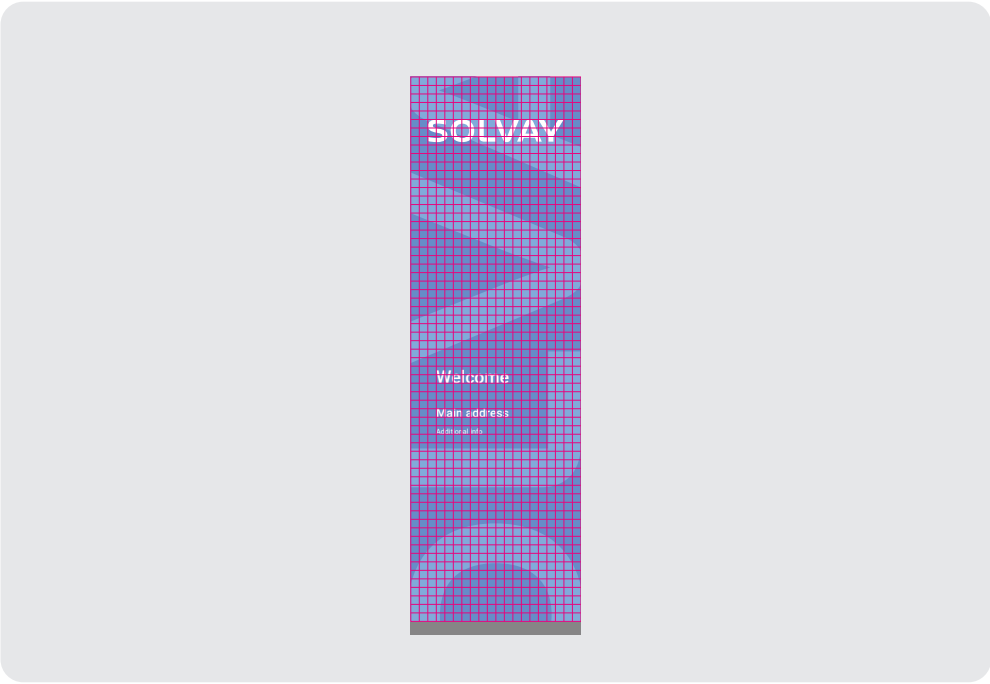

Catalogue number SOL-SM-I-4000

Layout specifications

Element	1250 mm x 4000 mm x 120 mm
Font size large	365 pt
Font size Address	250 pt
Font size small	150 pt
Grid	20 x 64



Catalogue number SOL-SM-I-3000

Layout specifications

Element	1250 mm x 3000 mm x 120 mm
Font size large	365 pt
Font size Address	250 pt
Font size small	150 pt
Grid	20 x 48

Site Marker - Illuminated

Size chart

Item	Catalogue no.	Height	Width	Depth
Site Marker Illuminated 4000	SOL-SM-I-4000	4000 mm	1250 mm	120 mm
Site Marker Illuminated 3000	SOL-SM-I-3000	3000 mm	1250 mm	120 mm

Directionals

Visualisation

Day



Night



Directionals

Application guidelines

Purpose

Close-range site marking.

Application


The ideal place for the large directional is where routing is needed for vehicles. The two smaller versions are more suitable for pedestrians. The blue side must always face the visitor.

Surroundings

The lines of sight to the content on the directionals should always be clear. Bushes and shrubs should, therefore, be structurally removed or pruned.

Visual characteristic aspects

The directional is made of a base with a white front and back shell. A Medium Blue painted thickened part sticks out here.. This blue box has a blue halo on the sides in the night situation. The illuminated logo with Sky Blue vinyl on the front is 5 mm pushed through the front and back plates. The unlit content on the blue surface is applied with a white vinyl application.

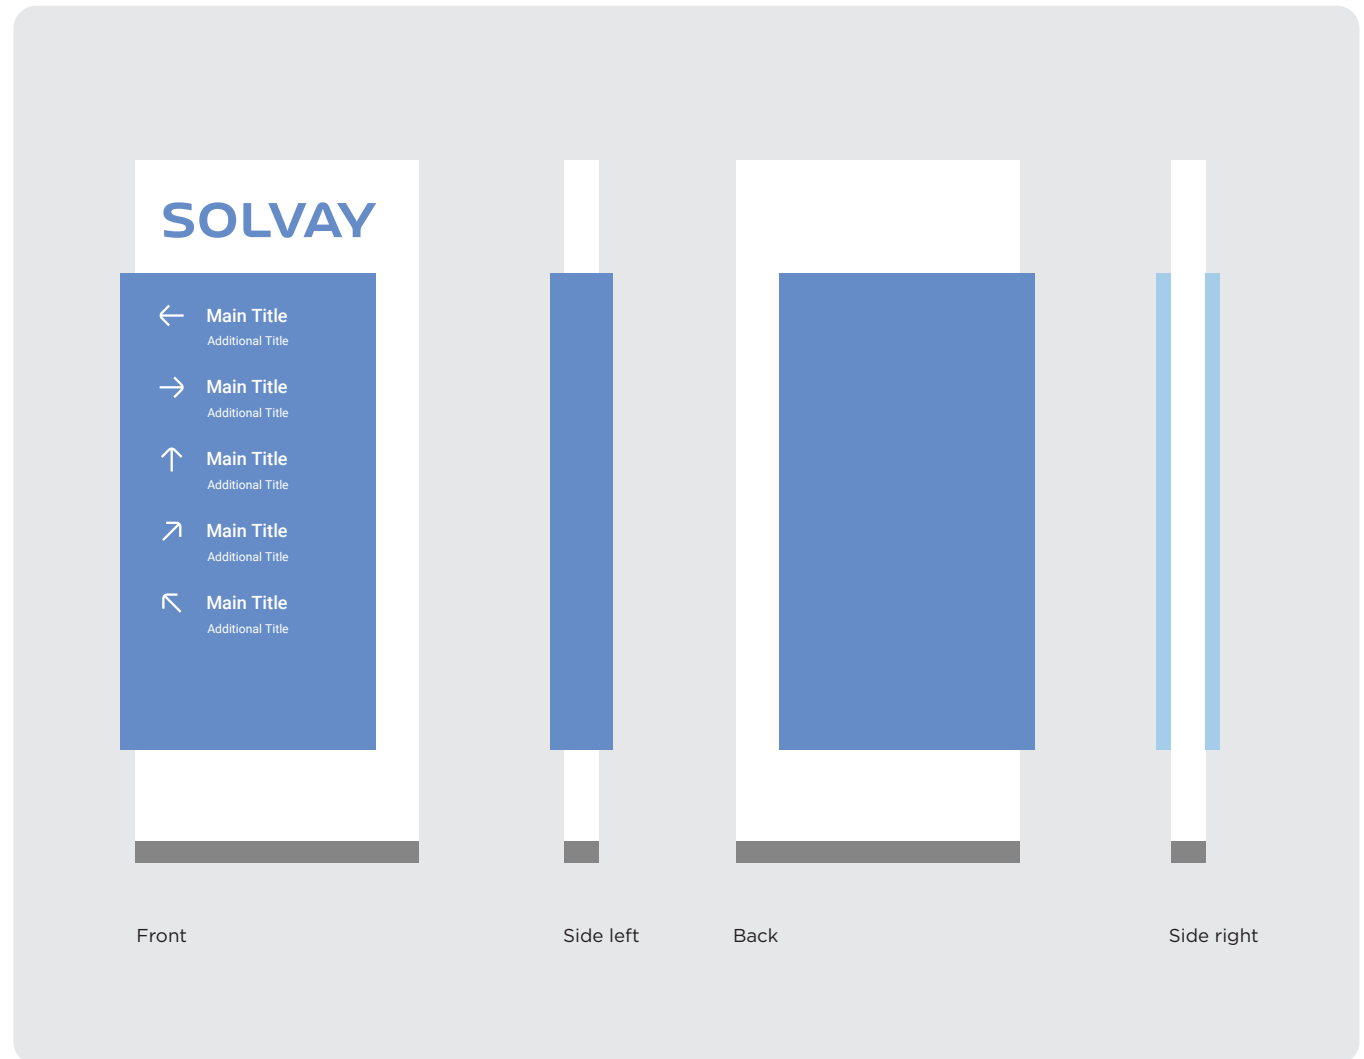

Directionals - Illuminated

Materialisation

Mounting / Installation

Freestanding on concrete foundation.

Production / Materials

The internal aluminium construction has two separate foot plates fixed on a concrete foundation.

The main shape of the column consists of folded 5mm thick White ACM panels. The logo is lasered out of the front and back. The 19mm thick crystal clear acrylic letters are glued to a 3mm Opal 028 acrylic plate and protrude through the recesses outside the column. Vinyl application (Avery 5652 LD Shocking Blue) must be applied to the front of the letters to create a clear halo around the Sky Blue luminous letters.

The “Sky Blue Box” (Spray-painted NCS: S 1560-R90B or Vinyl: MACal 9839-10 Sky Blue) with the white content (vinyl application) consists of two shell parts. On the open long side, the Soft Blue halo is created by milled 19mm Opal 028 Acrylic with a printed dusted etched foil (CMYK 42/11/0/0) with matt laminate.

Assembly of the different shell parts (white and sky blue) should be as blind as possible, using Z-profiles.

Illumination and connection

Balt-LED (Challenger-0) White 6500K or equivalent specifications. The connection box(es) are preferably installed inside the building or on the back of the frame behind the letters (not visible at the front side).


Minimum requirements:

Light output of Logo:
15 cd/m² + or - 10% 5-year warranty L80 for 70.000 hours IP67

Light output of Halo:
20 cd/m² + or - 10% 5-year warranty L80 for 70.000 hours IP67

Base plate (plinth) that covers the legs should be grey (RAL 7036). The total paint layer thickness should be at least 80 micrometres.

If there is a requirement for a Double Illuminated version, the LED modules must be used on both sides. For a non-illuminated version, the LED modules can be omitted. The construction remains the same.

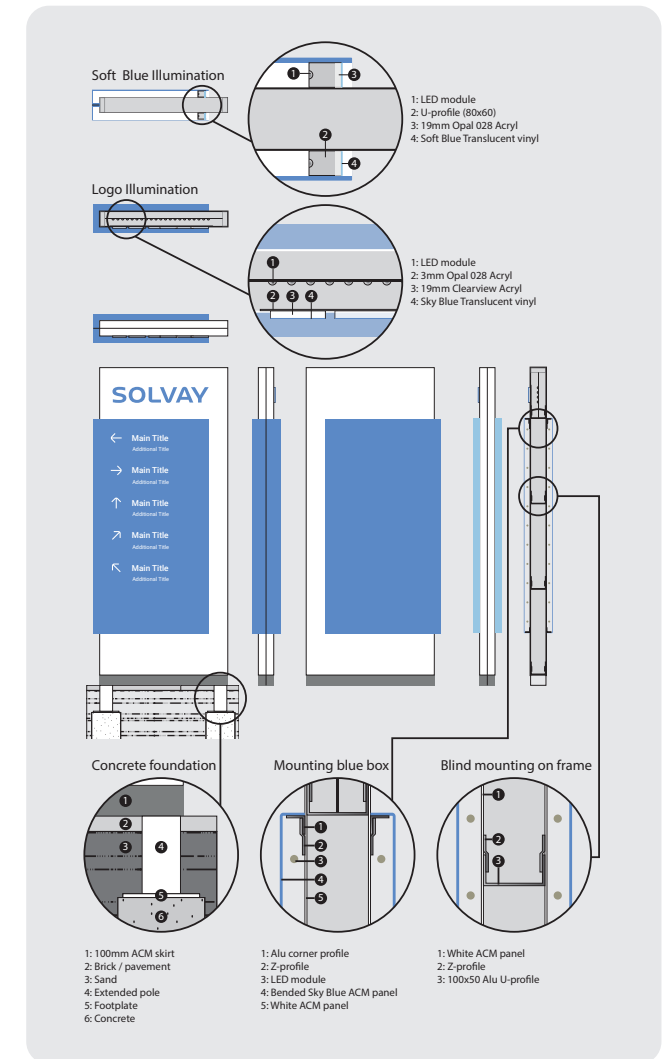

Directionals - Non-Illuminated

Materialisation


Mounting / Installation

Freestanding on concrete foundation.

Production / Materials

The white spray-painted folded panels will be installed on an aluminium or steel internal construction using secured screws. The pillar should have two separate foot plates to connect to a foundation.

The Sky Blue plane is spray-painted (NCS: S 1560-R90B) or a vinyl application (MACal 9839-10 Sky Blue). The content is white vinyl application.

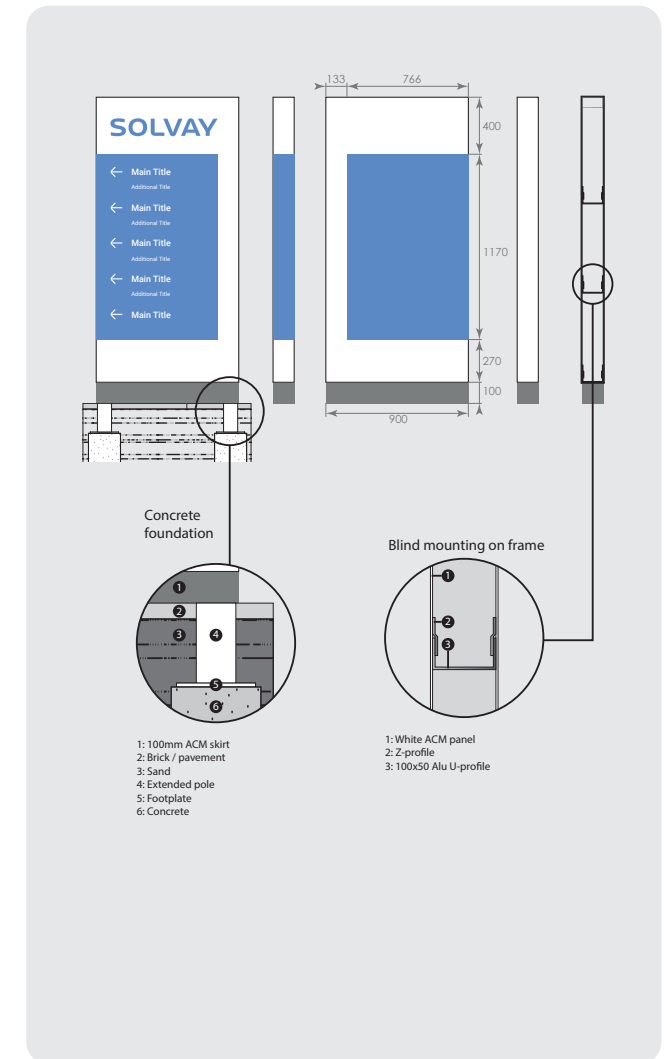

Directionals

Variants in execution



Catalogue number SOL-DIR-I-3000

Layout specifications


Element	1250 mm x 3000 mm x 150 mm
Font size large	228 pt
Font size small	152 pt
Grid	20 x 48



Catalogue number SOL-DIR-NI-1800

Layout specifications

Element	900 mm x 1800 mm x 100 mm
Font size large	157 pt
Font size small	105 pt
Grid	20 x 40

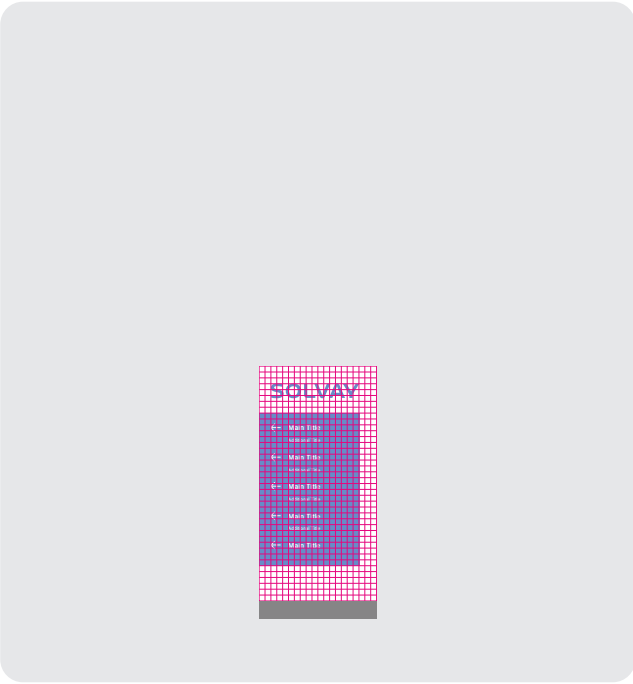

Catalogue number SOL-DIR-NI-1350

Layout specifications

Element	675 mm x 1350 mm x 100 mm
Font size large	118 pt
Font size small	78 pt
Grid	20 x 40

Directionals

Size chart

Item	Catalogue no.	Height	Width	Depth
Directional Illuminated 3000	SOL-DIR-I-3000	3000 mm	1250 mm	150 mm
Directional Non-Illuminated 1800	SOL-DIR-NI-1800	1800 mm	900 mm	100 mm
Directional Non-Illuminated 1350	SOL-DIR-NI-1350	1350 mm	675 mm	100 mm

Wayfinding Panel

Visualisation



Wayfinding Panel

Application guidelines

Purpose

Close-range site marking.

Mounting / Installation

Wall-mounted.

Production / Materials

Back layer:



- White ACM panel 5mm thick
- Logo: MACal 9839-10 Sky Blue

Front layer:

- White ACM panel 5mm thick
- Sky Blue fond Vinyl application:
MACal 9839-10 Sky Blue
- Content: White vinyl application

Mounting with 10mm hangingset Comhan nr 130297 or equal on the wall

Mounting with 10mm Black PVC between the layers

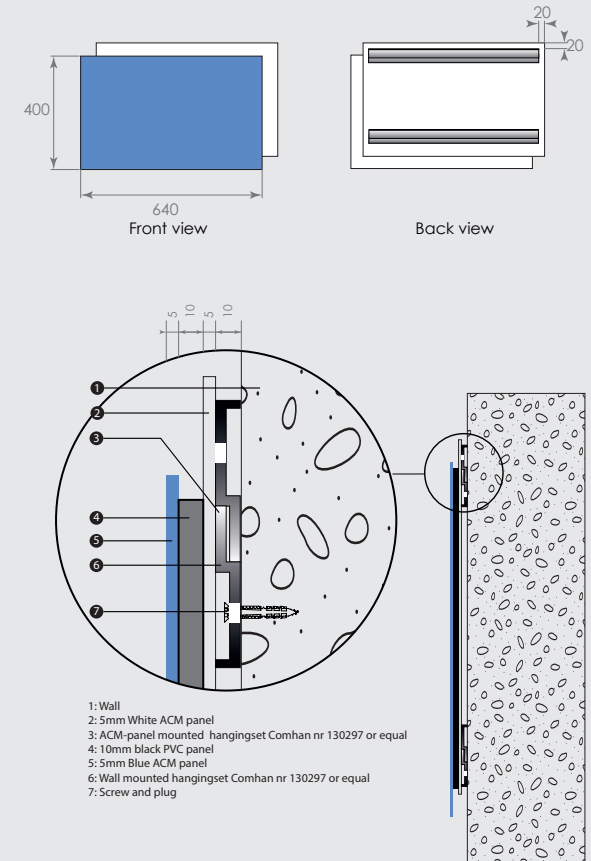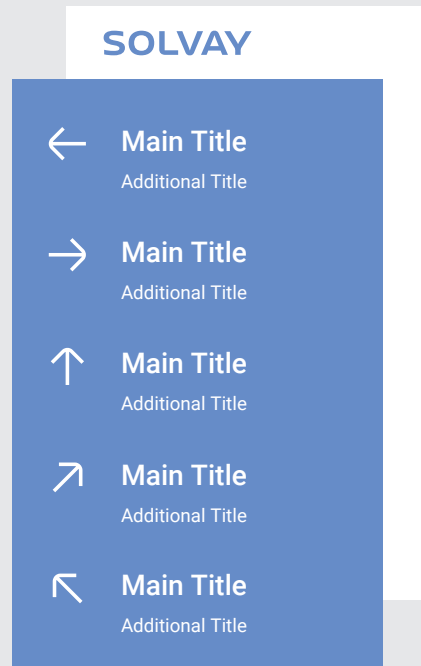

Wayfinding Panel


Variants in execution



Catalogue number SOL-WFP-P-640

Layout specifications


Element	400 mm x 640 mm
Font size large	86 pt
Font size small	57 pt
Grid	20 x 32

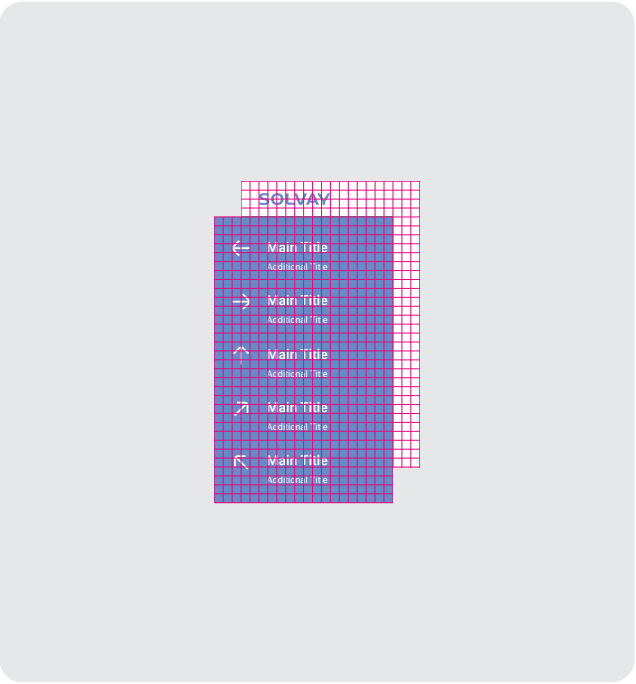

Catalogue number SOL-WFP-P-1000

Layout specifications

Element	625 mm x 1000 mm
Font size	135 pt
Font size	90 pt
Grid	20 x 32

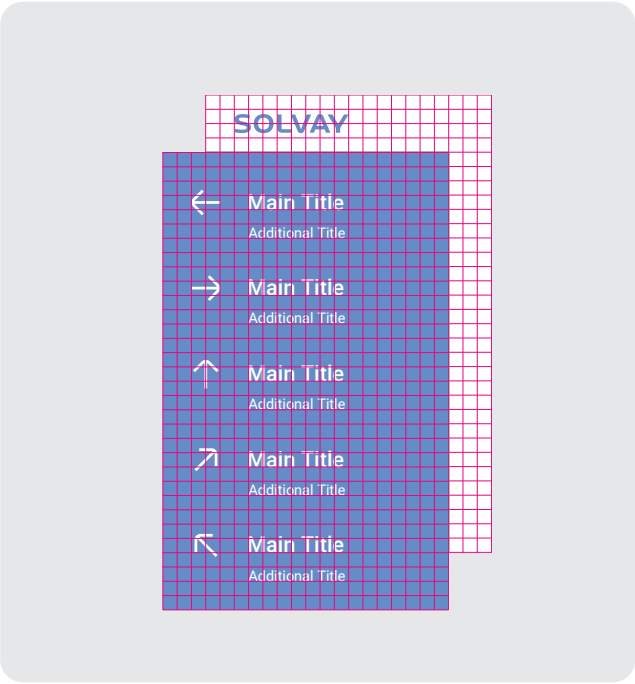


Catalogue number SOL-WFP-P-1600

Layout specifications

Element	1000 mm x 1600 mm
Font size large	216 pt
Font size small	144 pt
Grid	20 x 32

Wayfinding Panel


Variants in execution

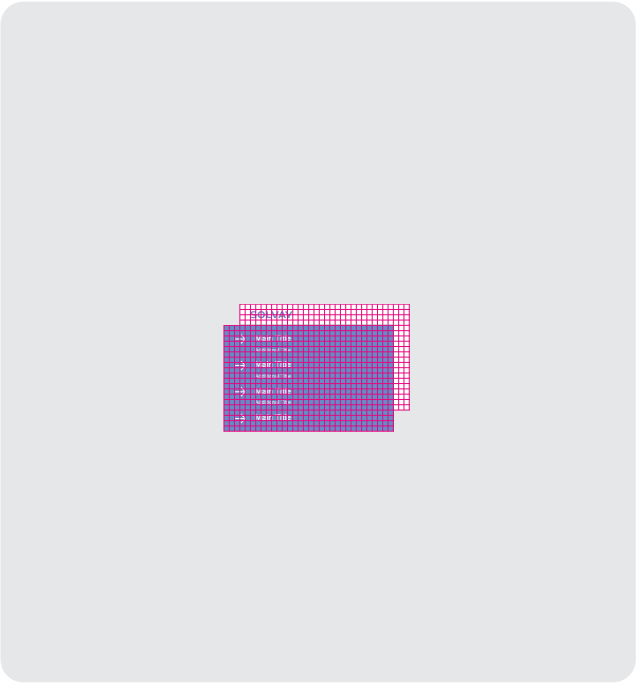

Catalogue number SOL-WFP-L-640

Layout specifications


Element	640 mm x 400 mm
Font size large	86 pt
Font size small	57 pt
Grid	20 x 32

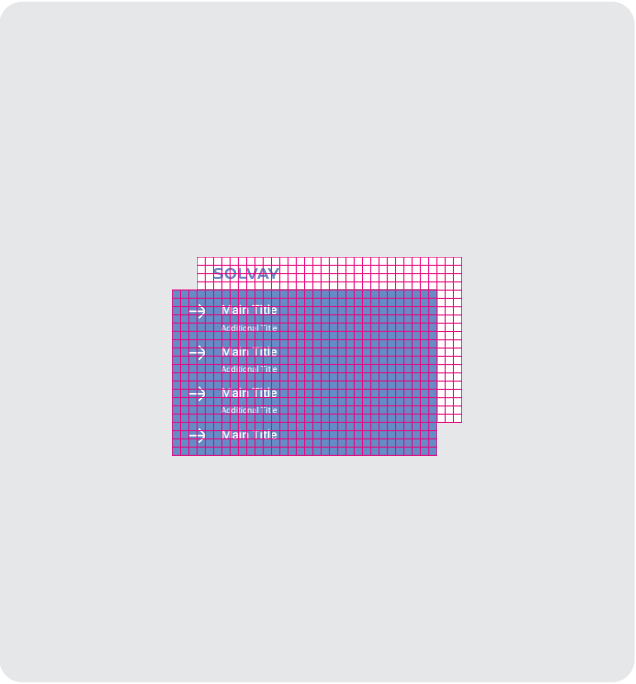

Catalogue number SOL-WFP-L-1000

Layout specifications

Element	1000 mm x 625 mm
Font size	135 pt
Font size	90 pt
Grid	20 x 32

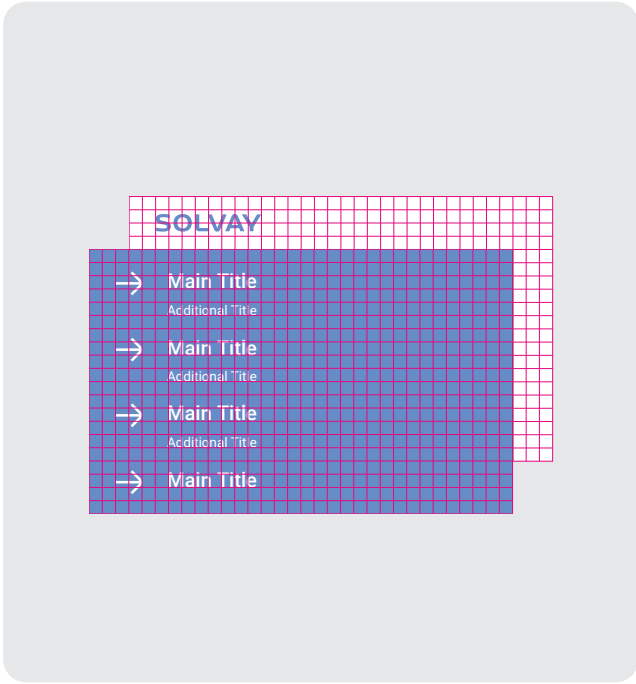

Catalogue number SOL-WFP-L-1600


Layout specifications

Element	1600 mm x 1000 mm
Font size large	216 pt
Font size small	144 pt
Grid	20 x 32

Wayfinding Freestanding

Variants in execution

Front

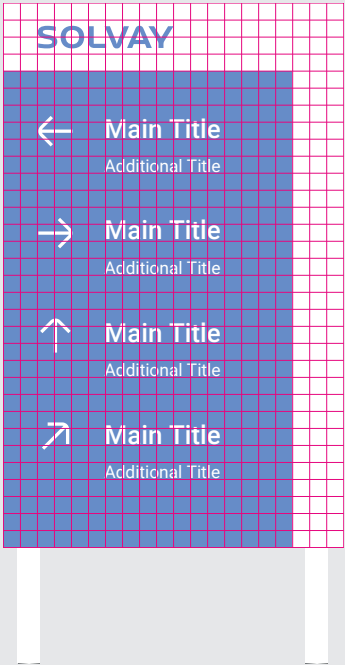

Catalogue number SOL-WFP-F-1440

Layout specifications

Element	900 mm x 1440 mm
Font size	195 pt
Font size	130 pt
Grid	20 x 32

Materialisation


Wayfinding Freestanding

Frame

- 50x50x4 mm white spray-painted aluminium
- Inverted U-shape, upper beam welded to the poles
- The frame falls 50mm inside the panel at the sides and top.
- The legs should be at least 800mm in the ground, reinforced with anchor and concrete if necessary

Panel

- White ACM panel 5mm thick
- Mounted with glue and/or double-sided tape on the frame
- Sky Blue fond and logo vinyl application: MACal 9839-10 Sky Blue
- Content: White vinyl application

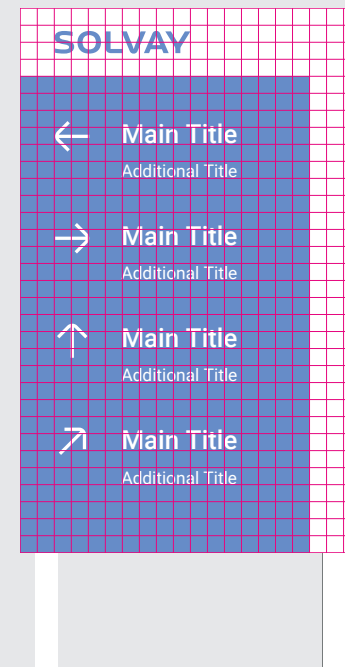

Wayfinding Panel

Size chart

Portrait

Item	Catalogue no.	Height	Width	Depth
Wayfinding Panel Portrait 640	SOL-WFP-P-640	640 mm	400 mm	30 mm
Wayfinding Panel Portrait 1000	SOL-WFP-P-1000	1000 mm	625 mm	30 mm
Wayfinding Panel Portrait 1600	SOL-WFP-P-1600	1600 mm	1000 mm	30 mm

Landscape

Item	Catalogue no.	Height	Width	Depth
Wayfinding Panel Landscape 400	SOL-WFP-L-640	400 mm	640 mm	30 mm
Wayfinding Panel Landscape 625	SOL-WFP-L-1000	625 mm	1000 mm	30 mm
Wayfinding Panel Landscape 1000	SOL-WFP-L-1600	1000 mm	1600 mm	30 mm

Freestanding

Item	Catalogue no.	Height	Width	Depth
Wayfinding Panel Freestanding	SOL-WFP-F-1440	1440 mm	900 mm	30 mm

Entrance Sign

Visualisation



Entrance Sign

Application guidelines

Purpose

Close-range site marking.

Mounting / Installation



Wall-mounted.

Production / Materials

- White ACM panel 5mm thick
- Sky Blue fond and logo: MACal 9839-10 Sky Blue vinyl application
- Medium Blue watermark: Macal 9839-42 Pastel Blue vinyl application
- White Content: White vinyl application

Or printed full-colour, matching with the PMS-colours.


Mounting with 10mm hangingset Comhan nr 130297 or equal on the wall

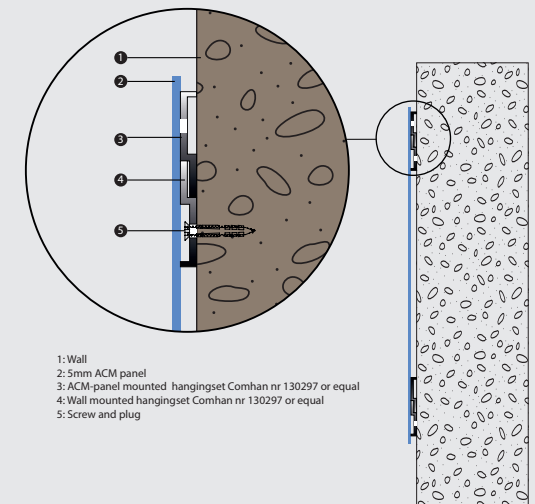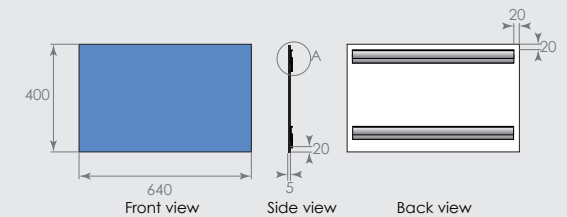

- 1: Wall
2: 5mm ACM panel
3: ACM-panel mounted hangingset Comhan nr 130297 or equal
4: Wall mounted hangingset Comhan nr 130297 or equal
5: Screw and plug

Entrance Sign


Variants in execution

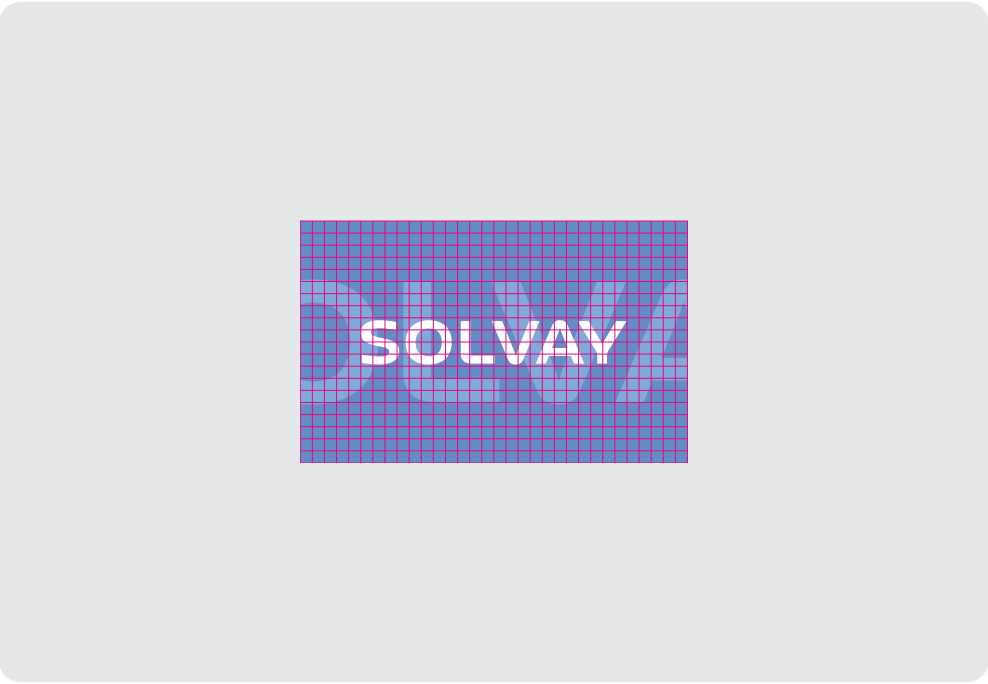

Catalogue number SOL-ES-400B

Layout specifications

Element	640 mm x 400 mm
Grid	32 x 20
Corner radius	40 mm

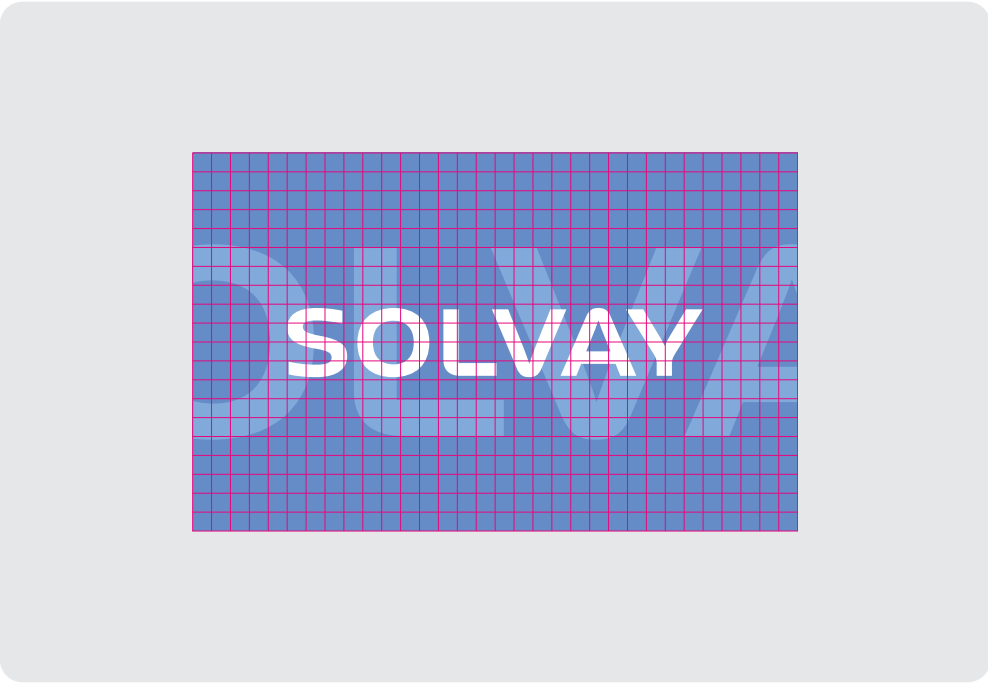

Catalogue number SOL-ES-625B

Layout specifications

Element	1000 mm x 625 mm
Grid	32 x 20
Corner radius	62,5 mm

Entrance Sign


Variants in execution



Catalogue number SOL-ESA-400B

Layout specifications

Element	640 mm x 400 mm
Grid	32 x 20
Corner radius	40 mm

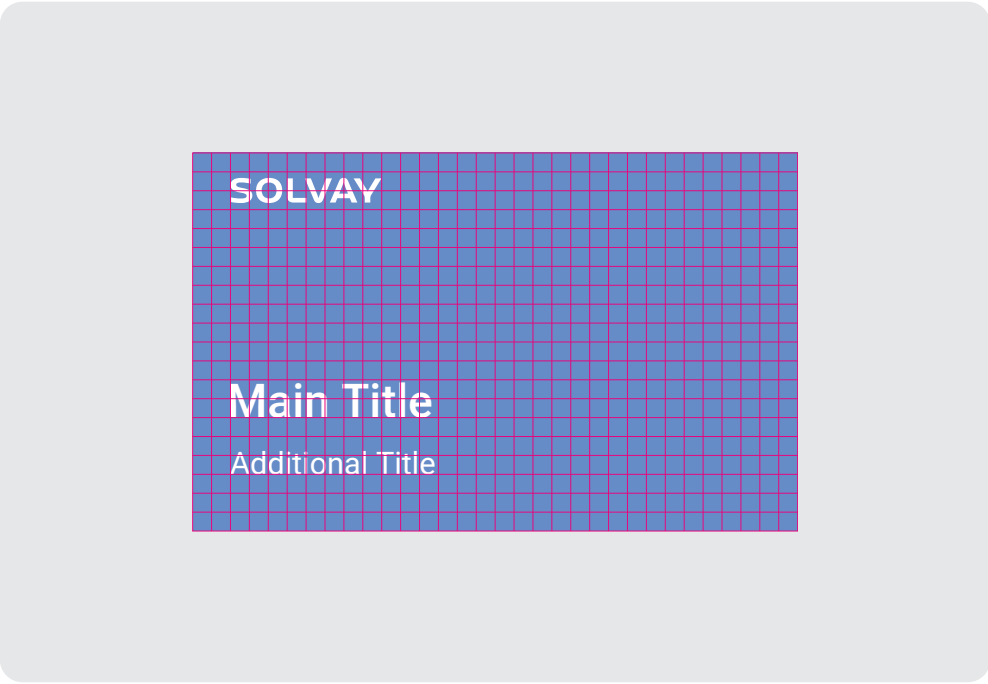


Catalogue number SOL-ESA-625B

Layout specifications

Element	1000 mm x 625 mm
Grid	32 x 20
Corner radius	62,5 mm

Entrance Sign


Variants in execution

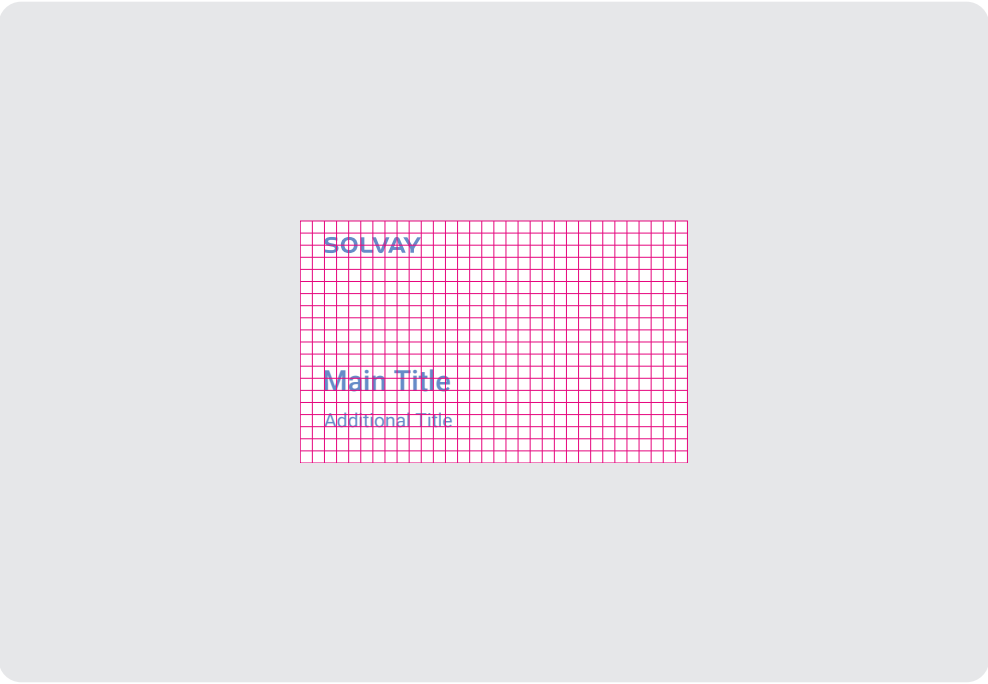

Catalogue number SOL-ESA-400W

Layout specifications

Element	640 mm x 400 mm
Grid	32 x 20
Corner radius	40 mm

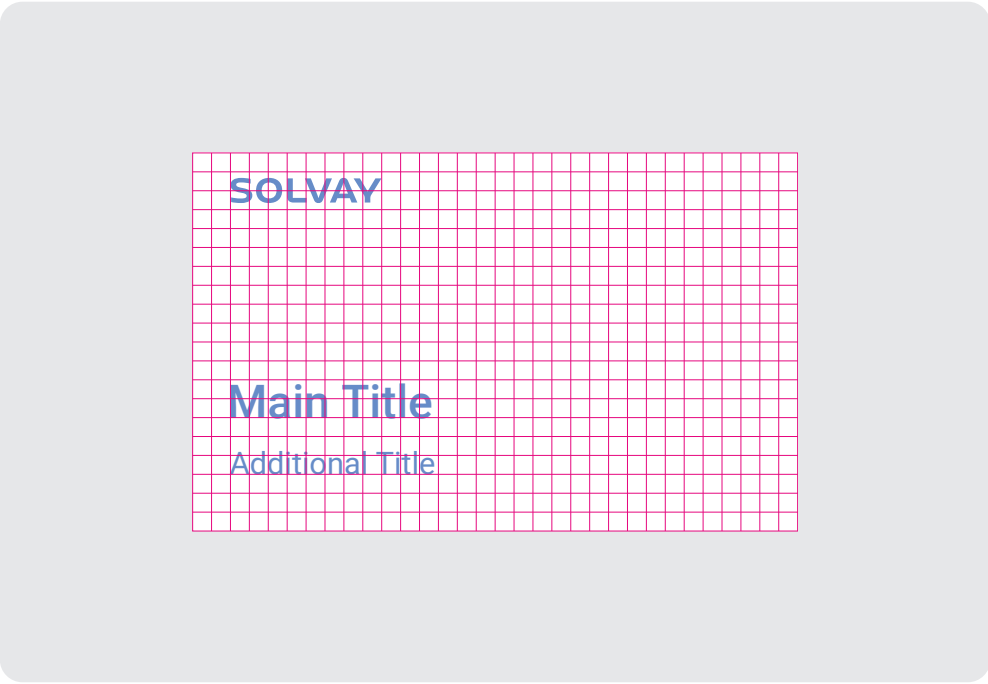

Catalogue number SOL-ESA-625W

Layout specifications

Element	1000 mm x 625 mm
Grid	32 x 20
Corner radius	62,5 mm

Entrance Sign

Size Chart

Item	Catalogue no.	Height	Width	Depth
Entrance Sign 400	SOL-ES-400B	400 mm	640 mm	15 mm
Entrance Sign 625	SOL-ES-625B	625 mm	1000 mm	15 mm

Item	Catalogue no.	Height	Width	Depth
Entrance Sign Address 400 Blue	SOL-ESA-400B	400 mm	640 mm	15 mm
Entrance Sign Address 625 Blue	SOL-ESA-625B	625 mm	1000 mm	15 mm

Item	Catalogue no.	Height	Width	Depth
Entrance Sign Address 400 White	SOL-ESA-400W	400 mm	640 mm	15 mm
Entrance Sign Address 625 White	SOL-ESA-625W	625 mm	1000 mm	15 mm

Parking Sign

Visualisation



Parking Sign

Application guidelines

Purpose

Close-range site marking.

Mounting / Installation

Wall-mounted and freestanding.

Production / Materials

Vertical Wall Mounted:

- Double-layered 5mm ACM panel
- 10 mm hangingset Comhan nr 130297 or equal between wall, and 10mm black PVC between panels
- Logo and Fond: MACal 9839-10 Sky Blue vinyl application
- Content: White vinyl application

Vertical Freestanding:



- Square 1800mm White aluminium pole (40x40x3)
- Pole 800mm in-ground, 1000 mm above
- Double-layered 5mm ACM panel
- White ACM panel directly mounted on the pole. Between the two panels 10mm Black PVC.
- Fond: MACal 9839-10 Sky Blue vinyl application
- Content: White vinyl application

Horizontal Wall Mounted:

- Single layered 5mm ACM panel
- 10 mm hangingset Comhan nr 130297 or equal between wall and panel
- Fond: MACal 9839-10 Sky Blue vinyl application
- Content: White vinyl application

Horizontal Freestanding:


- Square 1800mm White aluminium pole (40x40x3)
- Pole 800mm in-ground, 1000 mm above
- 5 mm ACM panel between the pole and the panel.
- Logo and Fond: MACal 9839-10 Sky Blue vinyl application
- Content: White vinyl application

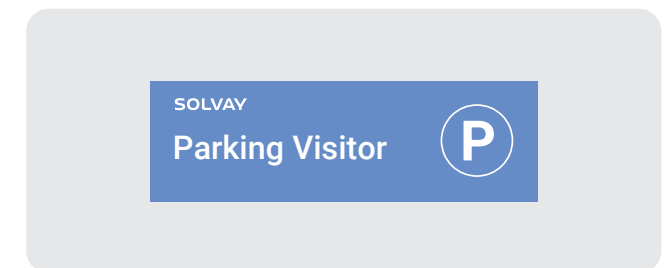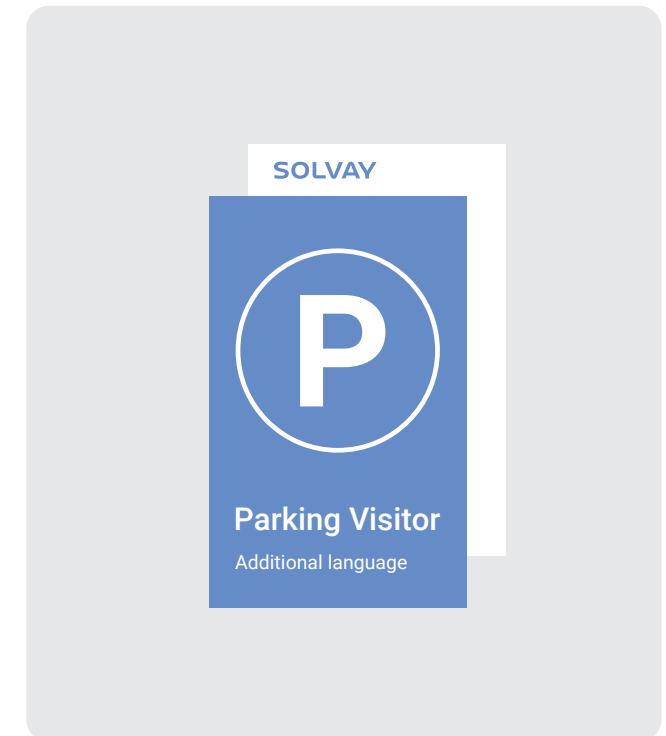


Parking Sign

Application guidelines


Vertical Wall Mounted

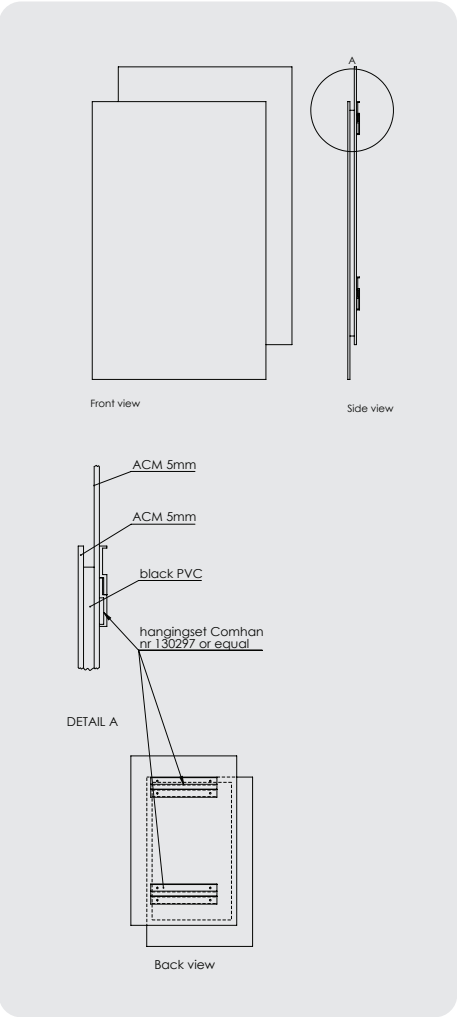


Vertical Freestanding

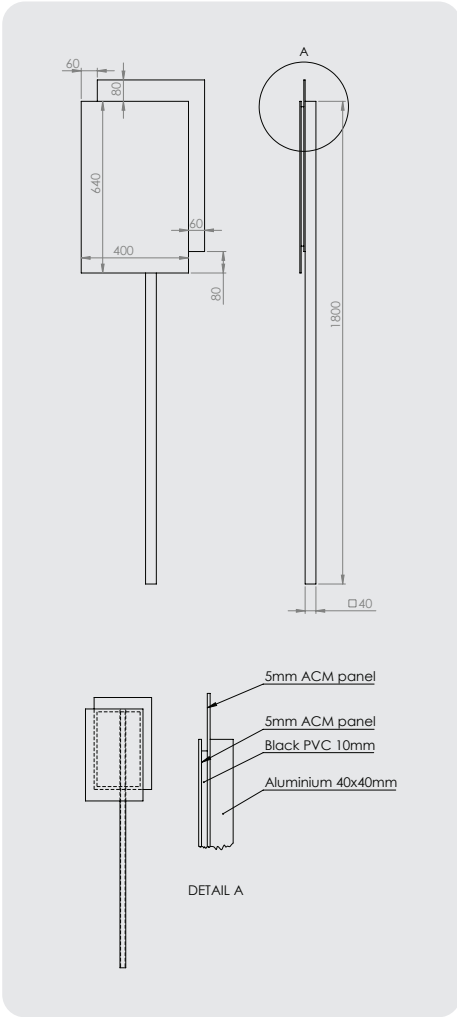

Horizontal Wall Mounted

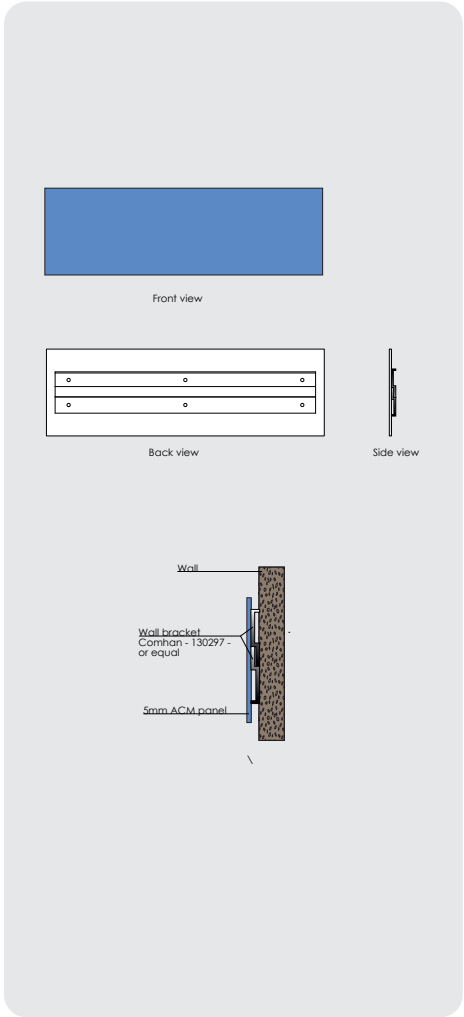


Horizontal Freestanding

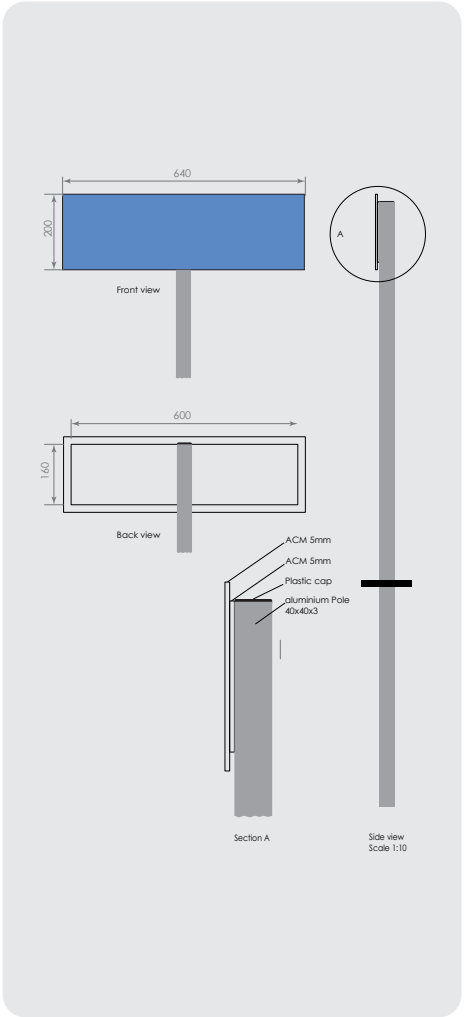

Parking Sign


Variants in execution

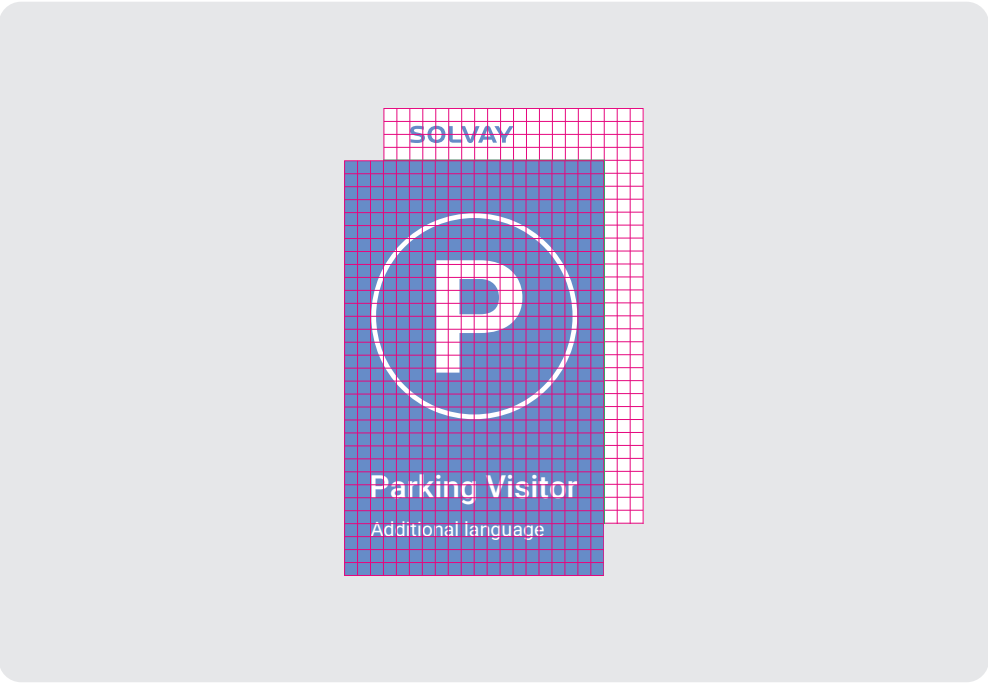

Catalogue number SOL-PS-WM-V-640

Layout specifications

Element	400 mm x 640 mm
Font size large	138 pt
Font size small	86 pt
Grid	20 x 32

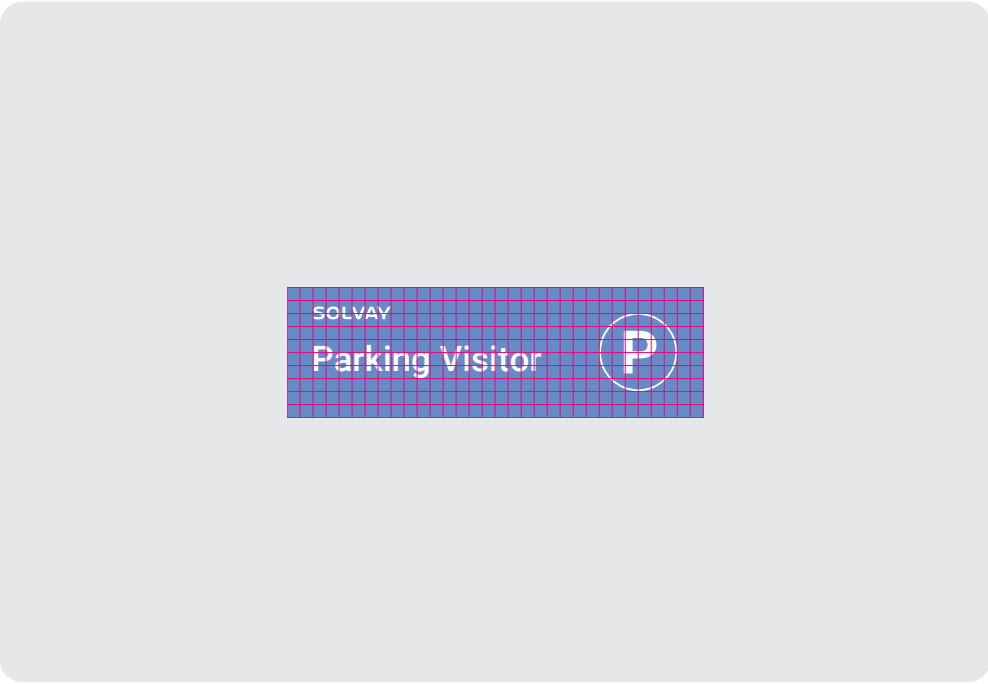

Catalogue number SOL-PS-WM-H-200

Layout specifications

Element	640 mm x 200 mm
Font size large	138 pt
Font size small	86 pt
Grid	32 x 20

Parking Sign freestanding


Variants in execution



Catalog number SOL-PS-FS-V-640

Layout specifications

Element	400 mm x 640 mm
Font size large	138 pt
Font size small	86 pt
Grid	20 x 32

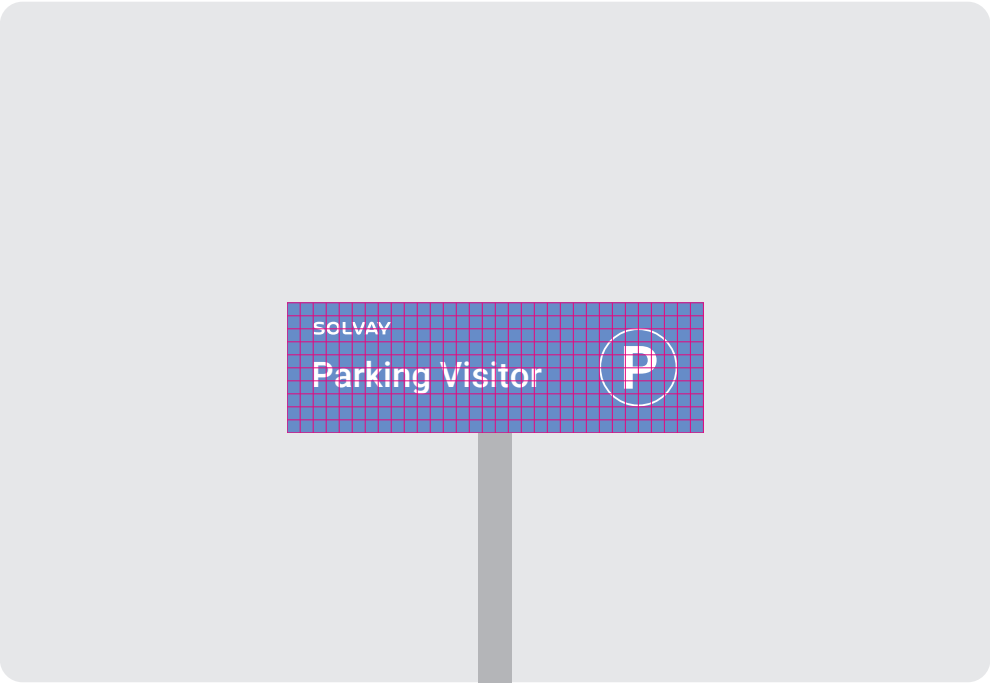

Catalogue number SOL-PS-FS-H-200

Layout specifications

Element	640 mm x 200 mm
Font size large	138 pt
Font size small	86 pt
Grid	32 x 20

Parking Sign

Size Chart

Item	Catalogue no.	Height	Width	Depth
Parking Sign Wall-Mounted Vertical 400	SOL-PS-WM-V-640	640 mm	400 mm	30 mm
Parking Sign Wall-Mounted Horizontal 200	SOL-PS-WM-H-200	200 mm	640 mm	15 mm
Parking Sign Freestanding Vertical 400	SOL-PS-FS-V-640	640 mm	400 mm	30 mm
Parking Sign Freestanding Horizontal 200	SOL-PS-FS-H-200	200 mm	640 mm	15 mm

Flags

Visualisation



Flags

Application guidelines

Purpose

Long-range site marking

Mounting / Installation

Installation at the entrance of the site (perpendicular to the direction of travel) or the extreme corners of the site (perpendicular to the direction of travel).

Production / Materials

Flag

Screen printing on spun polyester, +/- 160 gr/m² with reinforced seam/hem.

Pole

6m white pole (Ral 9016) with adjustable tilt anchor and ball bearing banner holder. The double ball bearing ensures long-term, problem-free operation. In addition, the bracket bar can be dismantled so that the pole can also be used, for example, "normal" flags.

To include

- Tilting anchor, adjustable hot-dip Galvanized, M20 threaded ends, including concrete foundation
- Full warranty against breakage



Flags

Variants in execution

Front



Back



Catalogue number SOL-FL-B-1500

Layout specifications

Element
Grid

2250 mm x 1500 mm
45 x 20

Flags

Variants in execution

Front

SOLVAY

Back

YAVJOZ

Catalogue number SOL-FL-W-1500

Layout specifications

Element

2250 mm x 1500 mm

Grid

45 x 20

Flags

Size Chart

Item	Catalogue no.	Height	Width
Flag Blue	SOL-FL-B-1500	1500 mm	2250 mm
Flag White	SOL-FL-W-1500	1500 mm	2250 mm

Banners

Visualisation



Banner

Application guidelines

Purpose

Long-range site marking

Mounting / Installation

Installation at the entrance of the site (perpendicular to the direction of travel) or the extreme corners of the site (perpendicular to the direction of travel).

Production / Materials

Banner

Screen printing on spun polyester, +/- 160 gr/m² with reinforced seam/hem.

Pole

7m (236 1/4") pole with adjustable tilt anchor and ball bearing banner holder. The double ball bearing ensures long-term, problem-free operation. In addition, the bracket bar can be dismantled so that the pole can also be used, for example, "normal" flags. Pole, white as RAL 9016


To include

- Tilting anchor, adjustable hot-dip Galvanized, M20 threaded ends, including concrete foundation
- Black cover button to prevent banners from blowing up
- Full warranty against breakage
- Heavy-duty storm head, self-lubricating plain bearing, with profiled outrigger rod in aluminium
- Counterweight and rings



Banner

Materialisation

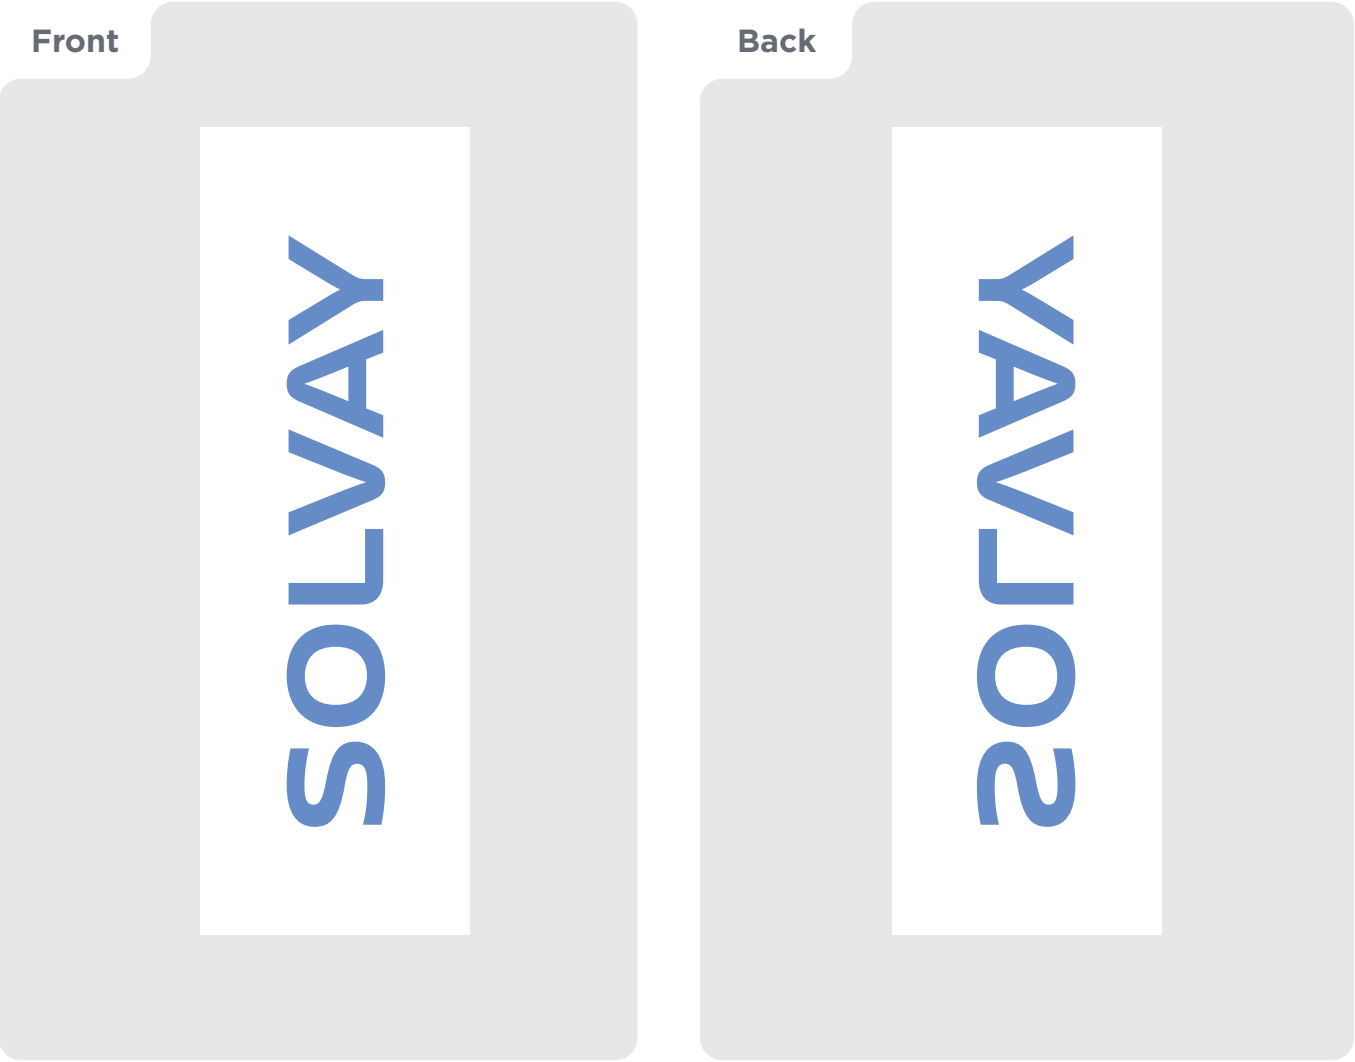

Catalogue number SOL-BA-W-4800

Layout specifications

Element	1000 mm x 4800 mm
Grid	20 x 96

Banner

Materialisation

Front



Back



Catalogue number SOL-BA-B-4800

Layout specifications

Element	1000 mm x 4800 mm
Grid	20 x 96

Banner

Size Chart

Item	Catalogue no.	Height	Width
Banner Blue 4800	SOL-BA-B-4800	4800 mm	1000 mm
Banner White 4800	SOL-BA-W-4800	4800 mm	1000 mm

Foil Application Building Windows

Visualisation



Foil Application Building Windows

Application guidelines


Purpose

Long-distance marking

Application

The optimal place and size of the “Foil application building windows” is on a glass facade. Depending on the architectural features of the building, the desired amount of visibility to the outside, and the legibility of the logo, there are three different film applications.

The logo may be applied in its entirety or a cut-out of part of the logo. The proportions of the logo must be respected. Any overlaps due to size limitations of the chosen material are allowed. This may be by using a carpet cut or with a straight overlap of up to 10 mm.

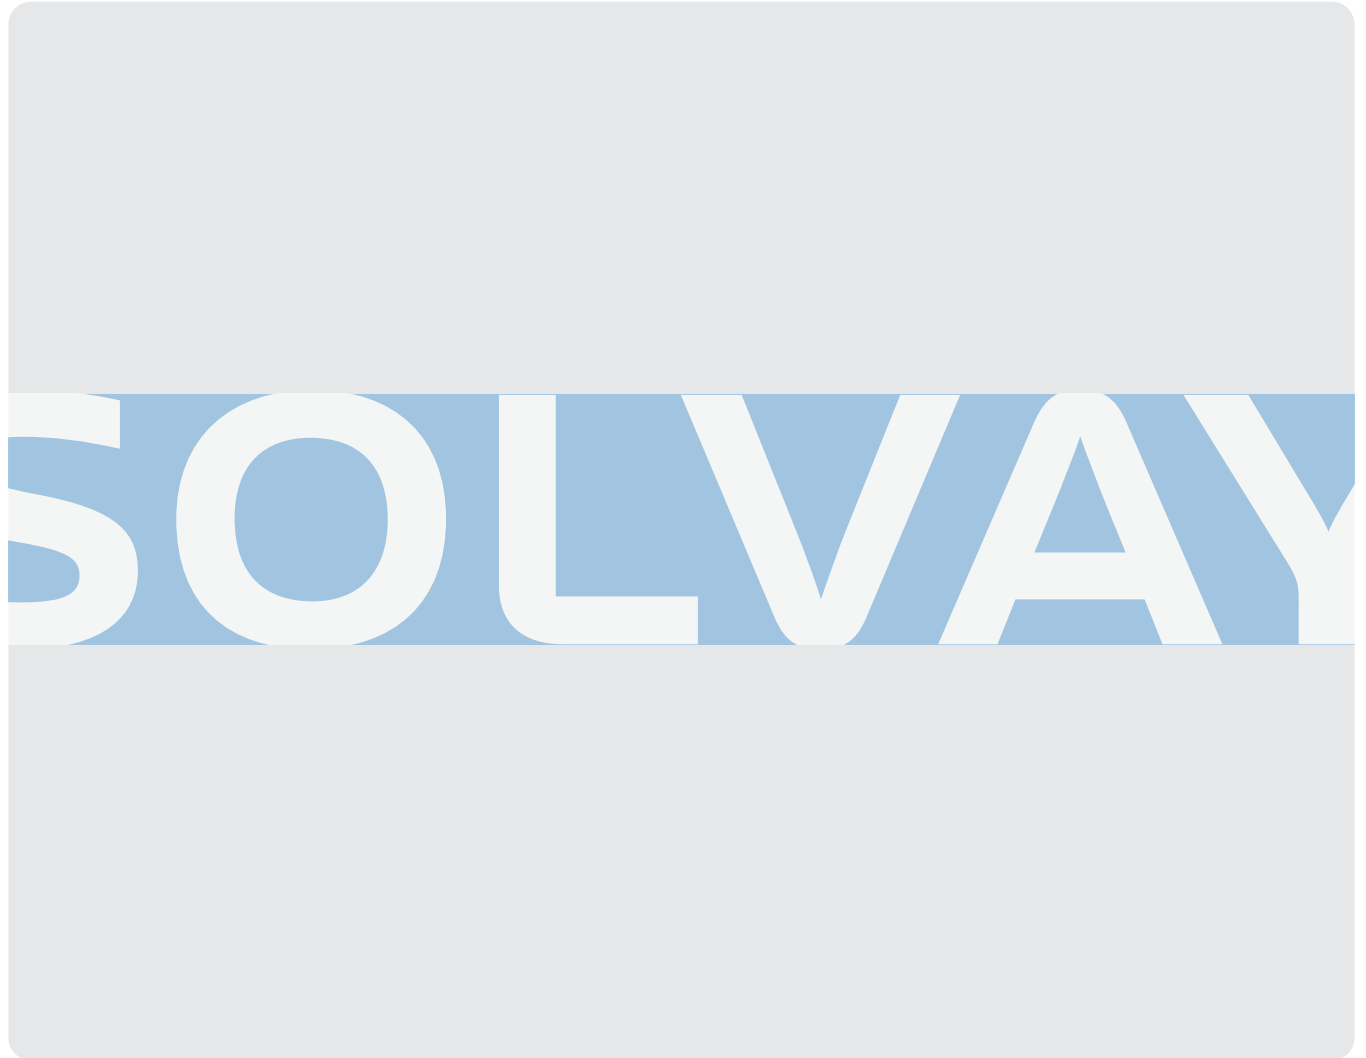

Foil Application Building Windows

Materialisation

Mandatory installation

Installation on a glass facade, excluding the window bars. Preferably mounted on the outside, except “Perforated Window Film”, which should always be installed on the outside.

Illumination and connection

The film application should be applied to the physical glass at all times. On windows on which film is already applied, for example, sun protection or burglary prevention, these sorts of films should be removed. Should this be undesirable, these panes cannot be used as a substrate for the film to be applied.

Protection Zone

The protection zone around the logo does not have to be respected with the “Foil Application Building Windows”. However, the complete logo must fit on the entire facade, where the stick height of the text may be respected.

Production / Materials

Dusted glass foil

- Dusted vinyl application
- Minimum 8-year durability guarantee
- Blurring the view outside and inside

Opaque foil

- Opaque premium cast vinyl with gloss white face and white adhesive side
- Minimum 8-year durability guarantee
- No view outside and inside

Perforated window film

- Perforated film with a white front and black adhesive side.
- 1,6 mm holes with 40% open area
- Minimum 3-year durability guarantee
- Well (limited) view outwards, no view inwards

Foil Application Building Windows

Size Chart

Item	Catalogue no.	Height	Width
Foil Application Building Windows Etched	SOL-FA-BW-Etched	Various	Various
Foil Application Building Windows White	SOL-FA-BW-White	Various	Various
Foil Application Building Windows Perforated	SOL-FA-BW-Perforated	Various	Various

Solvay ECo

Internal signage



Internal Wayfinding Twin Panel Glass

Visualisation



Internal Wayfinding Twin Panel Glass

Application guidelines

Purpose

Wayfinding or information

Materialisation

Back panel

- 5mm ACM panel with Sky Blue vinyl application (MACal 9839-10 Sky Blue)
- eventually with white vinyl application arrow

Front panel


- 5mm clear acrylic
- content white vinyl application

Mounting / Installation

Chipboard screws both panels. Between the wall and both panels, there should be a transparent plastic spacer with a length and diameter of 10mm. A plastic Sky Blue cover cap is placed on the ball head of the chipboard screw.


Disclaimer

The arrow on the back panel can only be applied if it matches the direction of all content on the front-panel. For different directions, it is indicated by smaller arrows on the front transparent panel.

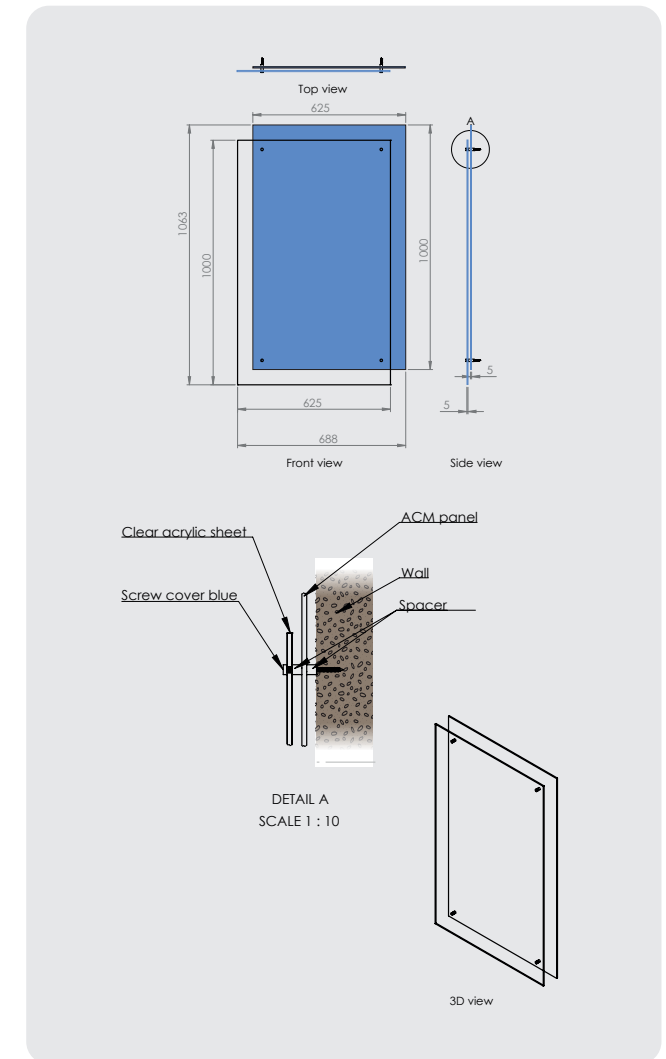

Internal Wayfinding Twin Panel Glass


Variants in execution

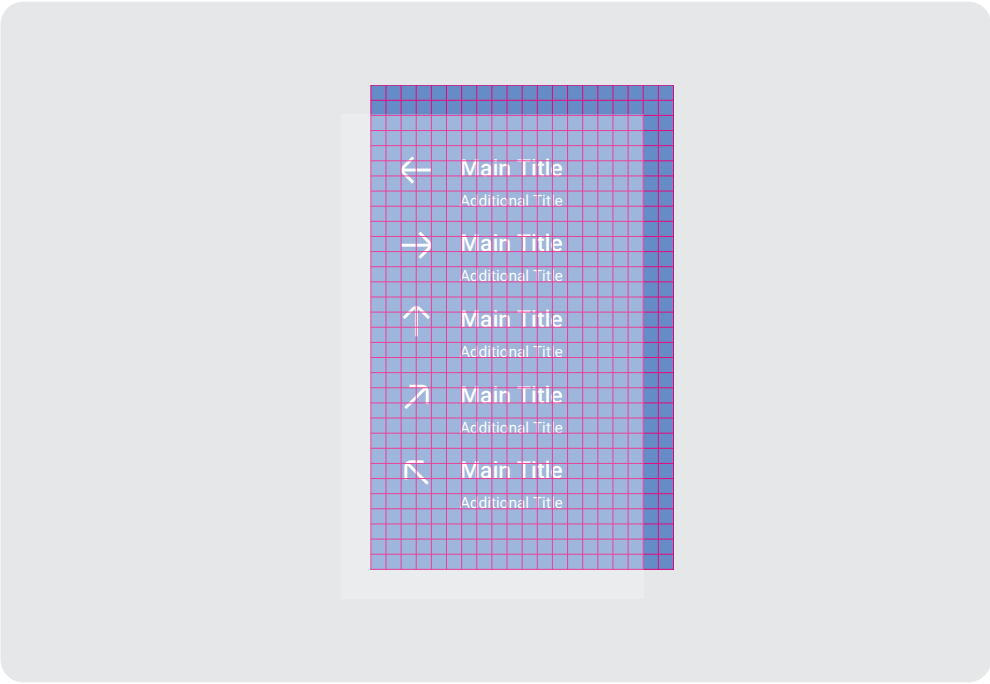

Catalogue number SOL-IW-TPG-V-1000

Layout specifications

Element	625 mm x 1000 mm
Font size large	135 pt
Font size small	90 pt
Grid	20 x 32

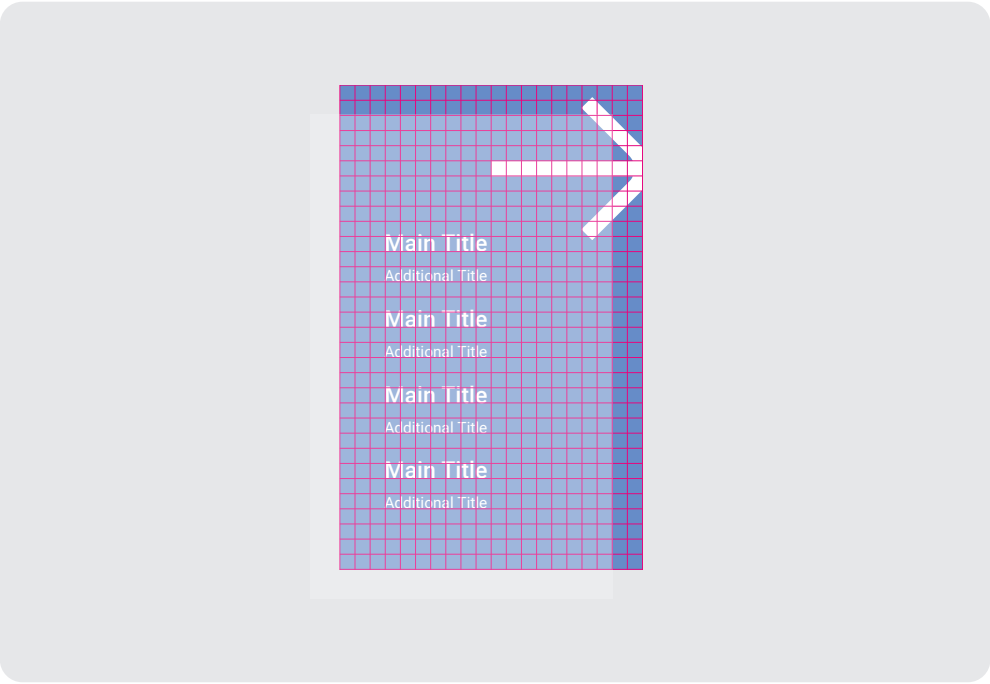


Catalogue number SOL-IW-TPG-VA-1000

Layout specifications

Element	625 mm x 1000 mm
Font size large	135 pt
Font size small	90 pt
Grid	32 x 20

Internal Wayfinding Twin Panel Glass


Variants in execution

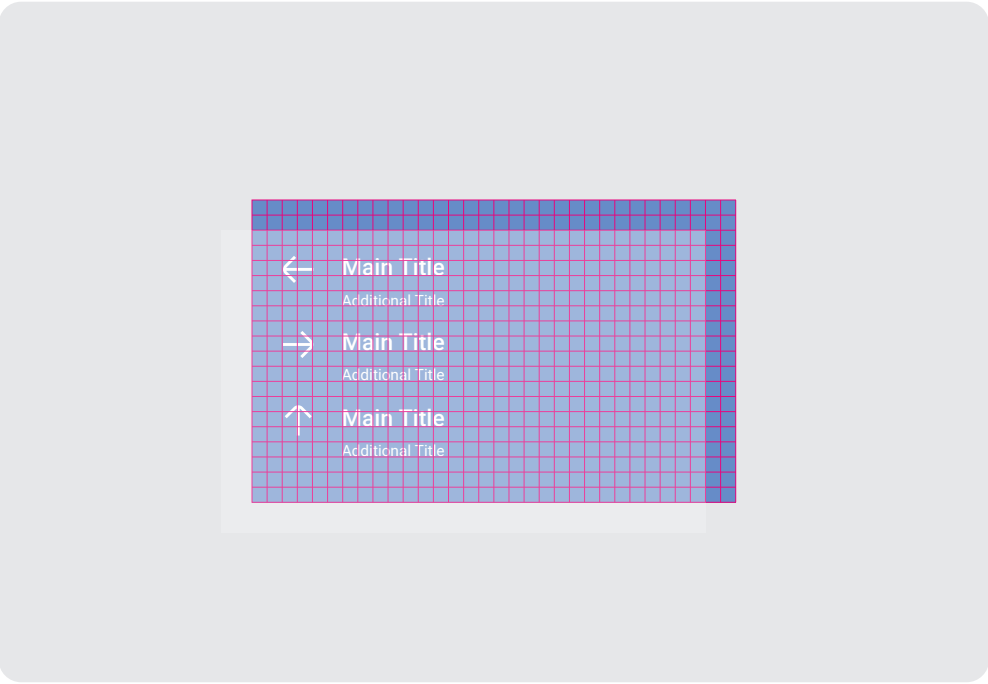

Catalogue number SOL-IW-TPG-H-625

Layout specifications

Element	1000 mm x 625 mm
Font size large	135 pt
Font size small	90 pt
Grid	20 x 32

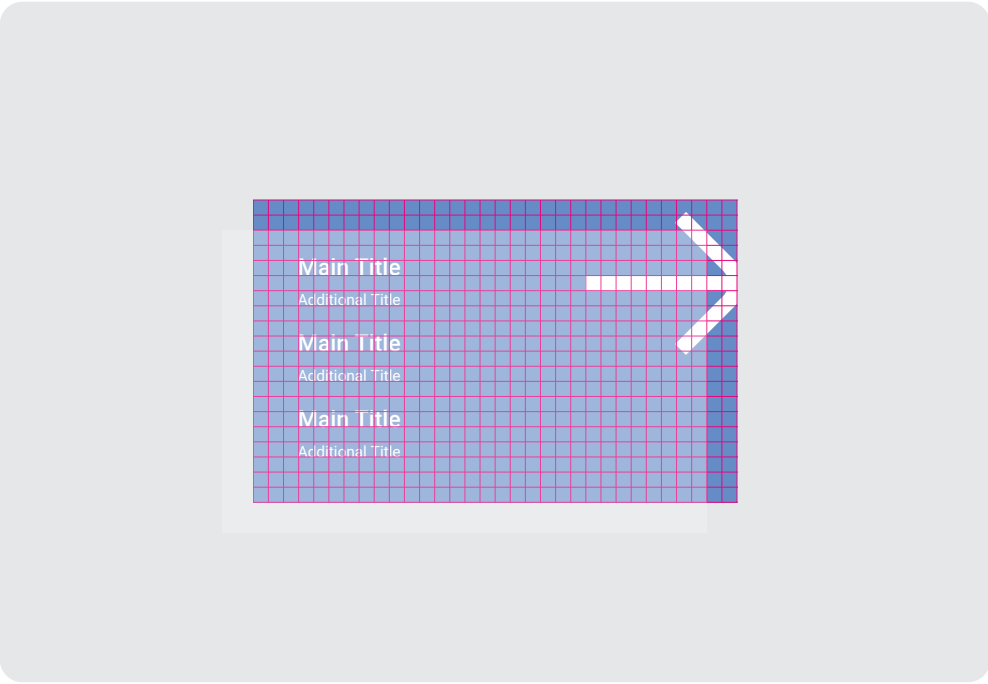


Catalogue number SOL-IW-TPG-HA-625

Layout specifications

Element	1000 mm x 625 mm
Font size large	135 pt
Font size small	90 pt
Grid	32 x 20

Internal Wayfinding Twin Panel Glass


Variants in execution

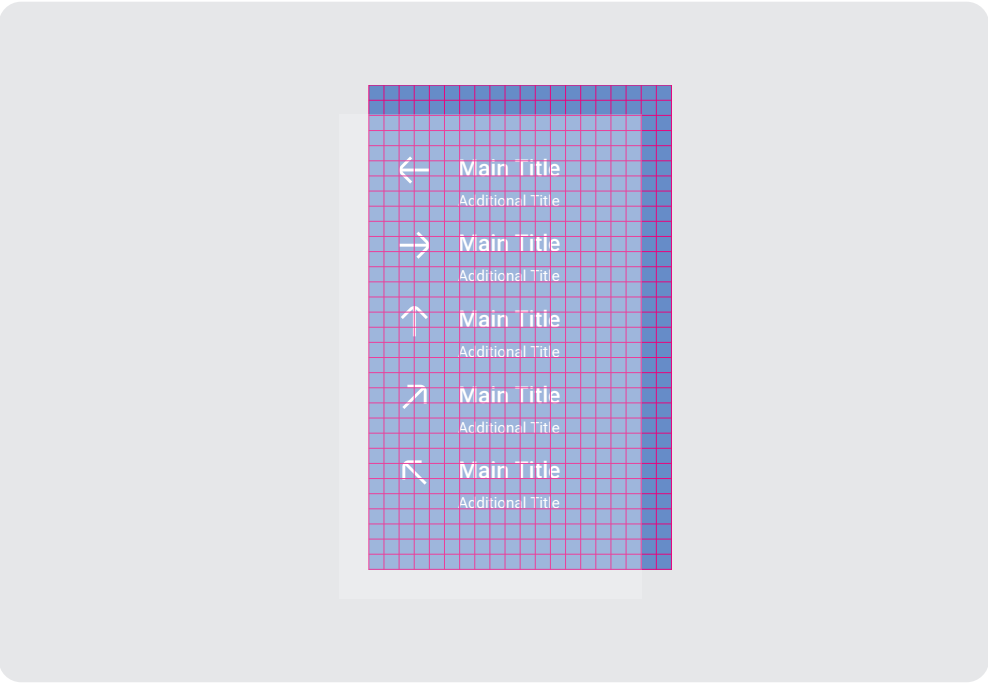

Catalogue number SOL-IW-TPG-V-640

Layout specifications

Element	400 mm x 640 mm
Font size large	86 pt
Font size small	57 pt
Grid	20 x 32

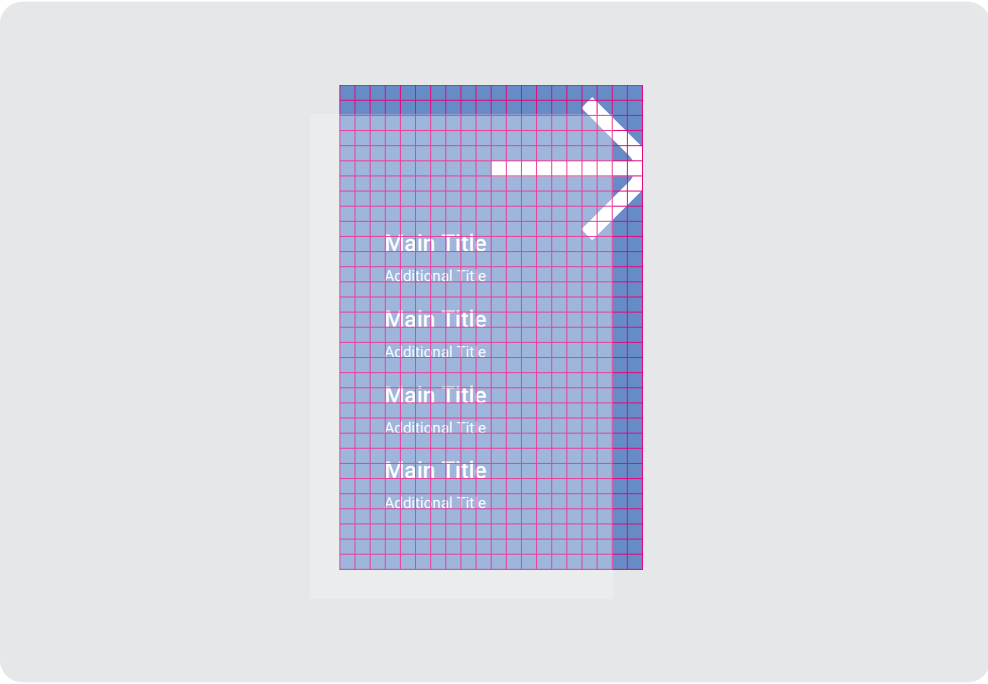


Catalogue number SOL-IW-TPG-VA-640

Layout specifications

Element	400 mm x 640 mm
Font size large	86 pt
Font size small	57 pt
Grid	32 x 20

Internal Wayfinding Twin Panel Glass


Variants in execution

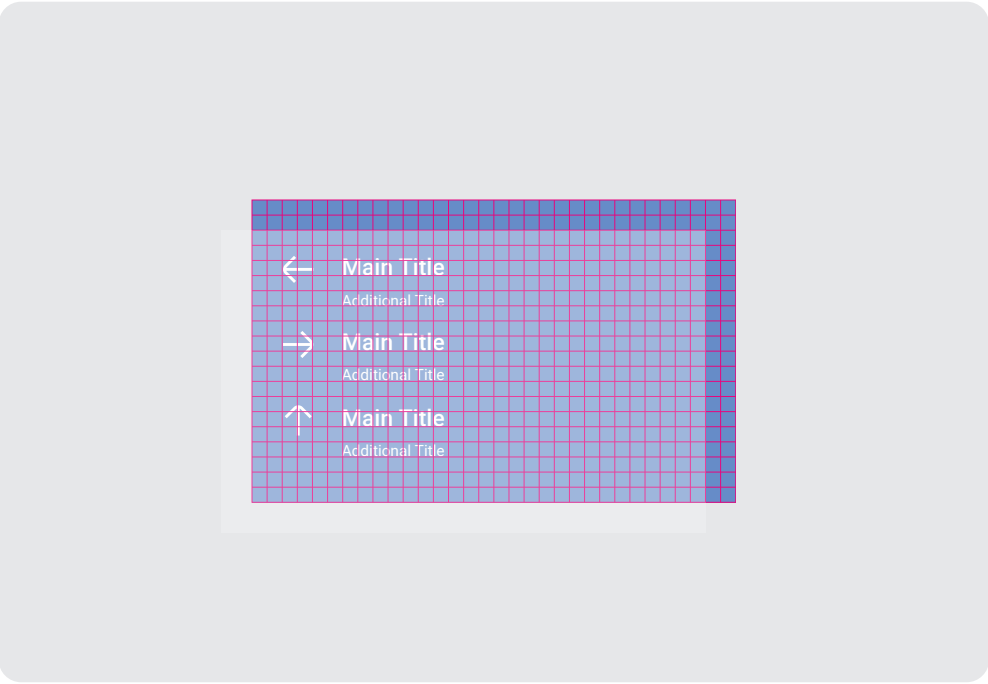

Catalogue number SOL-IW-TPG-H-400

Layout specifications

Element	640 mm x 400 mm
Font size large	86 pt
Font size small	57 pt
Grid	20 x 32

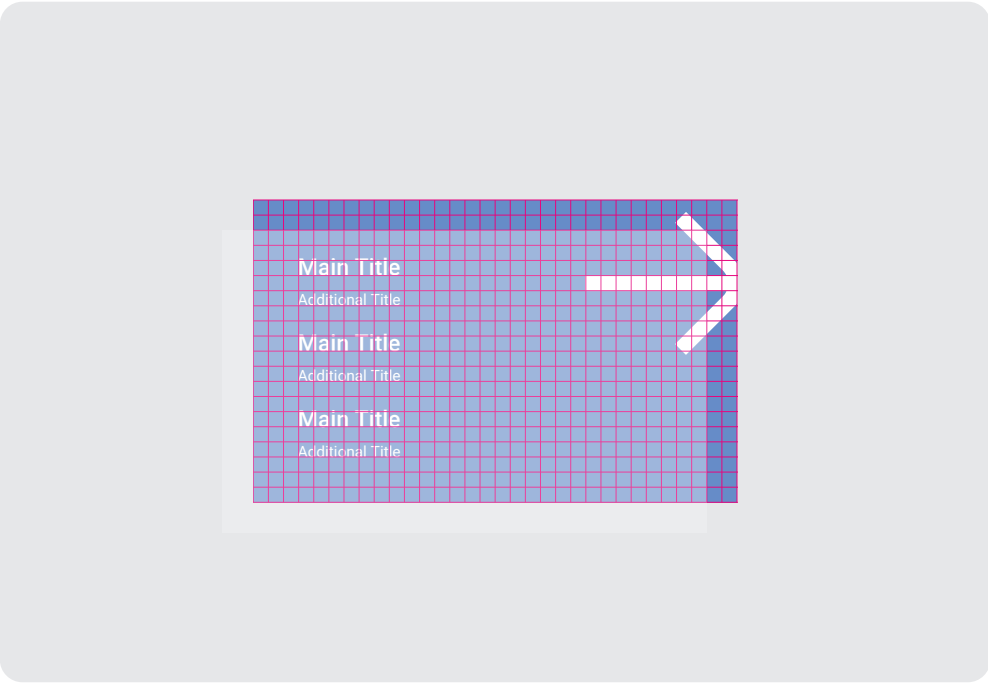

Catalogue number SOL-IW-TPG-HA-400

Layout specifications

Element	640 mm x 400 mm
Font size large	86 pt
Font size small	57 pt
Grid	32 x 20

Internal Wayfinding Twin Panel Glass

Size Chart

Item	Catalogue no.	Height	Width	Depth
Internal Wayfinding Twin Panel Glass Vertical 1000	SOL-IW-TPG-V-1000	1000 mm	625 mm	30 mm
Internal Wayfinding Twin Panel Glass Horizontal 625	SOL-IW-TPG-H-625	625 mm	1000 mm	30 mm
Internal Wayfinding Twin Panel Glass Vertical 640	SOL-IW-TPG-V-640	640 mm	400 mm	30 mm
Internal Wayfinding Twin Panel Glass Horizontal 400	SOL-IW-TPG-H-400	400 mm	640 mm	30 mm

Item	Catalogue no.	Height	Width	Depth
Internal Wayfinding Twin Panel Glass Vertical Arrow 1000	SOL-IW-TPG-VA-1000	1000 mm	625 mm	30 mm
Internal Wayfinding Twin Panel Glass Horizontal Arrow 625	SOL-IW-TPG-HA-625	625 mm	1000 mm	30 mm
Internal Wayfinding Twin Panel Glass Vertical Arrow 640	SOL-IW-TPG-VA-640	640 mm	400 mm	30 mm
Internal Wayfinding Twin Panel Glass Horizontal Arrow 400	SOL-IW-TPG-HA-400	400 mm	640 mm	30 mm

Internal Wayfinding Panel Simple White

Visualisation



Internal Wayfinding Panel Simple White

Application guidelines

Purpose

Wayfinding or information

Materialisation



- 5mm ACM panel
- Content: MACal 9839-10 Sky Blue vinyl application

Mounting / Installation

10mm long Nylon spacers (male-female), glued to the board and screwed into the wall.


Disclaimer

The big arrow can only be applied if it matches the direction of all content. For different directions, it is indicated by smaller arrows.

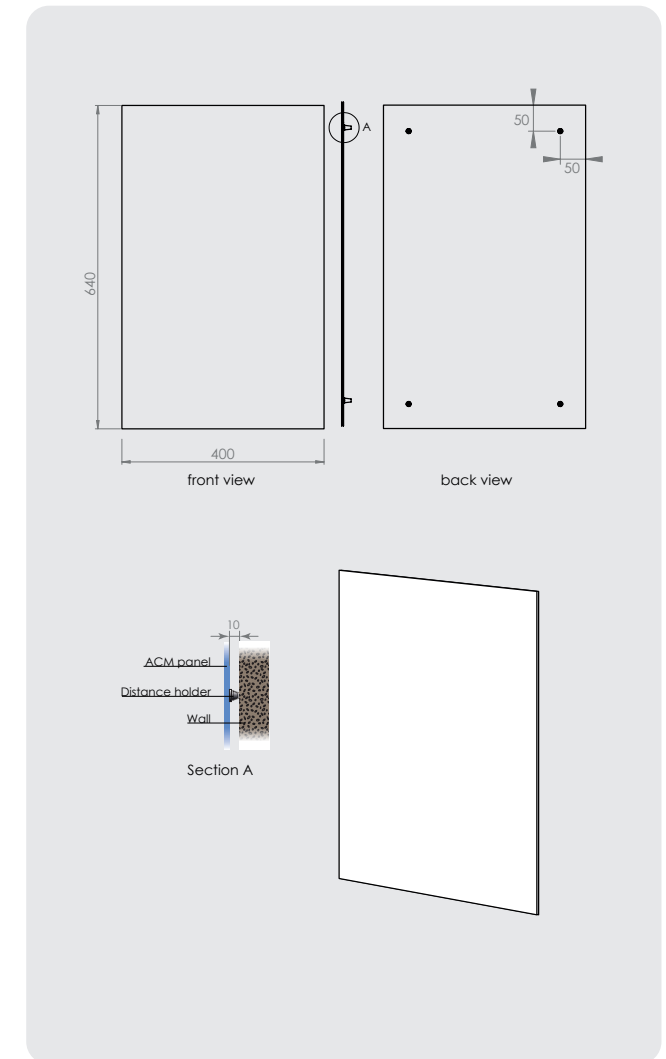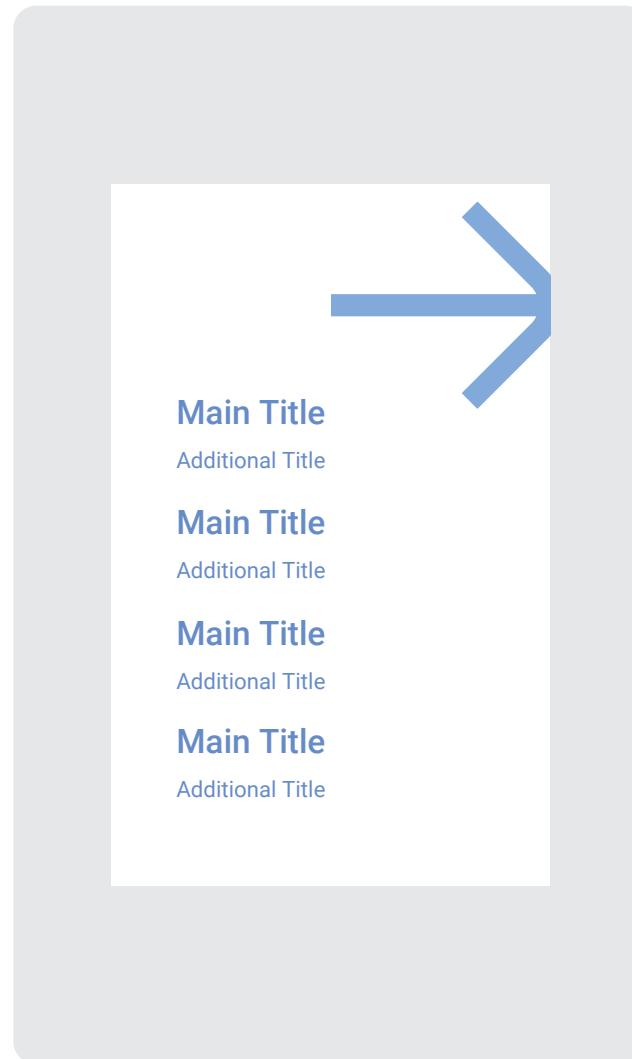

Internal Wayfinding Panel Simple White


Variants in execution

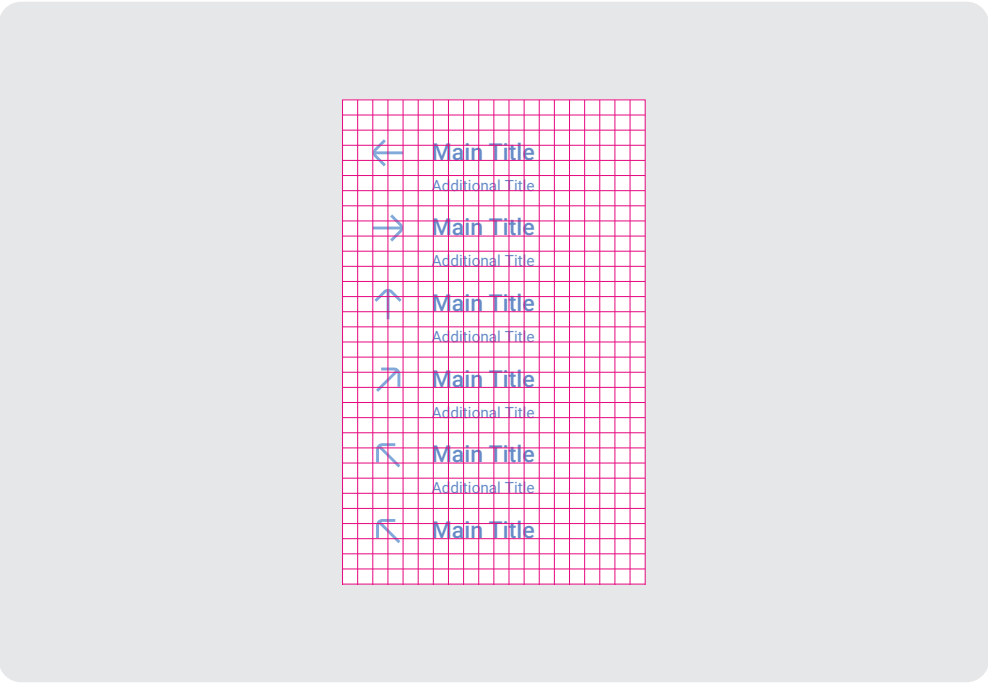

Catalogue number SOL-IW-PSW-V-1000

Layout specifications

Element	625 mm x 1000 mm
Font size large	135 pt
Font size small	90 pt
Grid	20 x 32

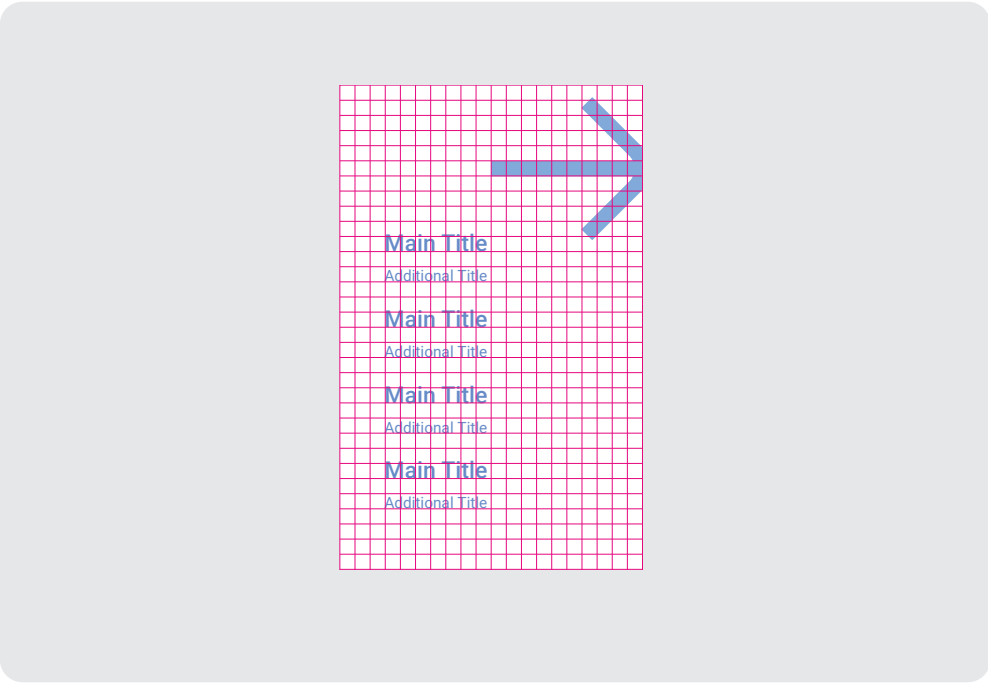


Catalogue number SOL-IW-PSW-VA-1000

Layout specifications

Element	625 mm x 1000 mm
Font size large	135 pt
Font size small	90 pt
Grid	32 x 20

Internal Wayfinding Panel Simple White


Variants in execution

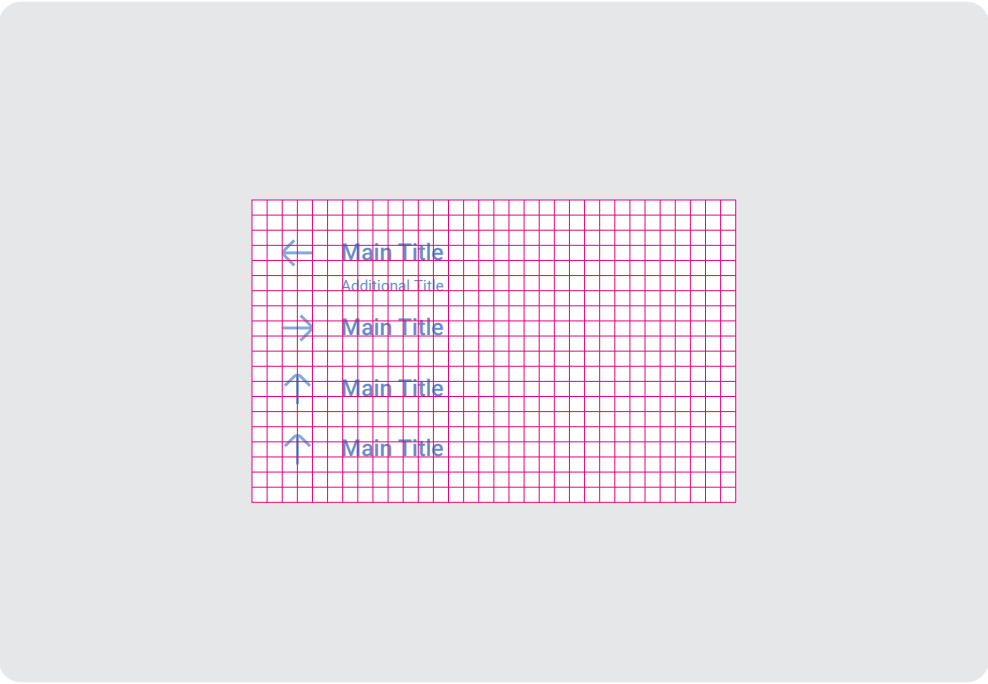

Catalog number SOL-IW-PSW-H-625

Layout specifications

Element	1000 mm x 625 mm
Font size large	135 pt
Font size small	90 pt
Grid	20 x 32

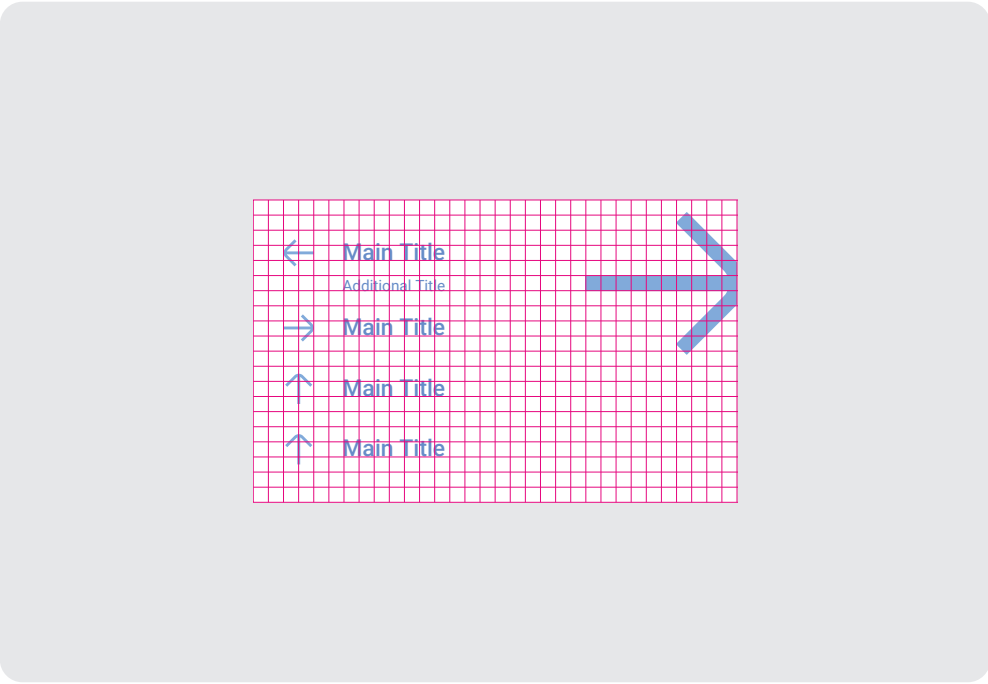


Catalogue number SOL-IW-PSW-HA-625

Layout specifications

Element	1000 mm x 625 mm
Font size large	135 pt
Font size small	90 pt
Grid	32 x 20

Internal Wayfinding Panel Simple White


Variants in execution

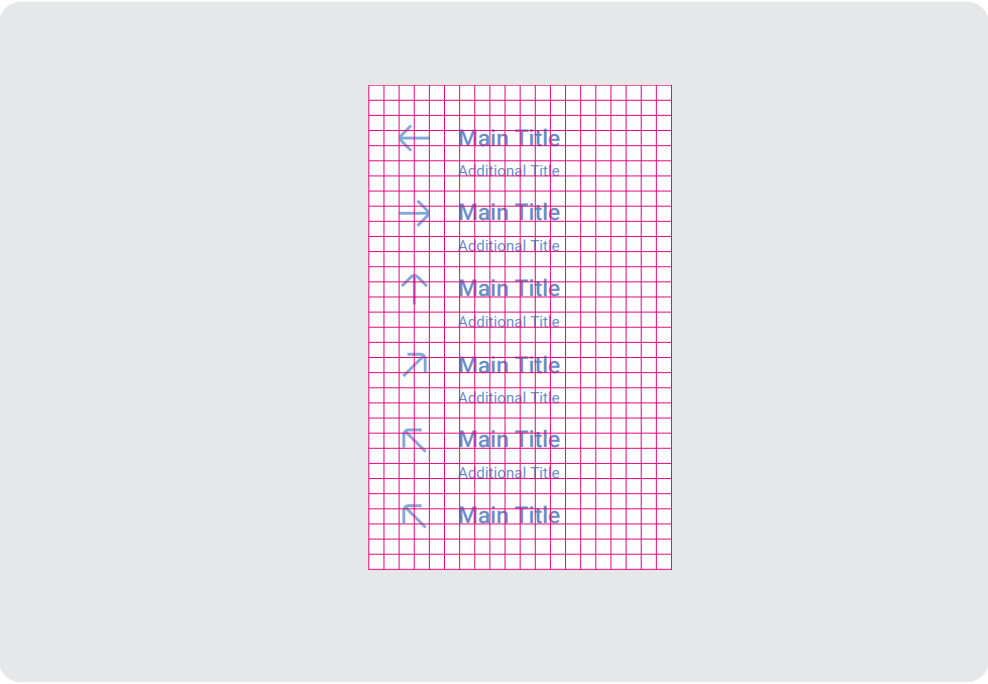

Catalog number SOL-IW-PSW-V-640

Layout specifications

Element	400 mm x 640 mm
Font size large	86 pt
Font size small	57 pt
Grid	20 x 32

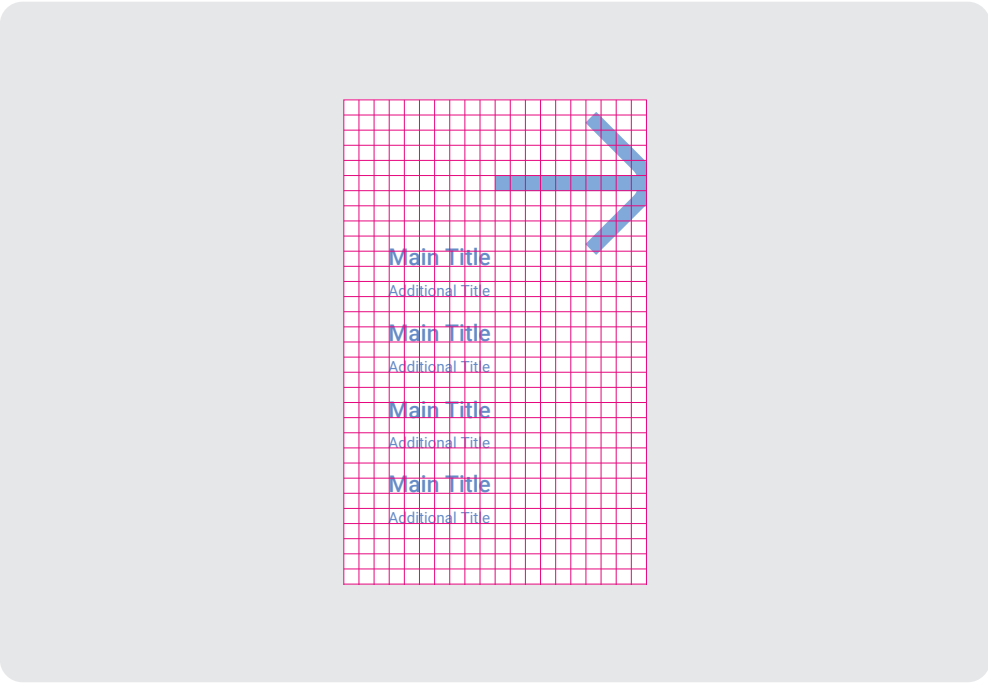


Catalogue number SOL-IW-PSW-VA-640

Layout specifications

Element	400 mm x 640 mm
Font size large	86 pt
Font size small	57 pt
Grid	32 x 20

Internal Wayfinding Panel Simple White


Variants in execution

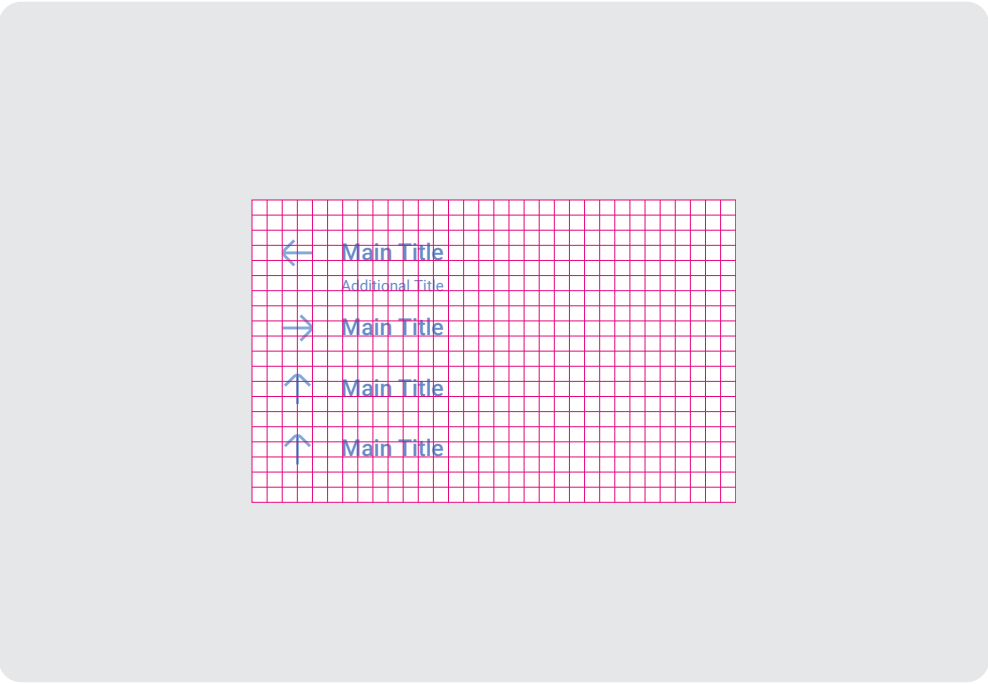

Catalog number SOL-IW-PSW-H-400

Layout specifications

Element	640 mm x 400 mm
Font size large	86 pt
Font size small	57 pt
Grid	20 x 32

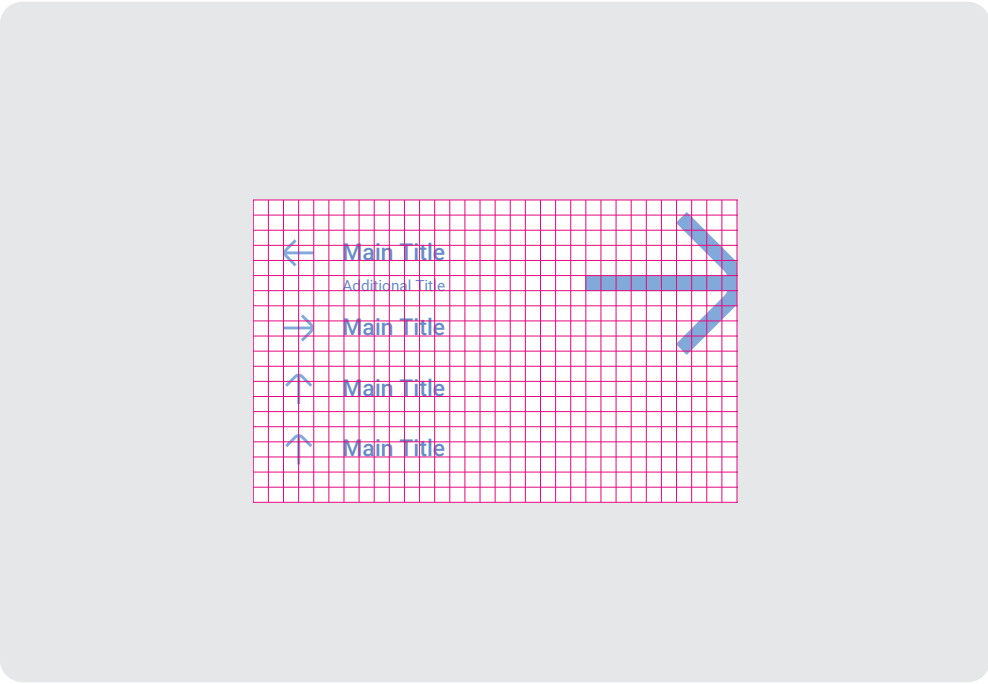

Catalogue number SOL-IW-PSW-HA-400

Layout specifications

Element	640 mm x 400 mm
Font size large	86 pt
Font size small	57 pt
Grid	32 x 20

Internal Wayfinding Panel Simple White

Size Chart

Item	Catalogue no.	Height	Width	Depth
Internal Wayfinding Panel Simple White Vertical 1000	SOL-IW-PSW-V-1000	1000 mm	625 mm	15 mm
Internal Wayfinding Panel Simple White Horizontal 625	SOL-IW-PSW-H-625	625 mm	1000 mm	15 mm
Internal Wayfinding Panel Simple White Vertical 640	SOL-IW-PSW-V-640	640 mm	400 mm	15 mm
Internal Wayfinding Panel Simple White Horizontal 400	SOL-IW-PSW-H-400	400 mm	640 mm	15 mm

Item	Catalogue no.	Height	Width	Depth
Internal Wayfinding Panel Simple White Vertical Arrow 1000	SOL-IW-PSW-VA-1000	1000 mm	625 mm	15 mm
Internal Wayfinding Panel Simple White Horizontal Arrow 625	SOL-IW-PSW-HA-625	625 mm	1000 mm	15 mm
Internal Wayfinding Panel Simple White Vertical Arrow 640	SOL-IW-PSW-VA-640	640 mm	400 mm	15 mm
Internal Wayfinding Panel Simple White Horizontal Arrow 400	SOL-IW-PSW-HA-400	400 mm	640 mm	15 mm

Factory Sign

Visualisation



Factory Sign

Application guidelines

Purpose

Wayfinding or information

Materialisation

- 5mm ACM panel with Sky Blue vinyl application (MACal 9839-10 Sky Blue)

Mounting / Installation

Wall-mounted


10mm long Nylon spacers

Ceiling-mounted

Suspended from ceiling with stainless steel materials.

Main Title

Additional Title

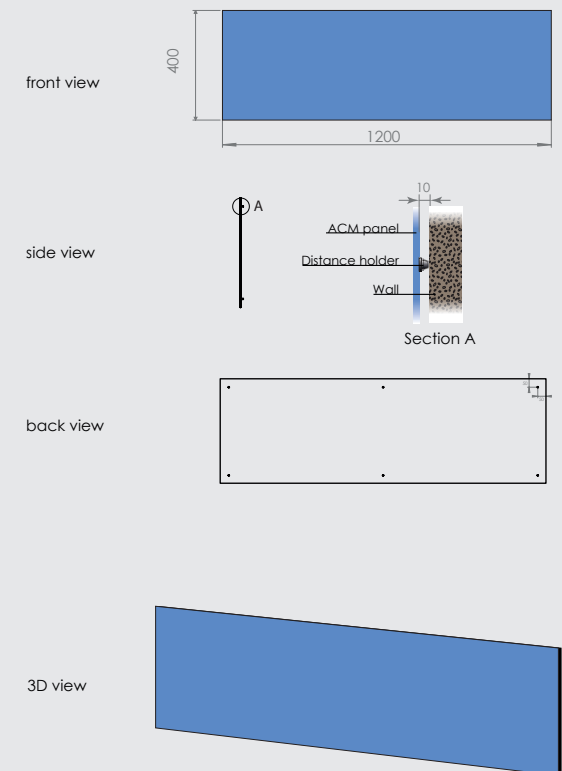

Content

Variants in execution



Catalogue number SOL-IW-FS-WM-400
Catalogue number SOL-IW-FS-CM-400

Layout specifications

Element	1200 mm x 400 mm
Font size large	285 pt
Font size small	148 pt
Grid	60 x 20



Catalogue number SOL-IW-FS-WMA-400
Catalogue number SOL-IW-FS-CMA-400

Layout specifications

Element	1200 mm x 400 mm
Font size large	285 pt
Font size small	148 pt
Grid	60 x 20

Factory Sign

Size Chart

Item	Catalogue no.	Height	Width	Depth
Internal Wayfinding Factory Sign Wall-mounted 400	SOL-IW-FS-WM-400	400 mm	1200 mm	15 mm
Internal Wayfinding Factory Sign Ceiling-mounted 400	SOL-IW-FS-CM-400	400 mm	1200 mm	5 mm
Internal Wayfinding Factory Sign Wall-mounted Address 400	SOL-IW-FS-WMA-400	400 mm	1200 mm	15 mm
Internal Wayfinding Factory Sign Ceiling-mounted Address 400	SOL-IW-FS-CMA-400	400 mm	1200 mm	5 mm

Floor Sign / Elevator Sign

Visualisation



Floor Sign / Elevator Sign

Application guidelines

Purpose

Wayfinding or information

Materialisation

Back panel



- White 5mm ACM panel
- Medium Blue numbers (Macal 9839-42 Pastel Blue)
- Sky Blue text (MACal 9839-10 Sky Blue)

Front panel

- White 5mm ACM panel
- Sky Blue Fond (MACal 9839-10 Sky Blue)
- White vinyl application content

Mounting / Installation

The Floor Sign has to be mounted near the entrance of the elevator. Mounted with Wall Bracket Comhan 130297 or equal on the wall and with 10mm spacers between the two layers. The Elevator Sign has to be mounted on a 5mm ACM panel, directly on the liftwall near the buttons. In the elevator only, the back panel can be mounted. It should be mounted with glue and/or double-sided tape.

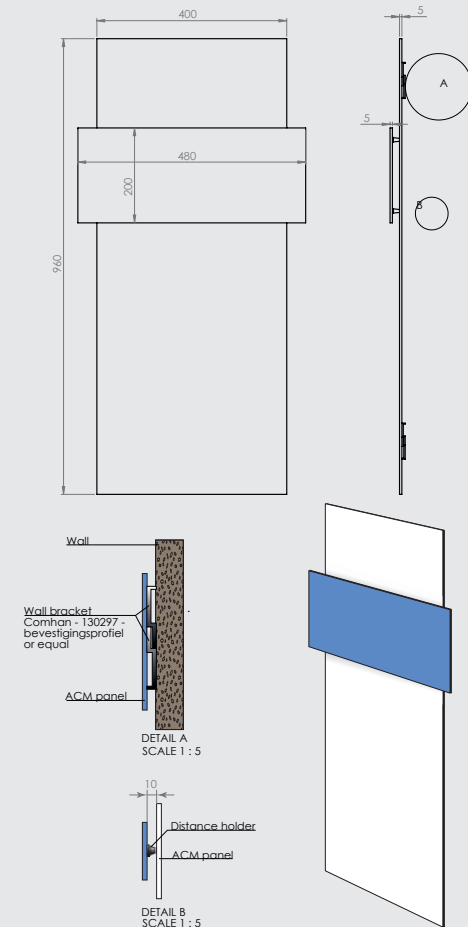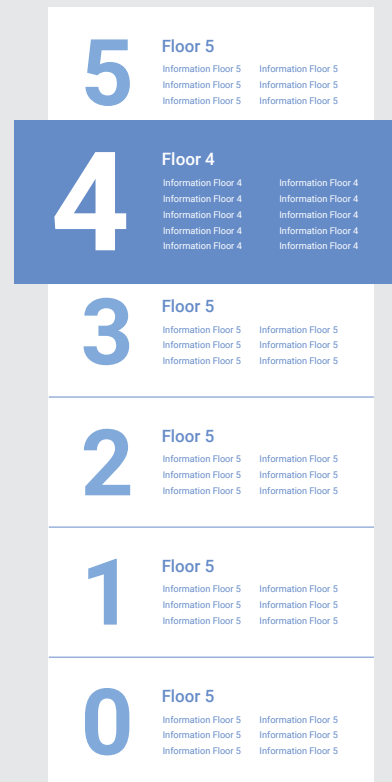

Floor Sign / Elevator Sign

Materialisation



Catalogue number SOL-IW-FS-960

Layout specifications

Element	400 mm x 960 mm
Font size large	59 pt
Font size small	32 pt
Grid	20 x 48



Catalogue number SOL-IW-ES-200

Layout specifications

Element	480 mm x 200 mm
Font size large	59 pt
Font size small	32 pt
Grid	48 x 20

Floor Sign / Elevator Sign

Size Chart

Item	Catalogue no.	Height	Width	Depth
Internal Wayfinding Floor Sign 960	SOL-IW-FS-960	960 mm	480 mm	30 mm
Internal Wayfinding Elevator Sign 960	SOL-IW-ES-960	960 mm	400 mm	5 mm

Logo sign panel

Visualisation



SOLVAY

Logo sign panel

Application guidelines

Purpose

Wayfinding or information

Materialisation

Blue

White 5mm ACM panel with:

- Sky Blue Fond (MACal 9839-10 Sky Blue)
- Medium Blue Watermark (Macal 9839-42 Pastel Blue)
- White vinyl application logo


White

White 5mm ACM panel with:

- Sky Blue Logo (MACal 9839-10 Sky Blue)


Mounting / Installation

10mm long Nylon spacers (male-female) between wall and panel

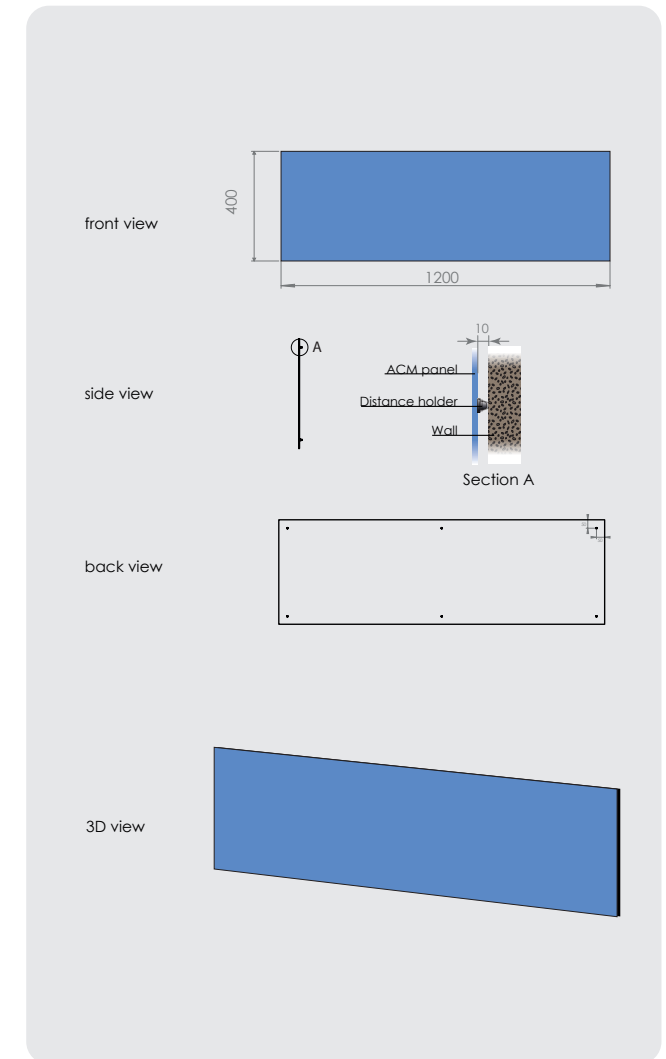

Logo sign panel


Materialisation

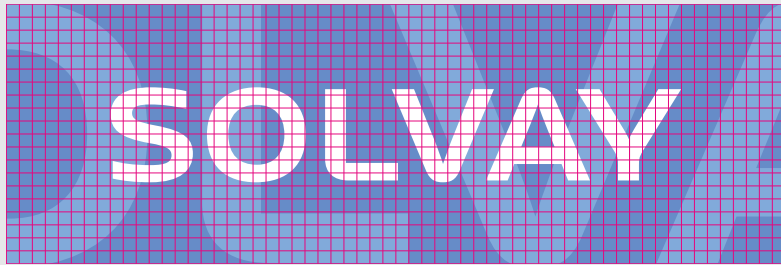

Catalogue number SOL-IW-RS-B-400

Layout specifications

Element 1200 mm x 400 mm
Grid 60 x 20

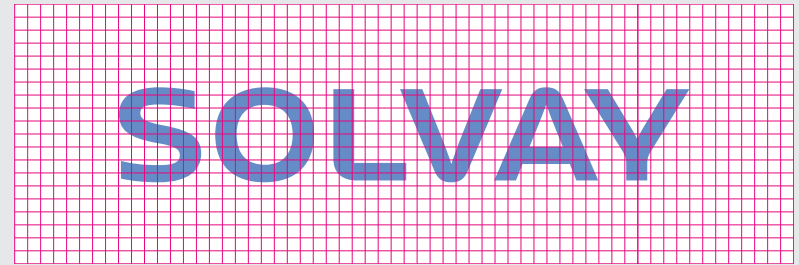

Catalogue number SOL-IW-RS-W-400

Layout specifications

Element 1200 mm x 400 mm
Grid 60 x 20

Logo sign panel

Size Chart


Item	Catalogue no.	Height	Width	Depth
Internal Wayfinding Reception Sign Blue 400	SOL-IW-RS-B-400	400 mm	1200 mm	15 mm
Internal Wayfinding Reception Sign White 400	SOL-IW-RS-W-400	400 mm	1200 mm	15 mm

Logo acrylic

Visualisation



SOLVAY

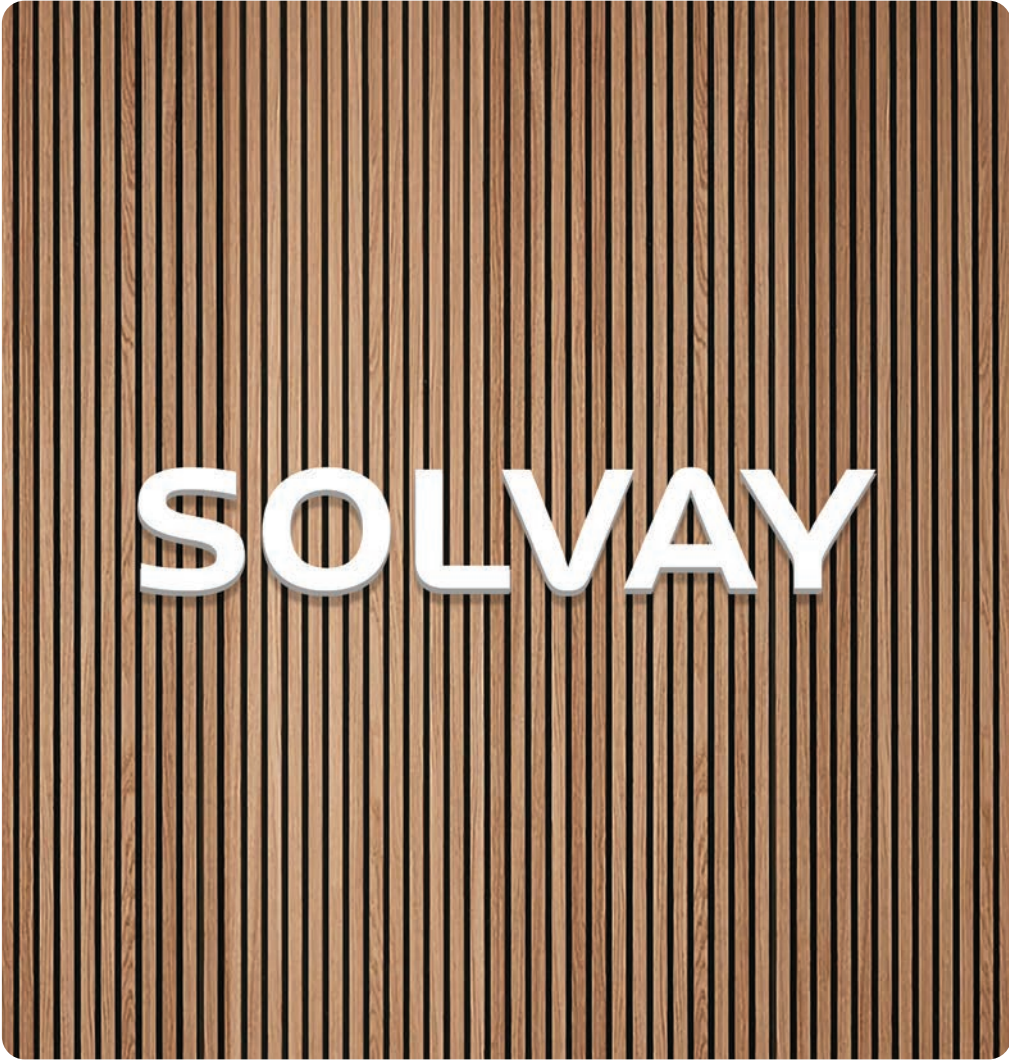

SOLVAY

Logo acrylic

Visualisation



Logo acrylic

Application guidelines

Purpose

Wayfinding or information

Materialisation

Blue:

- White 8mm milled acrylic
- Sky Blue vinyl application
(MACal 9839-10 Sky Blue) on the front

White:

- White 8mm milled acrylic

Mounting / Installation

- with 10 mm spacers or glued directly to a flat surface



SOLVAY

Logo acrylic

Materialisation



SOLVAY

Catalogue number SOL-IW-LA-B

Layout specifications

Element

TBD x TBD



SOLVAY

Catalogue number SOL-IW-LA-W

Layout specifications

Element

TBD x TBD

Logo acrylic

Size Chart

Item	Catalogue no.	Height	Width	Depth
Internal Wayfinding Logo Acrylic Blue	SOL-IW-LA-B	TBD	TBD	TBD
Internal Wayfinding Logo Acrylic White	SOL-IW-LA-W	TBD	TBD	TBD

Icon Panels

Visualisation



Icon Panels

Application guidelines

Purpose

Wayfinding or information



Materialisation

White 5mm ACM panel with:

- Sky Blue vinyl application Icon
- Medium Blue vinyl application arrow

Mounting / Installation


10mm long Nylon spacers (male-female) between wall and panel

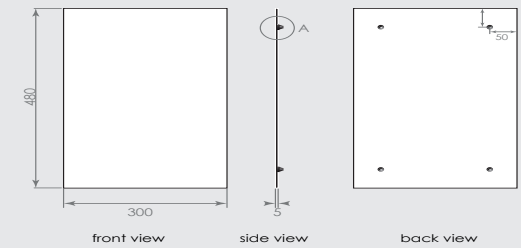

Icon Panels

Materialisation

Front

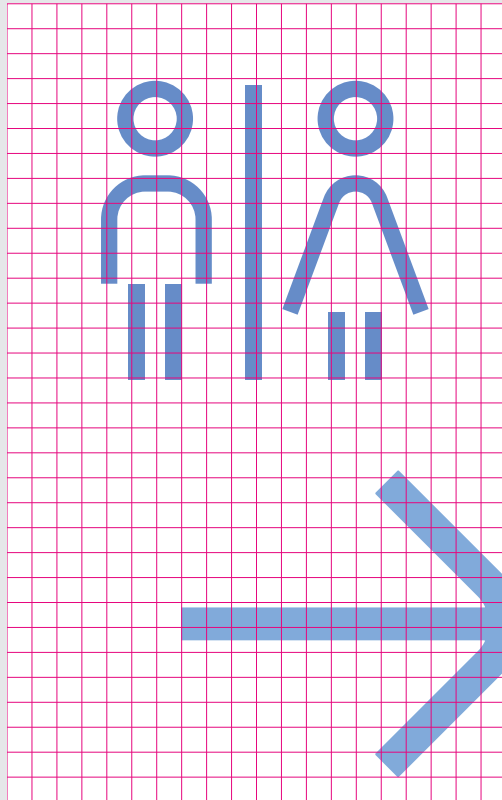

Catalogue number SOL-IW-IP-480

Layout specifications

Element

300 mm x 480 mm

Grid

20 x 32

Icon Panels

Size Chart

Item	Catalogue no.	Height	Width	Depth
Internal Wayfinding Icon Panel	SOL-IW-IP-480	480 mm	300 mm	15 mm

Location Panel

Visualisation



Location Panel

Application guidelines

Purpose



Wayfinding or information

Materialisation

White 5mm ACM panel with:
- Sky Blue content (MACal 9839-10 Sky Blue)

Mounting / Installation


10mm long Distance holder (male-female) between
wall and panel

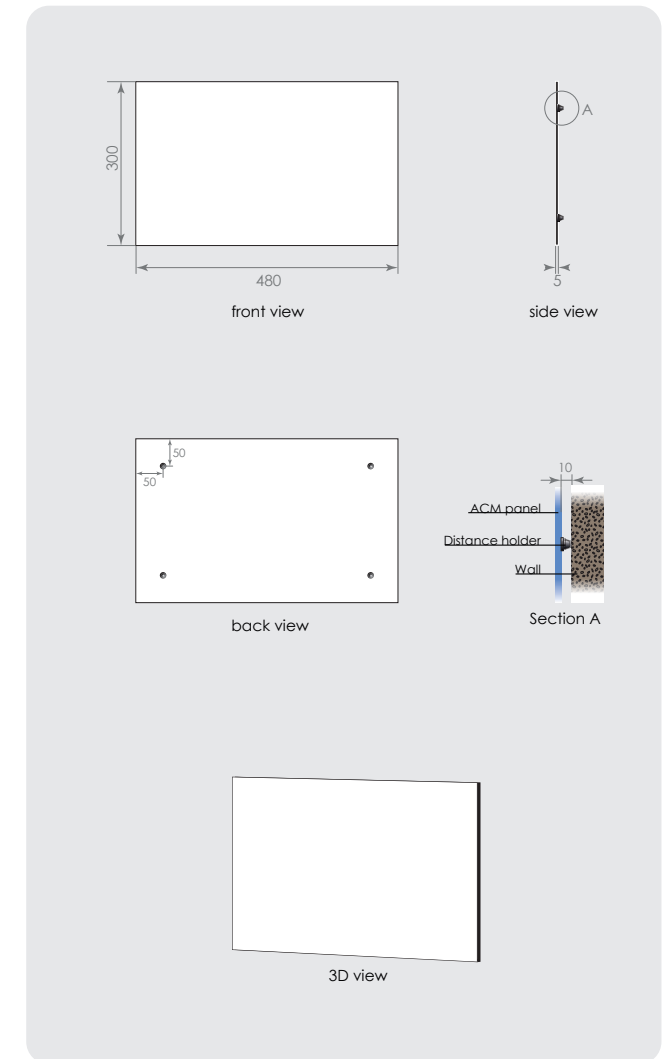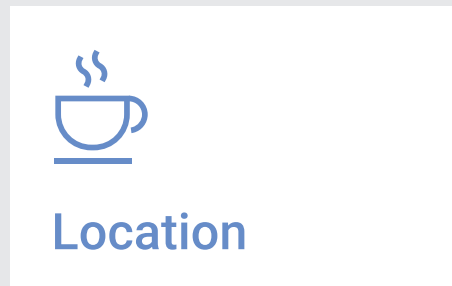

Location Panel

Materialisation

Front

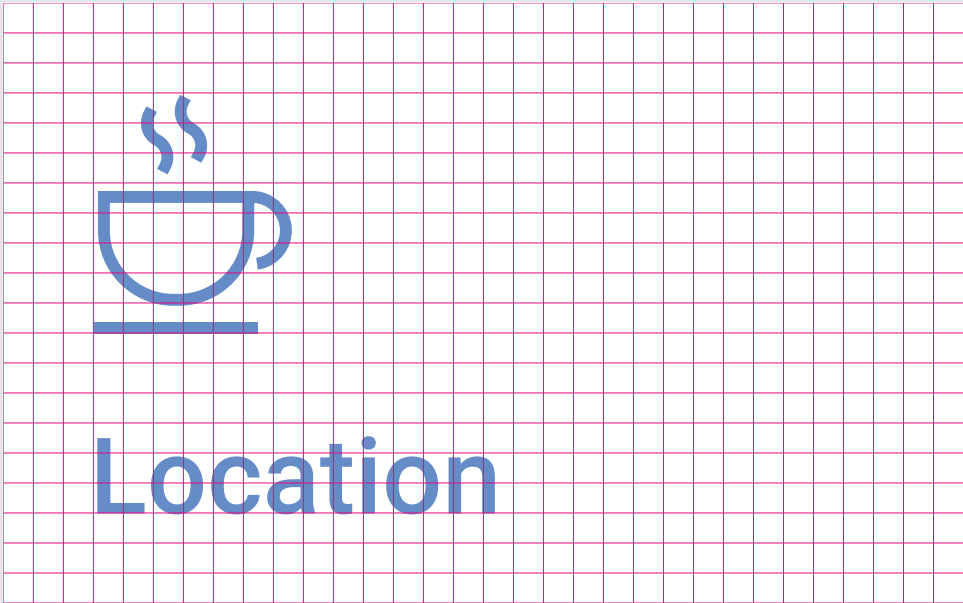

Catalogue number SOL-IW-LP-300

Layout specifications

Element	480 mm x 300 mm
Font size	150 pt
Grid	32 x 20

Location Panel

Size Chart

Item	Catalogue no.	Height	Width	Depth
Internal Wayfinding Location Panel	SOL-IW-LP-300	300 mm	480 mm	15 mm

Meeting Room

Visualisation



Meeting Room



Application guidelines

Purpose

Wayfinding or information


Materialisation

- 5 mm ACM panel
- Sky Blue Fond and Name room (MACal 9839-10 Sky Blue)
- White content vinyl application
- Or full colour printed inlay

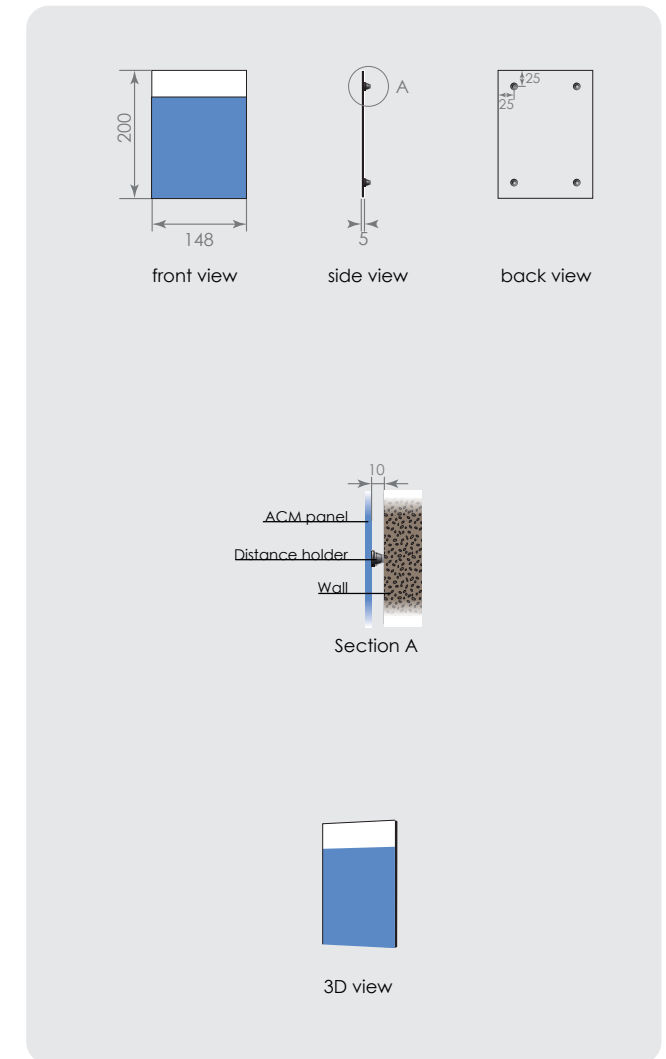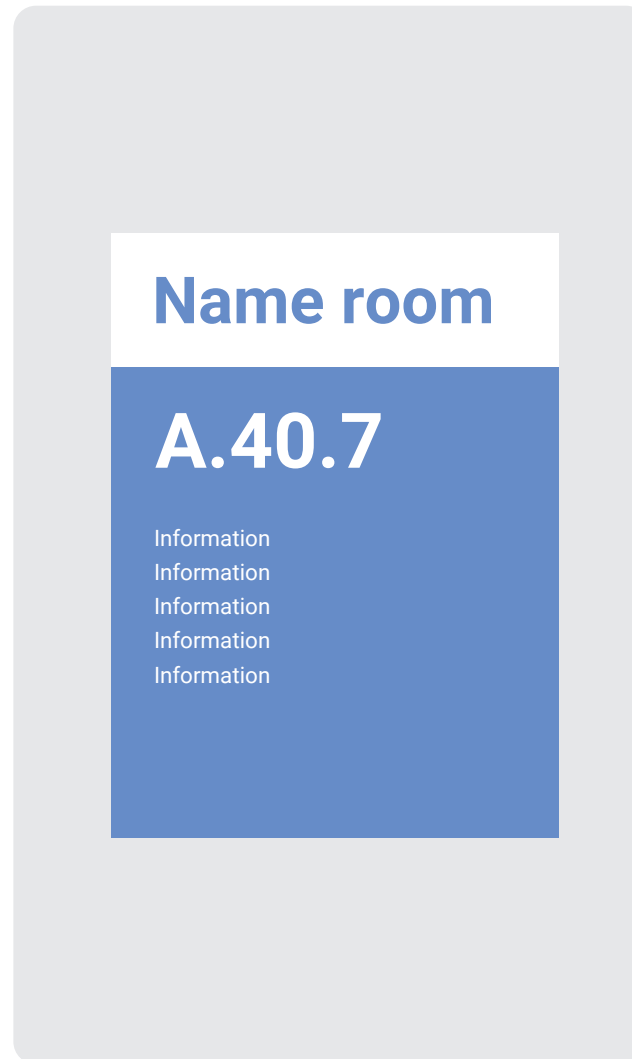

Meeting Room


Variants in execution

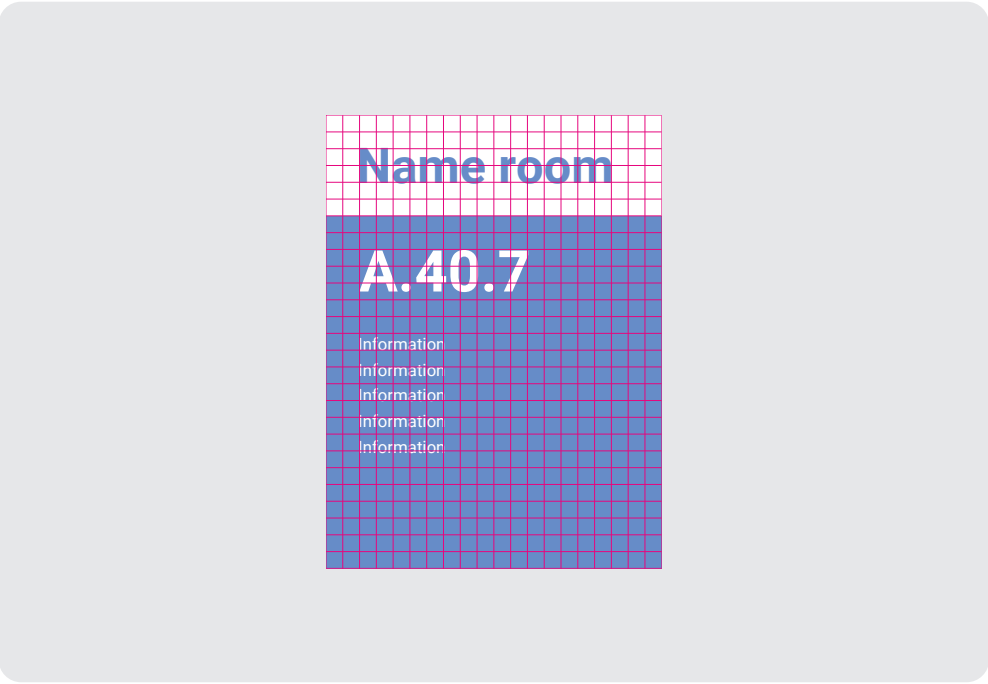

Catalogue number SOL-IW-MRV-B-200

Layout specifications

Element	148 mm x 200 mm
Font size large	444 pt
Font size medium	88 pt
Font size small	33 pt
Grid	20 x 27

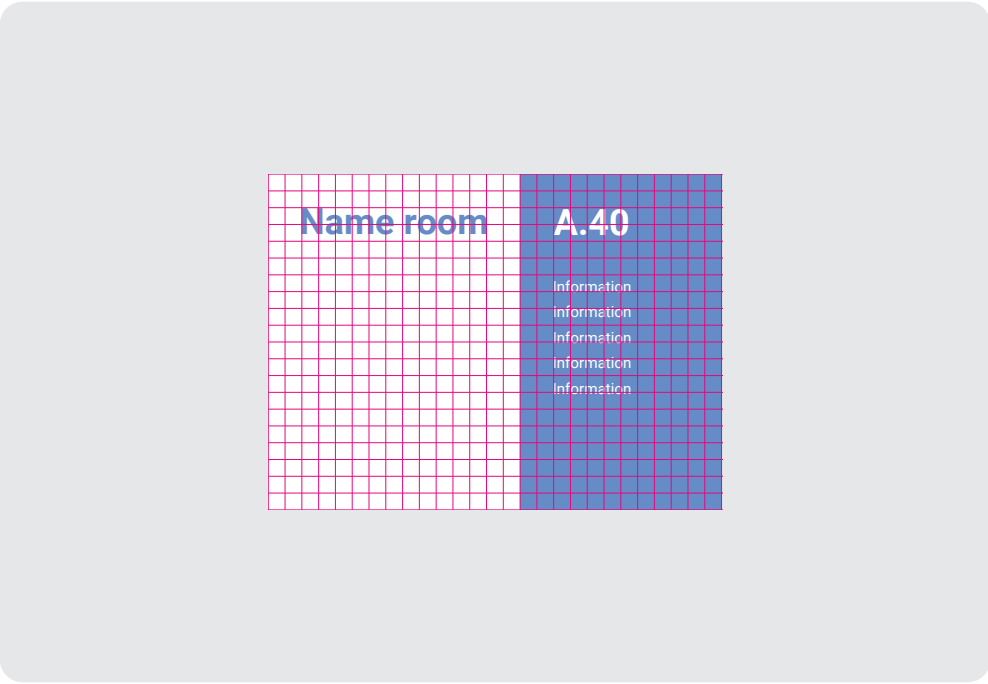

Catalogue number SOL-IW-MRH-B-148

Layout specifications

Element	200 mm x 148 mm
Font size large	324 pt
Font size medium	88 pt
Font size small	33 pt / 21 pt
Grid	27 x 20

Meeting Room

Size Chart

Item	Catalogue no.	Height	Width	Depth
Internal Wayfinding Meeting Room Vertical 200 Blue	SOL-IW-MRV-B-200	200 mm	148 mm	15 mm
Internal Wayfinding Meeting Room Horizontal 148 Blue	SOL-IW-MRH-B-148	148 mm	200 mm	15 mm

Floor number

Visualisation



Floor number Panel

Application guidelines

Purpose

Wayfinding or information

Materialisation


Vertical

White 5mm ACM panel with:

- Sky Blue Floor number big (MACal 9839-10 Sky Blue)
- Soft Blue Floor number small (Macal 9839-42 Pastel Blue)
- Sky Blue Content (MACal 9839-10 Sky Blue)

Mounting / Installation

10mm long Distance holder (male-female) between wall and panel

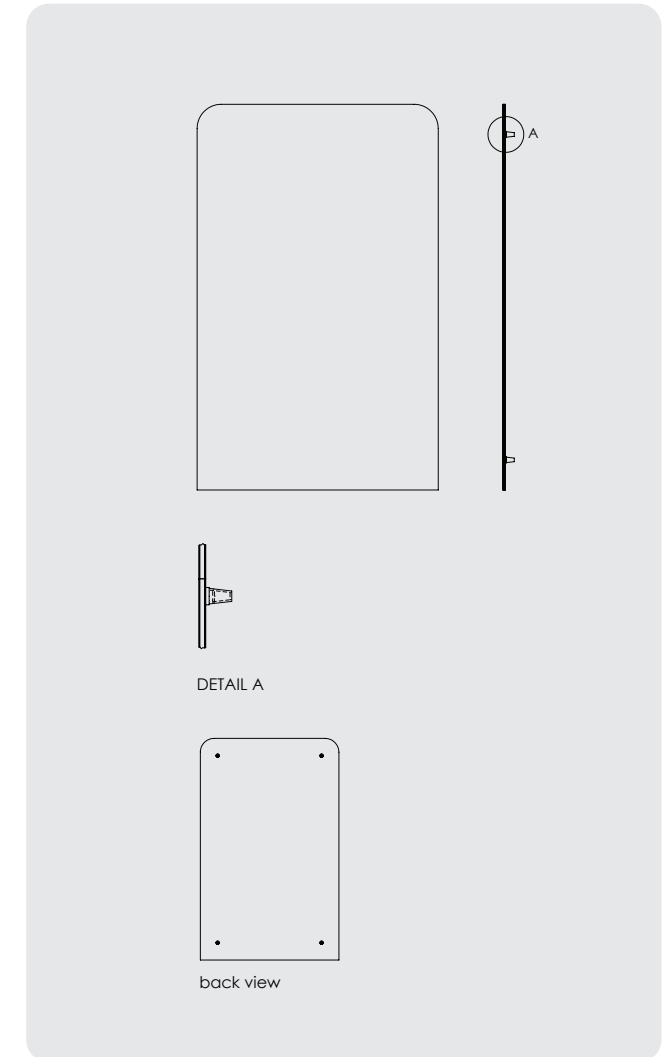

Floor number Panel

Materialisation

Front



Catalogue number SOL-IW-FNP-1000

Layout specifications

Element	1000 mm x 1000 mm
Font size number large	Scale to define size
Font size number small	1100 pt
Font size content large	135 pt
Font size content small	90 pt
Grid	20 x 20

Floor number Panel

Size Chart

Item	Catalogue no.	Height	Width	Depth
Internal Wayfinding Floor Number Panel 1000	SOL-IW-FNP-1000	1000 mm	1000 mm	15 mm

Floor number Vinyl

Application guidelines

Purpose

Wayfinding or information

Materialisation

Printed and contour-cut wall film. The film should be suitable for the substrate with a lifespan of at least 7 years.

- Sky Blue Floor number big: CMYK 82/32/0/0
- Soft Blue Floor number small: CMYK 54/22/0/0
- Sky Blue Content: CMYK 82/32/0/0

Mounting / Installation

Direct on the wall.



Floor number Vinyl

Materialisation

Front

- ← Main Title
Additional Title
- Main Title
Additional Title
- ↑ Main Title
Additional Title



Catalogue number SOL-IW-FN-VA

Layout specifications

Element	Variable
Font size number large	Variable
Font size number small	Variable
Font size content large	Variable
Font size content small	Variable

Floor number Vinyl

Size Chart

Item	Catalogue no.	Height	Width
Internal Wayfinding Floor Number Vinyl Application	SOL-IW-FN-VA	tbd	tbd

Reception

Visualisation



Reception Acrylic white

Application guidelines

Purpose

Wayfinding or information

Materialisation

Acrylic letters

- white 16mm acrylic letters
- mounted with 10mm spacers or direct to the wall

Seamless full-colour printed wallpaper

- Sky Blue background (CMYK 82/32/0/0)
- Medium Blue watermark (CMYK: 54/22/0/0)



Reception acrylic letters blue

Application guidelines

Purpose

Wayfinding or information

Materialisation

Acrylic letters

- White acrylic 16mm milled letters
- Spray-painted NCS: S 1560 - R90B) or on the front MACal 9839-10 Sky Blue
- mounted with 10mm spacers

Mounting / Installation

Direct on the wall.



SOLVAY

Reception

Size Chart

Item	Catalogue no.	Height	Width	Depth
Internal Wayfinding Reception Acrylic letters Blue	SOL-IW-RAL-B-250	250 mm	1500 mm	26 mm
Internal Wayfinding Reception Acrylic letters White	SOL-IW-RAL-W-250	250 mm	1500 mm	26 mm

Privacy Vinyl Applications

Visualisation



Privacy Vinyl Applications

Application guidelines



Catalogue number SOL-IW-PVA-C

Purpose

Privacy in window areas

Materialisation

- Dusted etched vinyl application
- Clear view gloss laminated vinyl (CMYK 82/32/0/0)

Mounting / Installation

Glass-mounted

Dusted etched:

1000 mm height

Bottom of the track 1000mm to the floor surface

Mounted outside the room




Printed Clear view

Covers the glass from top to bottom

Mounted in the inside of the room

Concept safety vinyl Solvay elements

Solvay ECo

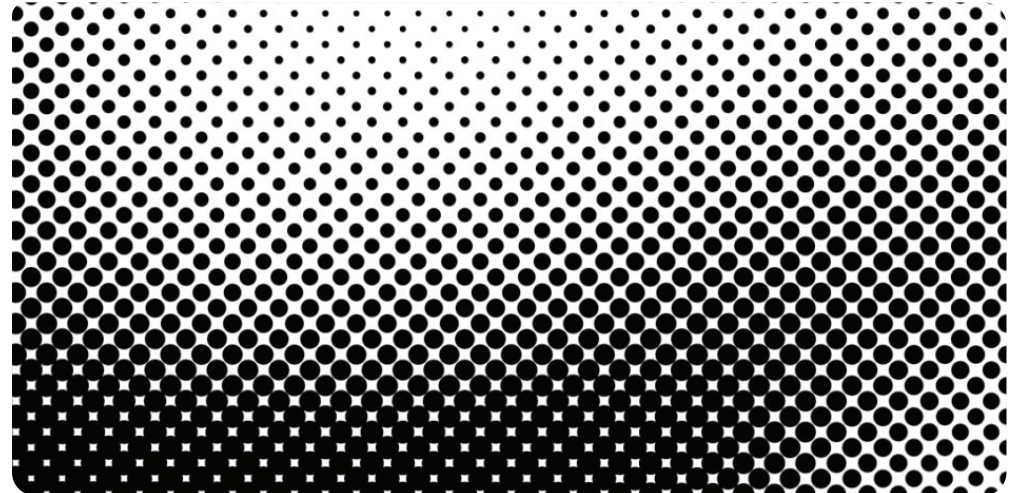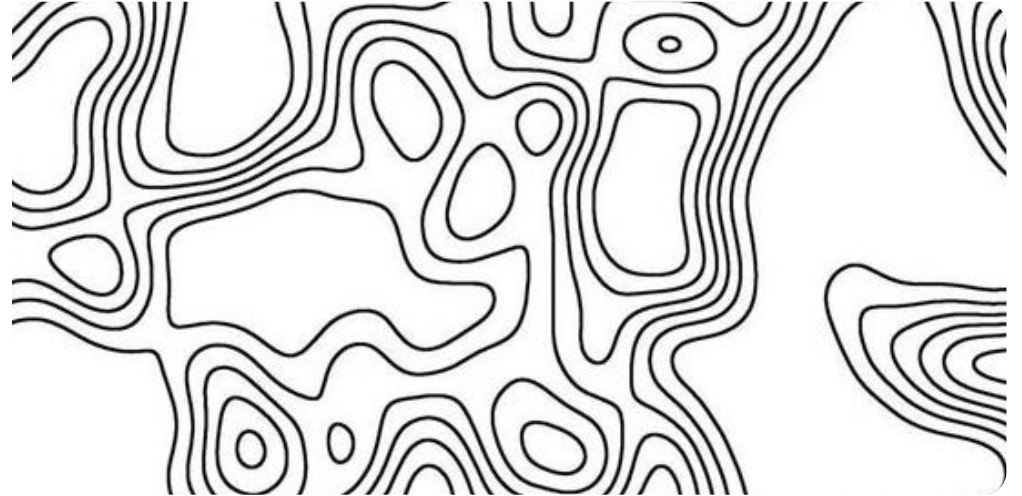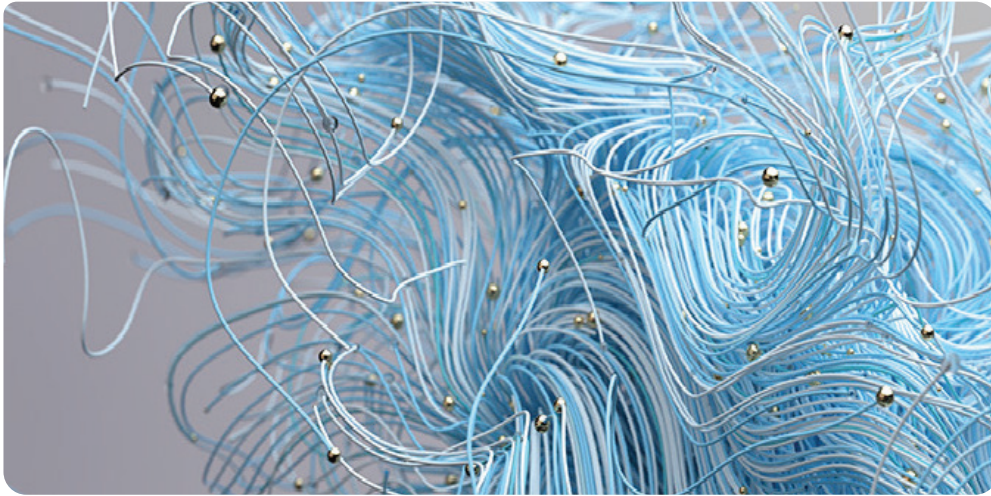

Concept safety vinyl Solvay elements

Solvay ECo



Concept safety vinyl Solvay elements

Visualisation



Privacy Vinyl Applications

Size Chart

Item	Catalogue no.	Height	Width
Internal Wayfinding Privacy Vinyl Application Etched	SOL-IW-PVA-E	1000 mm	tbd
Internal Wayfinding Privacy Vinyl Application Colour	SOL-IW-PVA-C	tbd	tbd

Safety Vinyl Glass Doors

Visualisation



Safety Vinyl Glass Doors

Application guidelines

Materialisation

Dusted etched vinyl application

- Mounted inside the room
- 200 mm height
- Horizontally centred behind opaque logo and possibly sloping on the glass

Opaque Sky Blue (MACal 9839-10 Sky Blue)

- outside the room
- 75 mm x 450mm
- Horizontally centred on the glass doors to be opened
- Centre of the logo 1600 mm to Floor Surface



Safety Vinyl Glass Doors

Size Chart

Item	Catalogue no.	Height	Width
Internal Wayfinding Safety Vinyl Glass Door Double Sided 200	SOL-IW-SV-GD-DS-200	200 mm	> 1200 mm

Vinyl Applications - logo

Variants in execution



Catalogue number SOL-IW-SV-VB-L

Layout specifications

Element Different sizes



Catalogue number SOL-IW-SV-VW-L

Layout specifications

Element Different sizes



Catalogue number SOL-IW-SV-VE-L

Layout specifications

Element Different sizes

Vinyl Applications

Application guidelines

Purpose

Privacy on window areas

Materialisation

- Opaque Sky Blue (MACal 9839-10 Sky Blue)

Mounting / Installation

Glass-mounted

Centre logo 1600 mm distance to floor surface

Bounding box has to be respected



SOLVAY

Vinyl Applications

Materialisation

Purpose

Privacy on window areas

Materialisation

- White opaque vinyl application

Mounting / Installation

Glass-mounted

Centre logo 1600mm tot floor surface Bounding box has to be respected



SOLVAY

Vinyl Applications

Materialisation

Purpose

Privacy on window areas

Materialisation

Glass-mounted

Centre logo 1600mm tot floor surface Bounding box has to be respected

Mounting / Installation

Dusted Etched vinyl application



SOLVAY

Vinyl applications

Size Chart

Item	Catalogue no.	Height	Width
Internal Wayfinding Vinyl Sky Blue Logo	SOL-IW-SV-VB-L	tbd	tbd
Internal Wayfinding Vinyl White Logo	SOL-IW-SV-VW-L	tbd	tbd
Internal Wayfinding Vinyl Etched Logo	SOL-IW-SV-VE-L	tbd	tbd

Solvay ECo

Icons



Icons

Overview

